


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P30B25M	5.8kg

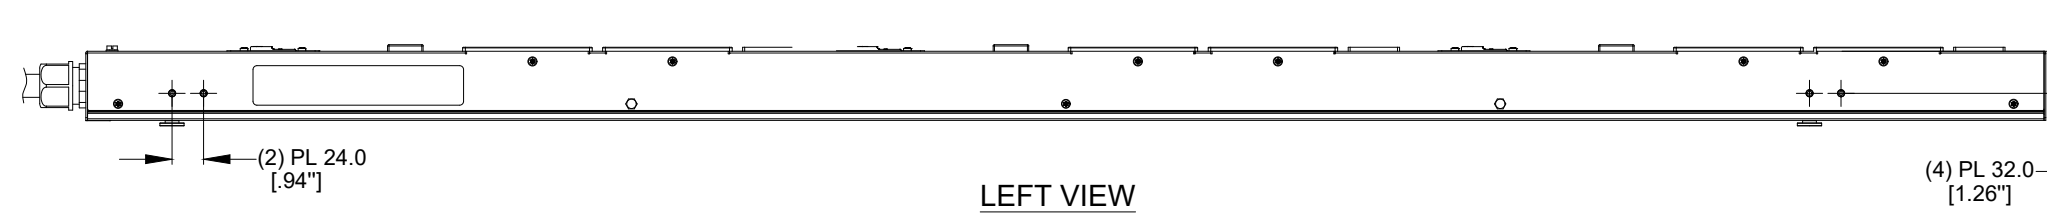


**SPECIFICATION:**  
 1. STANDARD:  
 UNIT TYPE: BASIC  
 ORIENTATION: VERTICAL, MID  
 OUTLET QTY&TYPE: (24)C13, (3)C19, (3)5-20R  
 INPUT VOLTAGE: 100-120/200-240VAC  
 INPUT CURRENT: 30A (24A DERATED)  
 BREAKER QTY&TYPE: (3) 20A,DOUBLE-POLE  
 INPUT PHASE: THREE-PHASE WYE  
 RATED POWER: 8.6kVA  
 INPUT PLUG: NEMA L21-30P  
 INPUT POWER CORD: 3m [10'], TOP FEED  
 REGULATORY STANDARD: RoHS COMPLIANT

2. ADDITIONAL: NONE  
 3. ACCESSORIES:  
 POCKET GUIDE  
 QTY: (6) 5-20R ZIP TIE

**NOTES:**  
 1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN INCHES  
 2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES  
 3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART  
 4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL  
 5. OUTLETS ARE WIRED LINE TO LINE (208V)

**IDENTIFICATION**

PART NUMBER	DESCRIPTION
P30B25M	BASIC PDU, 30AMP, (24)C13(3)C19(3)5-20R, NEMA L21-30P-3M, BLACK



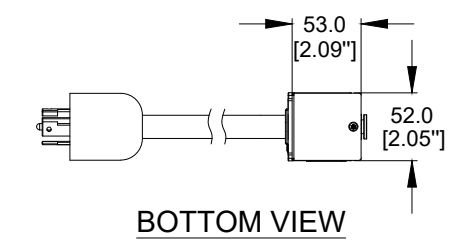


B

B

A

A

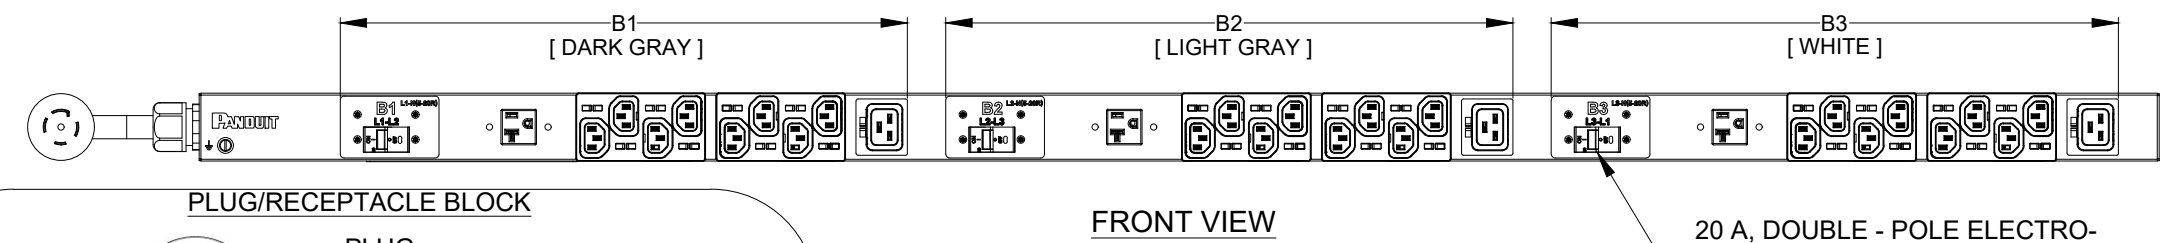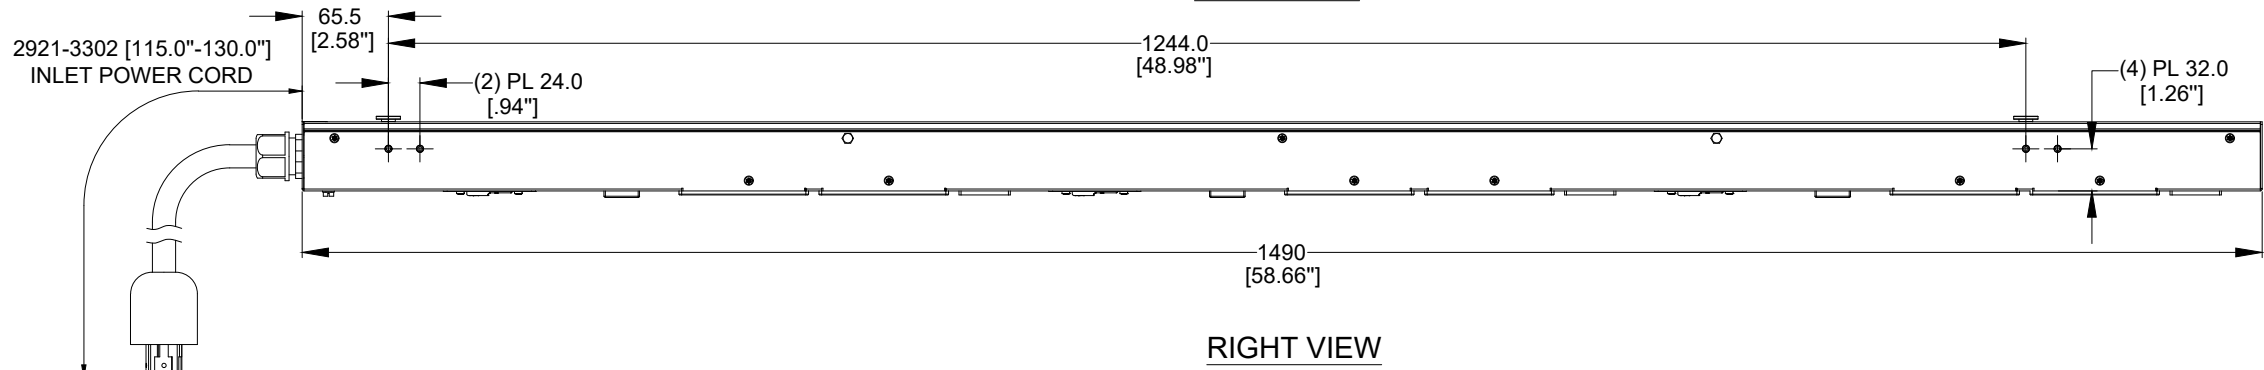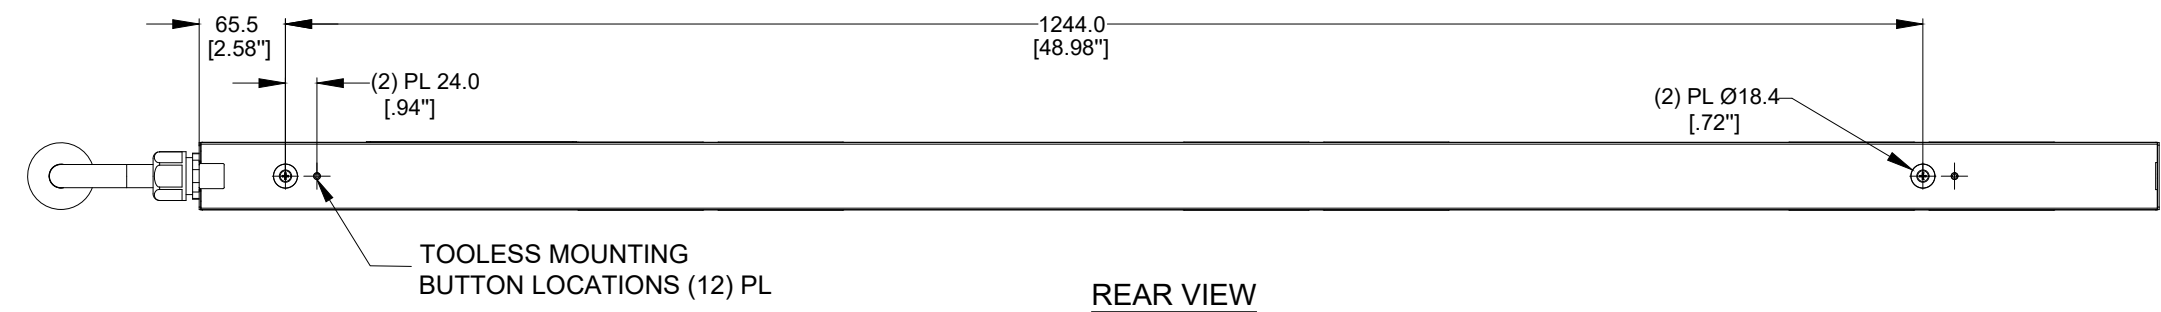

**PLUG/RECEPTACLE BLOCK**

- PLUG**  
NEMA L21 - 30P, 4P 5W  
30A, 120/208V MAX RATED INPUT  
24A DERATED
- RECEPTACLES**  
IEC 60320/C19  
16A, 250V MAX RATED OUTPUT
- RECEPTACLES**  
NEMA 5 - 20R  
16A, 125V MAX RATED OUTPUT
- RECEPTACLES**  
IEC 60320/C13  
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02B	04/08/2022	CWW	MIM	JAWI	ADDED *OUTLETS ARE WIRED LINE TO LINE (208V)*IN NOTE 5	P30B25M
02A	05/26/2020	Leo	MIM	JAWI	UPDATED THE DESCRIPTION & UPDATED THE OUTLET DESIGN	P30B25M
01B	08/21/2017	DI.ZHAI	MIM	EDM	REVISED TOLERANCES	P30B25M
01A	06/28/2017	DI.ZHAI	MIM	EDM	INITIAL RELEASE	P30B25M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN	DATE	PRINT

TITLE: BASIC SERIES PDU P30B25M CUSTOMER DRAWING

ITEM REVISION NAME: **PANDUIT**

DATASHEET FILE NAME: **PANDUIT**

UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)	±
0<L<50	±0.5
50<L<250	±1.0
250<L<500	±1.5
500<L<1000	±2.5
1000<L<2000	±4.0

MATERIAL/COLOR: N/A

DRAWING NUMBER: P30B25M\_DC

THIRD ANGLE PROJECTION

DRAWN BY	DATE	CHK	SCALE
DI.ZHAI	05/24/2017	SEAN	NONE

SHT 1 OF 1

2

1