



**MILBANK**<sup>®</sup>  
ENERGY AT WORK

## U5892-X-2/200-K3L-5T6- MLK-AMS






<b>Catalog Number</b>	U5892-X-2/200-K3L-5T6-MLK-AMS
<b>Marketing Product Description</b>	5 Terminal Ringless Large Closing Plate Lever Bypass 2-200 Ampere Main Breaker 20 Branch Circuit Single Connector 4-600kcmil Ameren
<b>UPC</b>	784572705104
<b>Length (IN)</b>	5.97
<b>Width (IN)</b>	29.5
<b>Height (IN)</b>	35
<b>Brand Name</b>	Milbank
<b>Type</b>	Ringless Meter Socket
<b>Special Features</b>	Ameren Energy
<b>Application</b>	Meter Socket With Main And Load Center
<b>Standard</b>	UL Listed;Type 3R
<b>Voltage Rating</b>	600 Volts Alternating Current
<b>Amperage Rating</b>	320 Continuous Ampere
<b>Phase</b>	1 Phase
<b>Frequency Rating</b>	60 Hertz
<b>Size</b>	5.97L x 29.5W x35H
<b>Number Of Cutouts</b>	2
<b>Cutout Size</b>	Two 200 Ampere Main Breakers

<b>Cable Entry</b>	Overhead or Underground
<b>Terminal</b>	Single Mechanical
<b>Insulation</b>	Glass Polyester
<b>Mounting</b>	Surface Mount
<b>Enclosure</b>	G90 Galvanized Steel with Powder Coat Finish
<b>Jaw Quantity</b>	5 Terminal
<b>Bypass Type</b>	Lever Bypass
<b>Number of Meter Positions</b>	1 Position
<b>Equipment Ground</b>	3 Barrel Ground Lug
<b>Hub Opening</b>	Large Closing Plate
<b>Line Side Wire Range</b>	4 AWG - 600 kcmil or Two 1/0 AWG - 250 kcmil
<b>Load Side Wire Range</b>	1 AWG - 300 kcmil
<b>Number Branch Circuits</b>	22
<b>Number Of Receptacles</b>	0

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	2	STD. MNTG. EMBOSS
B	2	5/16 SOLID K.O.
C	8	¼, ½ CONC. K.O.
D	6	½, ¾, 1 CONC. K.O.
E	4	1¼, 1½, 2, 2½ CONC. K.O.
F	1	3, 3½, 4 CONC. K.O.

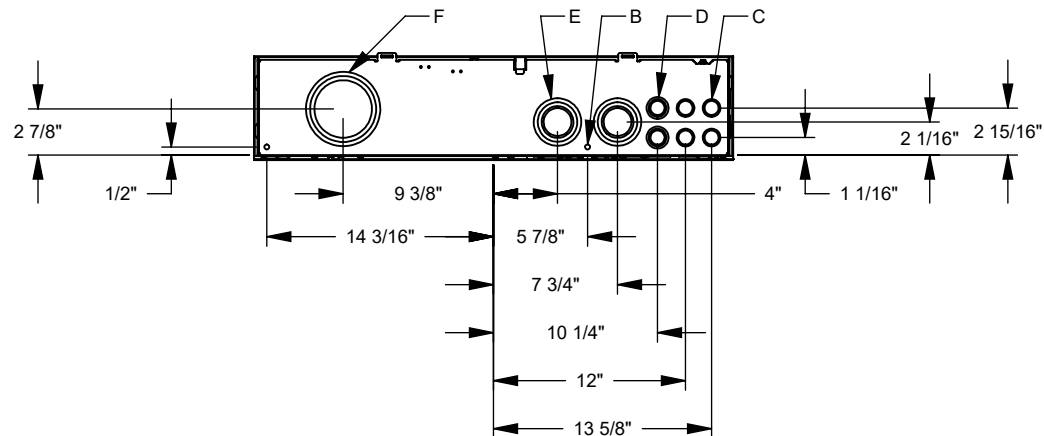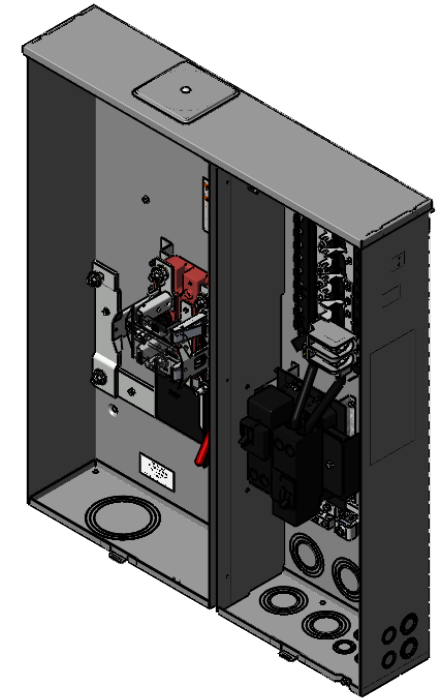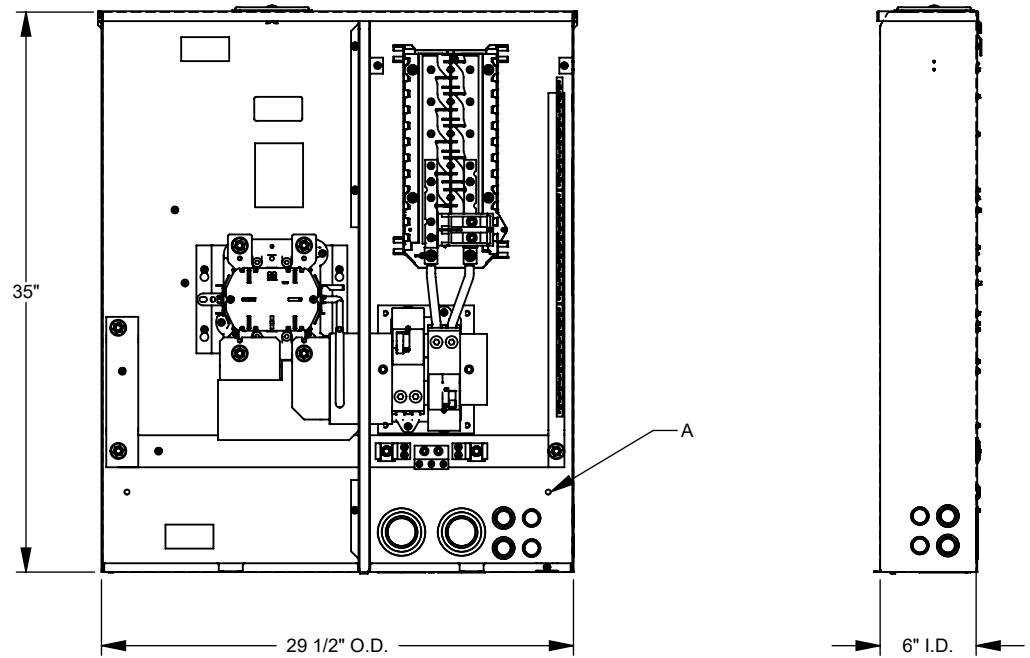

Version:

1

**All dimensions are +/- 1/16".  
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.