

Emergency Switching Luminaire Control



ECS00-110



ECS00-103

Description

The Leviton Emergency Switching Luminaire Control allows you to specify and install a UL-924 listed emergency power control device that can convert and control up to 20 regular light fixtures as approved emergency lights. These emergency lights can then be turned ON and OFF in the same manner as regular lights.

The Emergency Switching Luminaire Control automatically illuminates connected emergency loads to full brightness upon utility power interruption, regardless of switch/dimmer position.

Applications

Ideal for designated dimmable emergency luminaires in public places such as:

- Auditoriums
- Restaurants
- Conference rooms
- Theaters
- Classrooms
- Retail spaces
- Municipal buildings
- Houses of worship

Features


- **Automatic Diagnostic**—when the room switch is turned OFF, the emergency luminaires stay on for 2.5 seconds and indicate that an emergency power source is available and the equipment is functioning correctly
- **Mounting**—either flush mount or mount above a suspended ceiling in a single-gang plaster ring makes installation simple for varying applications
- **Power Indicator**—LED for utility power (green) for easy verification of normal power

Product Data

ECS00-1xx


Wiring Diagrams—Suggested - ECS00-110

A common switch controls both normal and emergency lighting in a space. Upon loss of normal power, the emergency lighting comes on regardless of switch position.

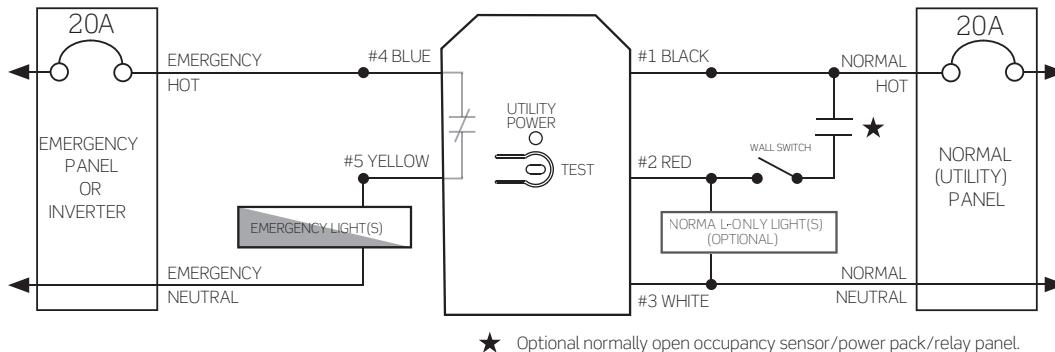


Wiring Diagrams—Shunt - ECS00-110

A dedicated switch controls emergency lighting in a space. Upon loss of normal power, the emergency lighting comes on regardless of switch position.

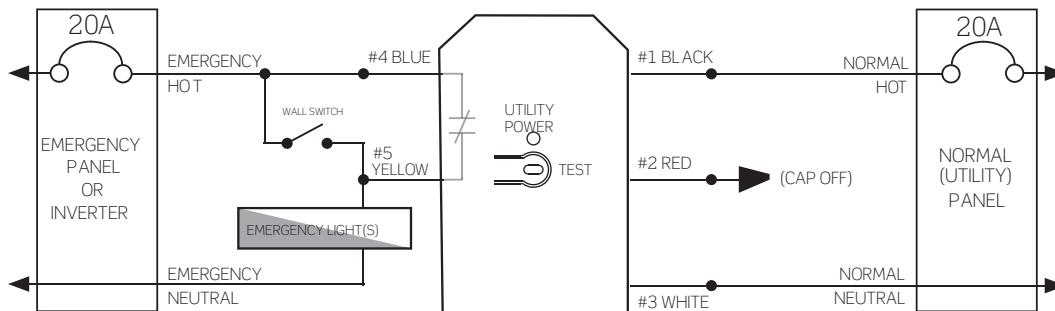


Wiring Diagram—ECS00-103

Room with (1) light fixture

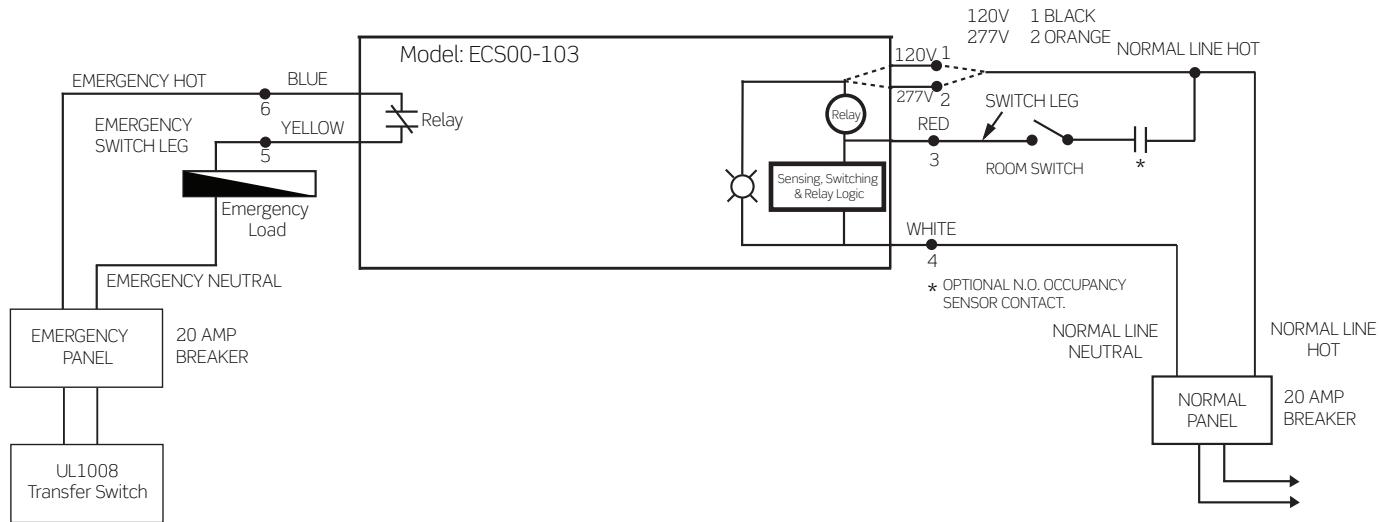


Wiring Diagram—ECS00-103

Dual light level switching

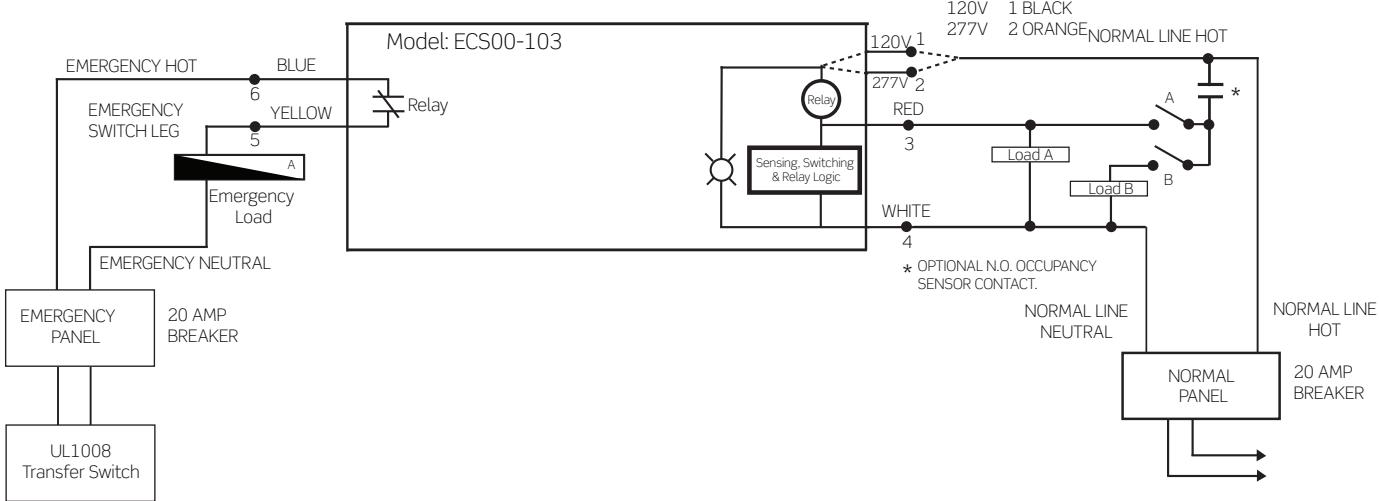

Wiring Diagram—ECS00-103

(2) Three-way switches

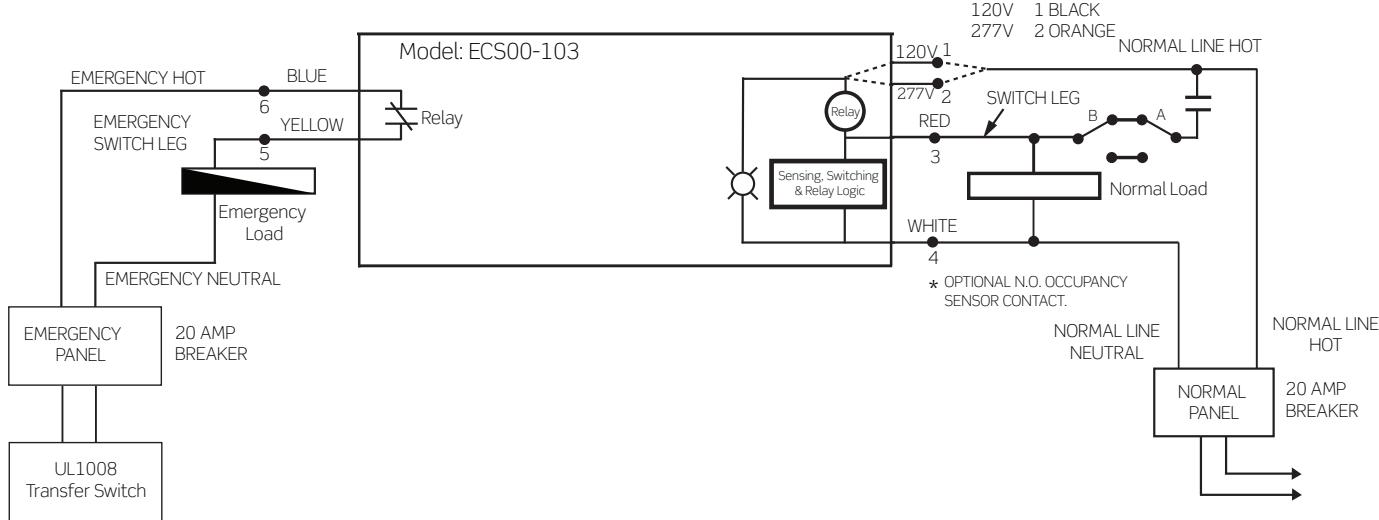

Specifications

Electrical	ECS00-103	ECS00-110
Sensing Input	120 or 277V	
General Purpose		
Ballast	3A, 60Hz	16A, 60Hz
Tungsten/Incandescent		
Electronic Ballast/LED Loads	Not rated for LED loads	5A, 60Hz
Voltage Tolerance	+/- 15%	
High Voltage Surge Protection	Up to 50,000V	
Contacts	Normally closed contacts	
Physical		
Mounting	Fixture Mount model includes mounting ears	Mounts inside a 4 11/16" (119.06mm) junction box with an extension and blank cover
Dimensions (with mounting ears)	4.86" W x 1.06" H x 1.06" D (123.83mmx26.92mmx26.92mm)	3.63" W x 1.63" H x 1.38" D (92.20mmx41.40mmx35.05mm)
Weight	0.4 lb (0.18kg)	0.5 lb (0.23kg)
Ambient Temperature	32°F - 140°F (0°C - 60°C)	
IP Rating	IP20	
Listings	UL Listed to UL924, cUL/US	

Ordering Information

Emergency Power Control

Cat. No.	Description
ECS00-103	Emergency Power Control, fixture mount, switching loads transfer and shunt relay, 120-277VAC, 16A, 60Hz
ECS00-110	Emergency Power Control, switching loads transfer and shunt relay, 120-277VAC, 10A, 60Hz

Leviton Manufacturing Co., Inc. Lighting & Controls

10385 SW Avery Street, Tualatin, OR 97062 **tel** 800-736-6682 **tech line** (6:00AM-4:00PM PT Mon-Fri) 800-959-6004

Leviton Manufacturing Co., Inc. Global Headquarters

201 North Service Road, Melville, NY 11747-3138 **tel** 800-323-8920 **tech line** (8:00AM-10:00PM ET Mon-Fri, 9:00AM-7:00PM ET Sat, 9:00AM-5:00PM ET Sun 800-824-3005

Visit our Website at: www.leviton.com/emergencycontrols

©2025 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.