FHEC30


Thermoplastic Micro LED Exit Sign/Emergency Light Combo

- Push-to-test Switch
  LED Charge Indicator
- Universal single face and double face (extra faceplate included)
- Fully adjustable glare free lighting heads
- Ni-Cd battery
- Field replaceable snap out/in chevron directional indicator
- Universal mounting pattern knockout in
- Snap-fit faceplate installs without use of tools
- Dual voltage 120V/277V
- UL 924 listed for damp location


General Specifications

	Red	Green
Input Voltage	120/277VAC	
Input Current (120V)	44mA	30mA
Input Current (277V)	175mA	13mA
Input Power (120V)	5W	3.22W
Input Power (277V)	4.8W	3.18W
Operating Frequency	60Hz	
Operating Ambient Temperature Range (Ta)	20°C to 30°C / 68°F to 86°F	
Overall Size	17.9” L x 8.2” H	
Emergency Operation	90 minutes	
Compliance	cULus 924 Listed	
	Damp Location	
Warranty	5 years from the date of manufacture	

Mechanical Data

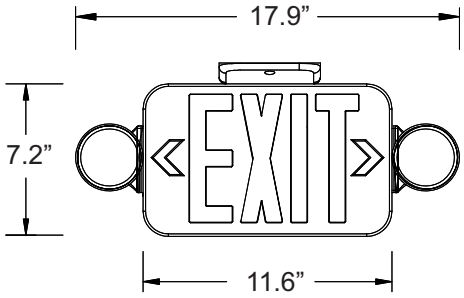

FRONT VIEW



SIDE VIEW

NOTE:
1) In order to maintain proper operation and warranty coverage, the battery must be recharged once per year prior to installation.
2) Spanish "Salida" faceplate also available, must be purchased separately.
   Part numbers:
   - FHE30-20SFG= Green lettering
   - FHE30-20SFR= Red lettering

Part Number Matrix

FHEC30	W	R	H
	Case Color **W** = White **B** = Black	Letter Color **R** = Red **G** = Green	Options **H** = High Lumen

Fulham Co. Inc.: 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-323-779-2980 Fax.: 1-323-754-9060. order@fulham.com www.fulham.com
Specifications subject to change without notice.