

# Liquid Tight Connectors

**Catalog Number:** 4Q975LT

**UPC:** 736953018044

## Description

### 3/4 Inch 90 Degree LT Connector w/ Ground

PVC coated liquid tight connectors with ground are used with liquid tight conduit to wire motors, transformers, processing equipment, pumps, etc. The flexible conduit and the PVC coated connector work together to seal out water and other corrosive liquids, protecting the conductors from damage.

## Application

- Used with liquid tight conduit to wire motors, transformers, processing equipment, pumps, and more.

## Features

- 13 trade sizes from 3/8" through 6"
- 2 mil green urethane interior coating
- 40 mil gray PVC exterior coating
- Available in straight, 45° or 90° body configurations
- Available with an external grounding lug
- Sealing sleeves on all conduit openings

## General


Configuration:	90
Exterior Finish:	A nominal .040 inch (40 mil) gray PVC coating
Grounding Lug:	Attached
Interior Finish:	A nominal .002 inch (2 mil) green urethane
Material:	FERROUS METAL

## Dimensions

Dimension A (Inches)	1.74
Dimension B (Inches)	1.81
Dimension C (Inches)	0.56
Ground Wire	14-4
Nominal Weight (Pounds)	0.4

## Technical / Specification Documents

Specification Guide (1995 Master)	AVAILABLE ON WEBSITE
Specification Guide (2004 Master)	AVAILABLE ON WEBSITE
Installer Certification and Tools	AVAILABLE ON WEBSITE
Chemical Resistance Charts	AVAILABLE ON WEBSITE
Performance Specifications	AVAILABLE ON WEBSITE

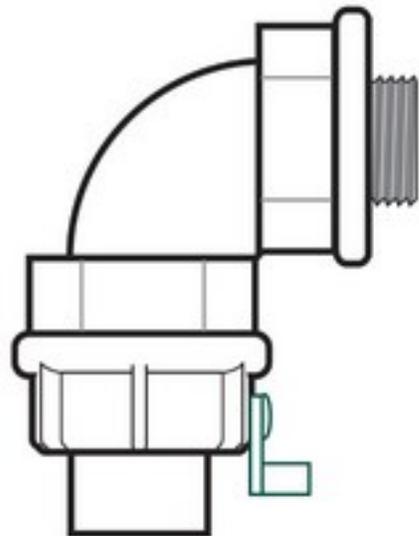

## Liquid Tight Connectors

Catalog Number: 4Q975LT

UPC: 736953018044



### Standards

---

UL 514B (Steel fittings only): E200413

---

UL 467 (Steel Fittings only): E217890

---