



## LV221 and LV230 Low Voltage Lighting Controller

### Easy to Use and Sylish Decora Control for miniZ Applications

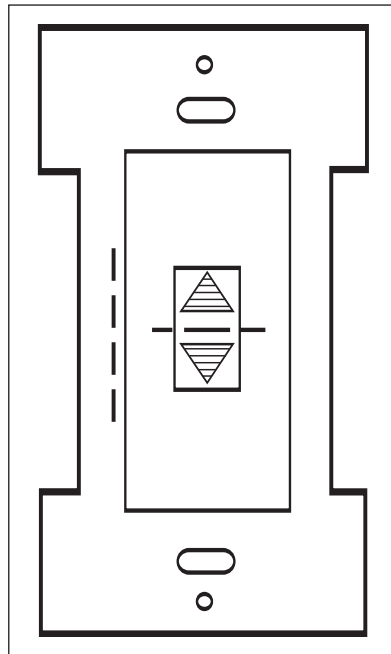

Cat. No. LV221

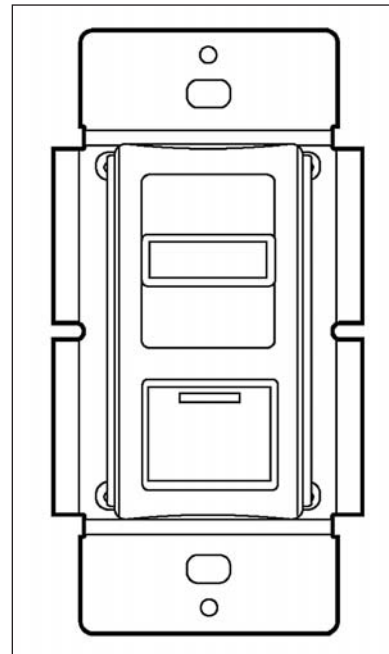

Cat. No. LV230

#### DESCRIPTION

The LV221 and LV230 lighting controllers are Decora-style devices for controlling dimmable luminaires connected to the miniZ Intelligent Daylight Management System. The LV221 and LV230 provide unique control stations with multi-function capabilities available in a rocker on/off with bright/dim capabilities (LV221) or an on/off button with raise/lower slider (LV230) configuration. The devices come in white with a matching wallplate.

#### OPERATION

Both controllers work in conjunction with the features of the miniZ Daylight Management System which offers daylight harvesting, occupancy sensor and time clock inputs.

#### LV221 functions:

- LARGE ROCKER turns lights ON and OFF in the preset dimmed mode

- CENTER ROCKER (push up arrow) raises light levels with press hold
- CENTER ROCKER (push down arrow) lowers light levels with press hold

#### LV230 functions:

- PUSH-ON turns on lights to daylight harvesting mode
- SLIDER up raises light levels
- SLIDER down lowers light levels
- PUSH-OFF turns off lights

#### FEATURES

- LV221 features rocker on/off with bright/dim capabilities
- LV230 features on/off button with raise/lower slider
- Designer Decora styling enhances any décor
- Can be used with stand-alone or networked miniZ system

#### LEVITON SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>


# Product Specifications

## LV221/LV230


SPECIFICATIONS: LV221	
<b>Electrical</b>	
<b>Input Voltage:</b> 24VDC	
<b>Input Current:</b> 19mA	
<b>Physical</b>	
<b>Size:</b> 4.135" x 2.38" x 1.59" (10.5cm x 6.1cm x 4.0cm)	
<b>Color:</b> White	
<b>Environmental</b>	
<b>Operating Temperature Range:</b> 0°C to +55°C	
<b>Storage Temperature Range:</b> -10°C to +70°C	
<b>Relative Humidity:</b> 20% to 90% non-condensing	
<b>Installation</b>	
Low Voltage Class 2 Wiring	
<b>Warranty</b>	
Limited 2-Year Warranty	

SPECIFICATIONS: LV230	
<b>Electrical</b>	
<b>Input Voltage:</b> 24VDC	
<b>Input Current:</b> 20mA	
<b>Physical</b>	
<b>Size:</b> 4.135" x 2.38" x 1.59" (10.5cm x 6.1cm x 4.0cm)	
<b>Color:</b> White	
<b>Environmental</b>	
<b>Operating Temperature Range:</b> 0°C to +55°C	
<b>Storage Temperature Range:</b> -10°C to +70°C	
<b>Relative Humidity:</b> 20% to 90% non-condensing	
<b>Installation</b>	
Low Voltage Class 2 Wiring	
<b>Warranty</b>	
Limited 2-Year Warranty	

## WIRING DIAGRAMS

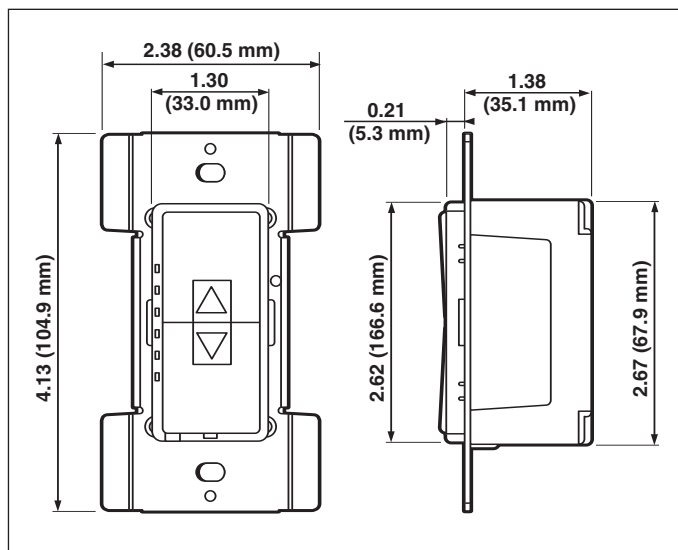

**Diagram 1**  
Cat. No. LV221

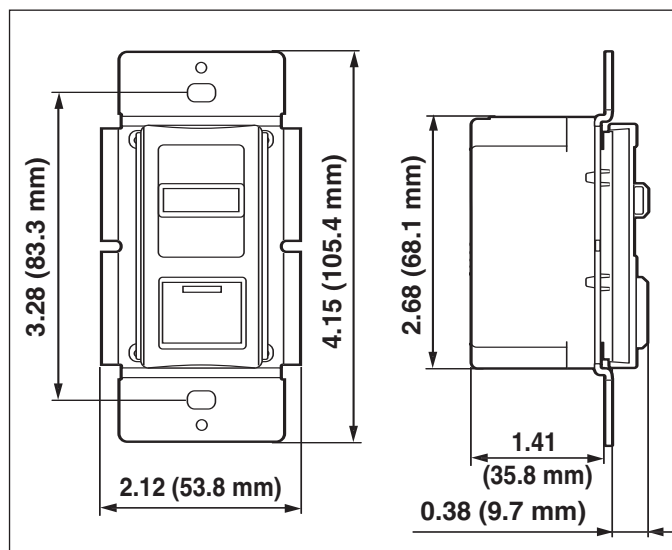

**Diagram 2**  
Cat. No. LV230

## ORDERING INFORMATION

Cat. No.	Description	Color
LV221-00W	Rocker On/Off with Bright/Dim for use with miniZ Intelligent Daylight Management System	White
LV2320-00W	On/Off Button with Raise/Lower Slider for use with MiniZ Intelligent Daylight Management System	White

Leviton Mfg. Co., Inc.  
P.O. Box 2210 • Tualatin, Oregon 97062 • Phone: (503) 404-5500 • Fax: (503) 404-5600

Visit our Website at: [www.lms.leviton.com](http://www.lms.leviton.com)

© 2006 Leviton Manufacturing Co., Inc. All rights reserved



G-7574/H6/nsk