



Color: Blue

UPC Code: 07847770542

Country Of Origin: Mexico

NEMA:
5-20R



16352-BU

Brand Features

Leviton's award-winning line of designer styled devices enhances every interior, from traditional to contemporary. The Decora offering includes switches, receptacles, lighting controls, home automation components, telephone devices, fan-speed controls and wallplates. All Decora devices are provided in a broad range of colors to match or contrast with any decor.

Item Description

Decora Plus Duplex Receptacle Outlet, Heavy-Duty Industrial Specification Grade, Smooth Face, 20 Amp, 125 Volt, Back or Side Wire, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - Blue

Technical Information

AC Horsepower Ratings

At Rated Voltage: 1 HP

Electrical Specifications

Amperage: 20 A

Current Limiting: Full Rated Current

Dielectric Voltage: Withstands 3000V per UL498

Grounding: Self-Grounding

Pole: 2

Temperature Rise: Max 30C temperature rise at full rated current

Voltage: 125 VAC

Wire: 3

Environmental Specifications

Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 60°C

Material Specifications

Body Material: PBT Polyester Blend

Clamp Nuts: Steel

Color: Blue

Face Material: PBT Polyester Blend

Ground Clips: Brass

Grounding Screw: #8 Hex Head, Triple-Drive Brass

Line Contacts: .030" Brass

Strap Material: Steel (Galvanized G60)

Terminal Screws: #8 Triple Drive Brass

Mechanical Specifications

Product ID: Ratings are permanently marked on device

Terminal Accom.: 14-10 AWG

Terminal ID: Brass-Hot, Green-Ground, Silver-Neutral

Termination: Back and Side Wire

Product Features

Brand: Decora Plus

Color: Blue

Device Type: Duplex Receptacle Outlet

Feature 4: Smooth Face

Grade: Heavy-Duty Industrial Specification Grade

Grounding: Self-Grounding

NEMA: 5-20R

Standards and Certifications

ANSI: C-73

NEMA: WD-1 & WD-6

Warranty: 10 Years

Patents*

CA2483480


US6743029

MX257790

US8684771

MX321216

*This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

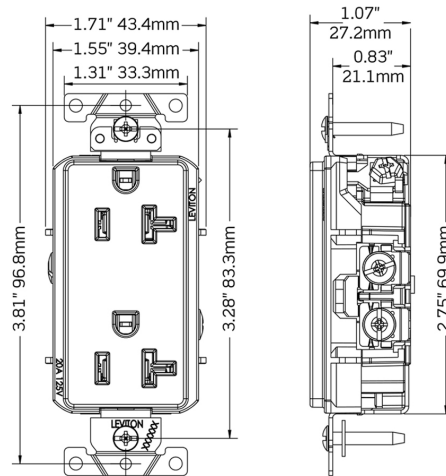

Drawing Applies to 15 & 20A Devices

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

