

29W81-B

Brand Features

Leviton's Industrial Grade Locking Devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of Locking Devices of unmatched flexibility and dependability.

Item Description

30 Amp, 120/208 Volt 3-Phase Y, NEMA L21-30R, 4P, 5W, Locking Connector, Industrial Grade, Grounding, Corrosion Resistant, Wetguard - BLACK

Technical Information

Electrical Specifications

Amperage: 30 A

Current Limiting: Full Rated Current

Dielectric Voltage: Withstands 2000V per UL498

Grounding: Grounding

Pole: 4

Temperature Rise: Max 30C after 250 cycles OL at 200 percent rated current

Voltage: 120/208 VAC

Wire: 5

Environmental Specifications

Environment: Wet

Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 60°C

Material Specifications

Assembly Screws: Stainless Steel 300

Blades/Contacts: Nickel-Plated Brass

Body Interior: Nylon

Body Material: EPTR Rubber

Bushing: Santoprene TPV

Compression Nut, Strain Relief: Nylon

Terminal Screws: Electroless Nickel-coated Brass

Wire Module: Nylon

Mechanical Specifications

Cord Grip Range (in): .625-1.125

Product ID: Ratings and NEMA I.D. permanently marked on device

Terminal Accom.: #12 to #8

Terminal ID: Brass-Hot, Green-Ground, Silver-Neutral

Product Features

Assembly Screws: Stainless Steel 300

Blades/Contacts: Nickel-Plated Brass

Body Material: EPTR Rubber

Brand: Wetguard

Color: Black

NEMA: L21-30R

Standards and Certifications: UL/CSA

Device Type: Locking Connector

Standards and Certifications

ANSI: C-73

CSA C22.2 No. 42: File LR-406

NEMA: WD-6

NOM: 057

UL: 498

Warranty: Lifetime Warranty




Color:  Black


UPC Code: 07847770862

Country Of Origin: United States


NEMA:
L21-30R



Dimensional Diagram

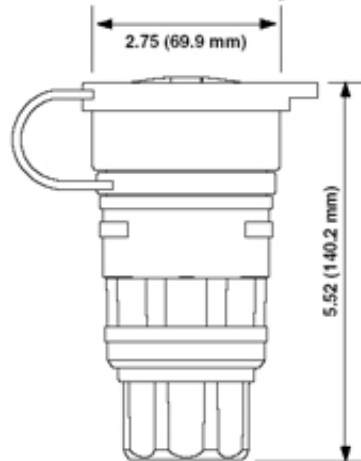

Wiring Diagram

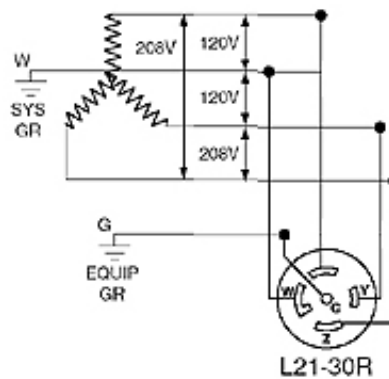

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

