



Color:  Ivory

UPC Code: 07847772626

Country Of Origin: China

NEMA:
5-15R



GFWT1-HGI

Brand Features

Peace of mind, all the time. The SmartlockPro Self-Test GFCI tests itself even if you forget. Designed to meet the latest UL standard for auto-monitoring (self-test) our complete line of self-test GFCIs periodically conduct an automatic internal test to confirm that it can respond to a ground fault. With the slimmest profile on the market, the device allows for fast and easy installation, while Leviton's patented reset lockout mechanism prevents reset of the GFCI if it is not wired or operating correctly. The SmartlockPro Self-Test GFCI is the smart choice in ground fault circuit interrupter protection.

Item Description

SmartlockPro GFCI Duplex Receptacle Outlet, Extra Heavy-Duty Hospital Grade, Wallplate Included, Weather and Tamper-Resistant, Power Indication, 15 Amp, 20 Amp Feed-Through, 125 Volt, Back or Side Wire, NEMA 5-15R, 2-Pole, 3-Wire, Self-Grounding - Ivory

Technical Information

AC Horsepower Ratings

At Rated Voltage: 1 HP

Electrical Specifications

Grounding: Self-Grounding

Pole: 2

Short Circuit Current Rating: 10kA

Wire: 3

Amperage: 15 A & 20 A Feed-Through

Voltage: 125 VAC

Environmental Specifications

Flammability: Rated V-0 per UL 94

Operating Temperature: -35C to +66C

Material Specifications

Body Material: Polycarbonate

Face Material: PBT

Ground Clips: Brass

Grounding Screw: Stainless Steel

Line Contacts: Brass

Shutter Mechanism: Delrin® Acetal

Strap Material: Nickel Plated Steel

Terminal Clamp: Brass

Terminal Screws: Stainless Steel

Mechanical Specifications

Product ID: Ratings are permanently marked on device

Terminal Accom.: 14-10 AWG solid or stranded

Terminal ID: Black-Hot, White-Neutral, Green-Ground

Termination: Back or Side Wire

Product Features

Color: Ivory

Grade: Extra Heavy-Duty Hospital Grade

NEMA: 5-15R

Brand: SmartlockPro

Function: GFCI

Device Type: Duplex Receptacle Outlet

Feature 2: Weather and Tamper-Resistant

Feature 3: Power Indication

Standards and Certifications

ANSI: C-73

Applicable Standards: UL 943, UL 498, CSA C22.2 No. 42 & 144, FedSpec W-C-596

Certification/Listing: UL, CSA, NOM-ANCE

NEMA: WD-1 & WD-6


Warranty

Product Warranty: 2-Year Limited

Patents*

CA2341552	US6788173
CA2358721	US6864766
CA2425810	US6944001
CA2427366	US7336458
CA2515035	US7355117
CA2621644	US7400479
CA2677283	US7463124
MX234458	US7697252
MX251584	US7737809
MX269232	US7764151
MX276411	US7820909
MX276626	US7868719
MX302458	US7907371
MX308495	US8004804
MX315596	US8054595
US6040967	US8130480
US6246558	US8242362
US6282070	US8547126
US6381112	US8587914
US6437953	US8599522
US6646838	US9053886
US6657834	US9077091

*This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

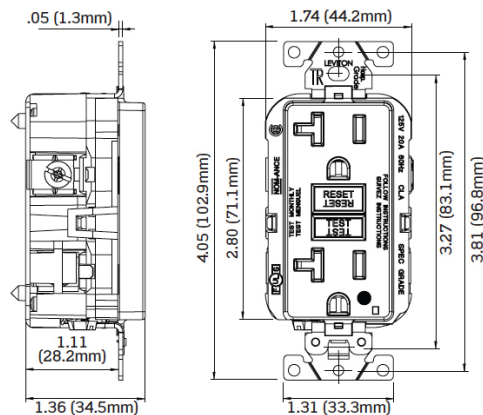

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Téléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

