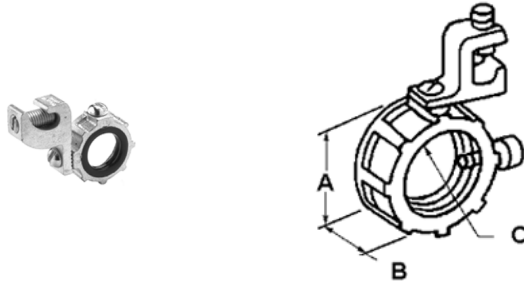


Malleable

Images

[Download Photo Image](#)[Download Dimensional Image](#)

Dimension A in Inches: 1-7/8

Dimension B in Inches: 3/4

Dimension C in Inches: 1-15/16

Application

Used with locknut to terminate service conduit to cabinet. Lug provided for bonding jumper to neutral busbar. Grounding lug: aluminum alloy 6061-T6. Plastic metaliner prevents damage to wire insulation. 1/2" thru 4" rated 150 degree C, 5" and 6" rated 105 degree C.

Product Information

Material: Malleable Iron

Finish: Zinc electro-plate. Grounding lug: Tin electro-plate

Certifications & Codes:

Federal Specification Number: A-A-50553

NEMA Standard: FB-1

UL File Number: E20412

UL Standard: UL-514B

UNSPSC: 39121312

Catalog ID: 384-14**UPC Number:** 781747038418**Description:** Bushing, Insulated, Grounding, Malleable Iron, Size 1 1/4 Inch, 14-4 Lug**Application:** Used with locknut to terminate service conduit to cabinet. Lug provided for bonding jumper to neutral busbar. Grounding lug: aluminum alloy 6061-T6. Plastic metaliner prevents damage to wire insulation. 1/2" thru 4" rated 150 degree C, 5" and 6" rated 105 degree C.**Trade Size:** 1 1/4"**Std Pkg Qty:** 200**Unit Qty:** 20