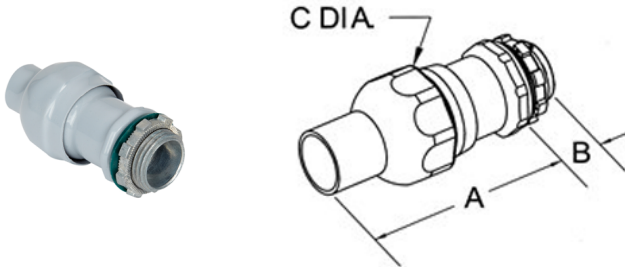


Polyolefin-Coated Mighty-Seal JMC/Teck Connectors

Images

[Download Photo Image](#)[Download Dimensional Image](#)

Dimension A in Inches: 2.25

Dimension B in Inches: .50

Dimension C in Inches: 1.32

Application

For connecting 3/8" jacketed metal clad cable and TECK cable to box, device or enclosure. Listed for direct burial. Cable ranges .50-.61. Max overall O.D. of jacket: .72. Nicks or cuts in polyolefin coating can be repaired by heating surface until coating flows. Environmentally safe. UV resistant. Salt spray resistance is greater than 2000 hrs. Patented.

Product Information

Material: Zinc alloy body with polyolefin coating

Finish: Polyolefin Coating

Certifications & Codes:

CSA File Number: C22.2 18.3-04

Federal Specification
Number: A-A-50552

NEMA Standard: FB-1

UL Standard: UL 514B

UNSPSC: 39121419

ETL File Number: ETL 100511099CRT-001

Catalog ID: 595-DC2C**UPC Number:** 78174714595

Description: Direct burial rated Mighty-Seal® jacketed MC cable connector. Polyolefin coated zinc body. Concrete tight, raintight and listed for direct burial.

Application: For connecting 3/8" jacketed metal clad cable and TECK cable to box, device or enclosure. Listed for direct burial. Cable ranges .50-.61. Max overall O.D. of jacket: .72. Nicks or cuts in polyolefin coating can be repaired by heating surface until coating flows. Environmentally safe. UV resistant. Salt spray resistance is greater than 2000 hrs. Patented.

Trade Size: 1/2"**Country of Manufacture:** US**Std Pkg Qty:** 40**Unit Qty:** 10