


Direct Burial - Lay-in Type - Copper

Images

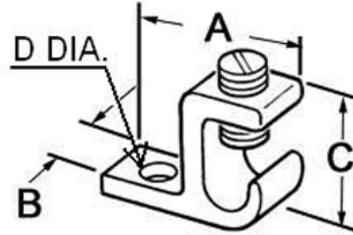

Application

Bridgeport Fittings Copper Lay-in Lugs are for use with all grounding applications. the mounting hole accomodates 1/4 inch bolt (not included). The CLI-20 is UL and CSA Listed for Direct Burial. The CLI-20 offers excellent corrosion resistance with stainless steel set screws and high strength copper alloy construction. Wire Range CU only #4-14 AWG.

Product Information

Material: High Strength Copper Alloy
Finish: Clear

Certifications & Codes:

CSA File Number:	LR-29601
Federal Specification Number:	A-A-50553
NEMA Standard:	FB-1
UL File Number:	E20412
UL Standard:	UL467
UNSPSC:	39121405

[Download Photo Image](#)

[Download Dimensional Image](#)

Dimension A in Inches: 1.15
Dimension B in Inches: .48
Dimension C in Inches: .83
Dimension D in Inches: .26

Catalog ID: CLI-20

UPC Number: 78174724020

Description: Bridgeport Fittings CLI-20 is a Copper Lay-in Lug that was designed for use with all grounding applications. The CLI-20 is CSA certified and UL listed for direct burial. For use with Copper Conductors #4-#14 AWG. Requires 1/4" mounting hardware.

Application: Bridgeport Fittings Copper Lay-in Lugs are for use with all grounding applications. the mounting hole accomodates 1/4 inch bolt (not included). The CLI-20 is UL and CSA Listed for Direct Burial. The CLI-20 offers excellent corrosion resistance with stainless steel set screws and high strength copper alloy construction. Wire Range CU only #4-14 AWG.

Trade Size: #4 - #14

Std Pkg Qty: 200

Unit Qty: 20