


Stainless Steel



Images

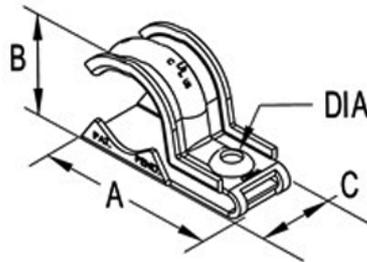

Application

The one piece clamp back and strap secures both cable and conduit. The UCSS-75100 secures 3/4" and 1" EMT, Rigid, IMC, PVC/Polyolefin Coated Rigid, PVC/Polyolefin Coated IMC, Metallic Liquid Tight, Nonmetallic Liquid Tight, FMC, and Schedule 40 and Schedule 80 PVC conduit, as well as .925" O to 1.32" O steel and aluminum AC/MC cable. Plenum Rated for use in Air Handling systems, per UL 2043. Patented.

Product Information

Material: Stainless Steel

Certifications & Codes:

Federal Specification Number:	A-A-50553
NEMA Standard:	FB-1
UL File Number:	E161206
UL Standard:	UL 2239
UNSPSC:	39121705

Catalog ID: UCSS-75100

UPC Number: 78174702943

Description: One piece clamp back and strap combination, 1 hole, Stainless Steel, 3/4" - 1" Trade Size. Patented.

Application: The one piece clamp back and strap secures both cable and conduit. The UCSS-75100 secures 3/4" and 1" EMT, Rigid, IMC, PVC/Polyolefin Coated Rigid, PVC/Polyolefin Coated IMC, Metallic Liquid Tight, Nonmetallic Liquid Tight, FMC, and Schedule 40 and Schedule 80 PVC conduit, as well as .925" O to 1.32" O steel and aluminum AC/MC cable. Plenum Rated for use in Air Handling systems, per UL 2043. Patented.

Trade Size: 3/4" - 1"

Std Pkg Qty: 250

Unit Qty: 50

[Download Photo Image](#)

[Download Dimensional Image](#)

Dimension A in Inches: 2.86
Dimension B in Inches: 1.85
Dimension C in Inches: .973
Dimension D in Inches: .265