



FFIH Series Floor Drop-In Heater


Volts	Watts	BTU	Weight	Catalog Number	<input checked="" type="checkbox"/>
120	375	1280	7.3/16	FFIH15A31*-KIT	<input type="checkbox"/>
120	750	2559	"	"	<input type="checkbox"/>
120	1125	3839	"	"	<input type="checkbox"/>
120	1500	5118	"	"	<input type="checkbox"/>
240/208	750/563	2559/1918	"	"	<input type="checkbox"/>
240/208	1500/1125	5118/3839	"	"	<input type="checkbox"/>

Factory wired at 240/208V for 1500/1125W

* Colour	<input checked="" type="checkbox"/>
Almond	<input type="checkbox"/>
White	<input type="checkbox"/>

Accessories (Field Installed)

Cat. No.	Description	<input checked="" type="checkbox"/>
FFIHAG	FFIH Grille Kit (Almond)	<input type="checkbox"/>
FFIHWG	FFIH Grille Kit (White)	<input type="checkbox"/>

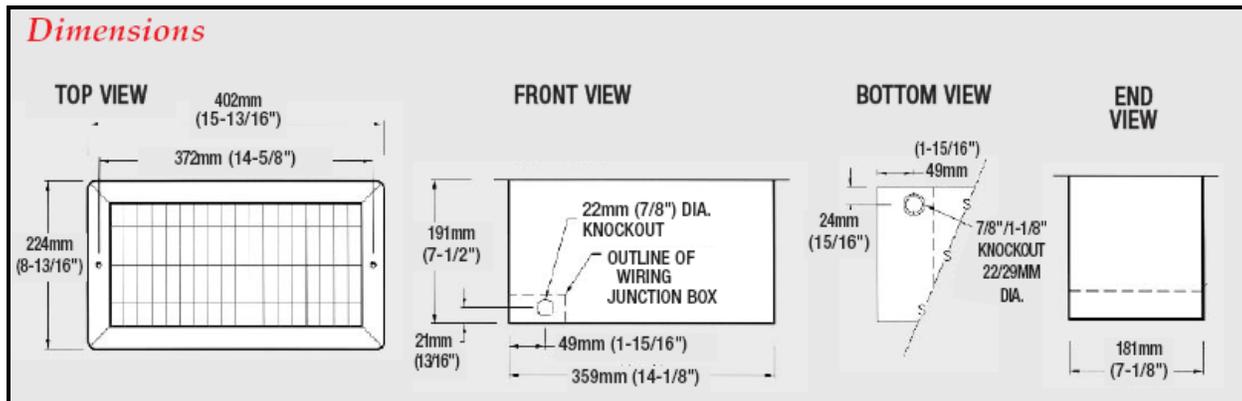

Specifications

VOLTAGE	120,240/208V
WATTAGE	Five outputs ranging from 375W to 1500W
COLOUR	Almond or White
AIRFLOW	80 CFM
FINISH	Specially formulated polyester powder coating process is applied to the front panel which resists fading and abrasion.
CONSTRUCTION	The housing is constructed of 18 gauge satin coat steel complete with knockouts to accommodate field wiring. The Louvered grille is constructed of 14 gauge steel with 9 gauge trim.
HEATING ELEMENT	A nickel chromium element is totally enclosed within a steel sheath and spiral steel fins are brazed to the element to Provide excellent heat transfer.
CONTROLS & WIRING	An external thermostat control (not included) is required to operate this unit. The unit is factory wired for 240/208V@ 1500/1125W operation and can be field wired to 120V@375W,750W,1125W or 1500W ; 240/208V @750/563W.
WARRANTY	One year warranty on complete unit.