




Plastic In-Use Covers Double-Gang or Single-Gang



- Complies with 2011 NEC Article 406.9 (B1)
- Heavy-duty polycarbonate construction
- Vertical hinge configuration
- Pre-adhered gasket
- 3 inserts for GFCI, duplex, toggle, or round receptacles
- Meets Cold Impact Testing requirements at -60°F (-51°C)

Model #	Flexi-Guard Inserts	Cord Diam.	Max. Cord Gauge	Depth	Color
A. WP1020C	WP101 & WP102	0.5"	(2) 14 or (1) 12 Gauge	2 ¼"	Clear
B. WP1020GC	WP101 & WP102	0.5"	(2) 14 or (1) 12 Gauge	2 ¼"	Gray
C. WP1020WC	WP101 & WP102	0.5"	(2) 14 or (1) 12 Gauge	2 ¼"	White
D. WP1030C	WP101 & WP102	0.5"	(2) 14 or (1) 12 Gauge	3 ¼"	Clear
E. WP1050	WP101 & WP102	0.8"	(2) 14 or (1) 10 Gauge	4 ¾"	Clear

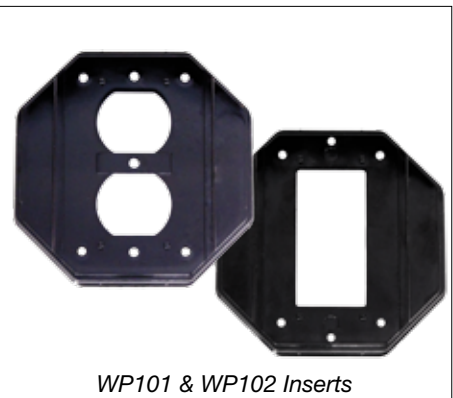

WP101 & WP102 Inserts

Note: Lockable hasp accepts up to .125" (3.175 mm) diameter shank

