

codes and standards

- UL listed to Standard 924
- NFPA 101 (Life Safety Code)
- NFPA 70 (National Electric Code) and OSHA Standards California Energy Commission
- UL listed for damp location

construction and finish

- Available in matte black housing with brushed aluminum face or white with a powder coat paint finish.
- All signs provided with shallow canopy for ceiling or end installations.
- Extra stencil faceplate is provided for converting single face signs to double face signs in the field with ease. All units have concealed directional chevron indicators (knockouts).

installation

- Universal mounting (wall, side, or ceiling).
- Canopy and mounting hardware provided.
- Universal knockouts on backplate allow for wall mounting directly to J-Box.

electronics

- AC Only:
Red = 2.48 Watts, Green = 2.22 Watts
Emergency:
Red = 3.08 Watts, Green = 3.08 Watts
- Surge protection is standard on all models.
- Charging System is complete with low voltage disconnect, AC lockout, and brownout protection.
- 120/277 VAC Selectable Input.

battery

- Maintenance free sealed nickel cadmium has estimated service life of 8 to 10 years.
- Operating temperature range of 20°F (-7°C) to 95°F (35°C).
- Provides 90 minutes of emergency illumination.

warranty

- Five full years on electronics and unit.


Commercial Exit Signs**55 Line**
Die Cast Aluminum LED
Contemporary**Specifier's Reference**

Project

Type

Model No.

Comments

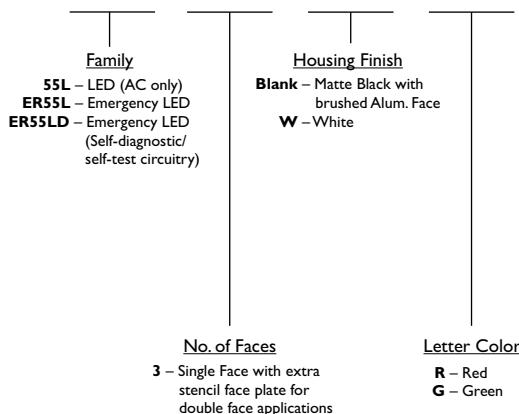Green Product Choice: ER55L3R**Accessories**

PVS2 – Polycarbonate Vandal Shield
WG4 – Wire Guard


Note:

For (8" Letters) New York City die cast aluminum exit signs, refer to specification sheet number CN-26300.



PHILIPS
CHLORIDE

dimensions

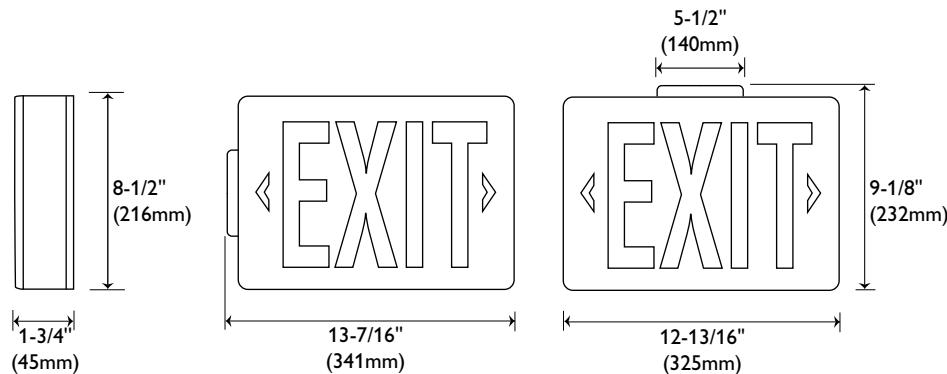

© 2014 Koninklijke Philips N.V. All rights reserved.
Specifications are subject to change without notice.
www.philips.com/luminaires

CE-11300 10/14 page 2 of 2

Philips Lighting
North America Corporation
200 Franklin Square Drive
Somerset, NJ 08873
Tel. 855-486-2216

Imported by: Philips Lighting
A division of Philips Electronics Ltd.
281 Hillmount Rd,
Markham, ON Canada L6C 2S3
Tel. 800-668-9008