

59414

14-16 PLASTIC SCREW ANCHOR


UPC: 085937594143

Country of Origin:

UNSPSC: 31162103

USA

Commodity: Wall anchors

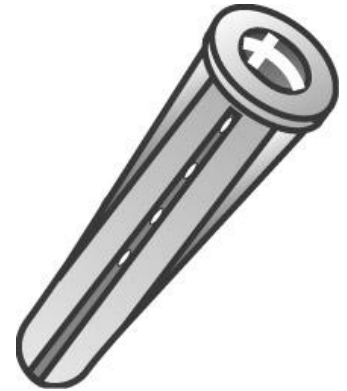

An injection-molded anchor with a flanged opening at the top end and a cone-shaped body that is cupped at the opposite end.

Product Attributes

Brand Name	Minerallac Company
Sub Brand	Cully
Type	Plastic Anchor
Application	The conical plastic anchor is a light-duty part that can be used in drywall, concrete, and hollow block or brick.
Size	#14 – #16
Length	1.500" IN
Minimum Embedment Depth	1.500" IN
Drill Size	5/16" IN
Material	Engineered Plastic
Tension Strength	In 4,000 PSI Concrete: 840 LB; in hollow brick: 840 LB; in solid red brick: 880 LB
Shear Strength	In 4,000 PSI Concrete: 575 LB; in hollow brick: 530 LB; in solid red brick: 500 LB

Item Status: Active

Standard Qty: 100

Minerallac Company

Tel: 800-927-3293

Fax: 800-824-8942

www.minerallac.com