

# Portable Utility Lights

42

## 4 Sources of Light Sources



LED-37



LED-37-2



LED-1



LED-2



FL-1



FL-2



QH-1



QH-2

### LED 37

- 30,000+ hour lamp life
- Safety glass front lens cover
- NEMA 4 rated enclosure
- Can be used with pedestal, cart, and tripod mounts only.
- Compliant with RoHS 2 Directive (2011/65/EU).

### LED 1 & 2

- Longest Lamp Life
- Lowest energy usage per lumens produced.
- 12 Watt LED bulbs (included)
- Shade remains Cool-to-the-Touch.

### Fluorescent

- Uses compact, low energy use
- Long life 55 Watt Fluorescent bulbs (included)
- Shade remains Cool-to-the-Touch.

### Quartz Halogen

- High light output
- Weatherproof aluminum die-cast light heads
- 500 Watt quartz bulbs (included).

## 6 Types of Bases and Mounts

### Pedestal Base

- 16 gauge round steel tube construction
- Height adjustable from 5'-6" to 8'-6" high
- 18" heavy duty steel base



PED

### Cart Base


- 16 gauge round steel tube construction
- Height adjustable from 5' to 8' high
- 10" diameter wheels



CRT

### Tripod Base

- 20 gauge round steel tube construction
- Height adjustable from 3' to 6'-6" high
- Base covers 46" diameter area



TRI

### Floor Base

- 12 gauge steel base
- Handle included
- Base covers 16" diameter area



FLR

### Clamp-On Mount

- Clamp secures light head to most surfaces up to 3"



CLP

### Magnet Mount

- 210 lb. magnetic strength
- 1/4" steel arm
- Extends 6" from mounting surface




MAG

## Light Selection Chart & Illumination Levels

| LIGHT SOURCE:                                                 | QUARTZ HALOGEN |        | FLUORESCENT |       | LED    |       | LED 37  |       |     |
|---------------------------------------------------------------|----------------|--------|-------------|-------|--------|-------|---------|-------|-----|
| # OF LIGHT HEADS                                              | 1              | 2      | 1           | 2     | 1      | 2     | 1       | 2     |     |
| MAX. WATTAGE                                                  | 500            | 1,000  | 55          | 110   | 12     | 24    | 37      | 74    |     |
| MAX. LUMENS                                                   | 11,000         | 22,000 | 3,000       | 6,000 | 960    | 1,920 | 2,373   | 4,746 |     |
| AVG. BULB LIFE (HRS.)                                         | 2,000          |        | 10,000      |       | 50,000 |       | >30,000 |       |     |
| WIRE GUARD INCLUDED                                           | Yes            |        | Yes         |       | Yes    |       | No      |       |     |
| BULB INCLUDED                                                 | Yes            |        | Yes         |       | Yes    |       | Yes     |       |     |
| LIGHT SOURCE ILLUMINATION LEVELS                              |                |        |             |       |        |       |         |       |     |
| Measured Footcandles & Distance from Light Source (open area) | 5' ft.         | 74.4   | 137.3       | 20.0  | 35.8   | 224.5 | 456.8   | 448.1 | 896 |
|                                                               | 10' ft.        | 36.1   | 65.9        | 8.7   | 14.8   | 121.4 | 258.8   | 299   | 598 |
|                                                               | 20' ft.        | 13.2   | 24.6        | 3.1   | 5.1    | 29.0  | 64.0    | 71    | 142 |
|                                                               | 30' ft.        | 6.6    | 12.3        | 1.7   | 2.5    | 14.2  | 31.4    | 34    | 68  |

## Task Lighting...

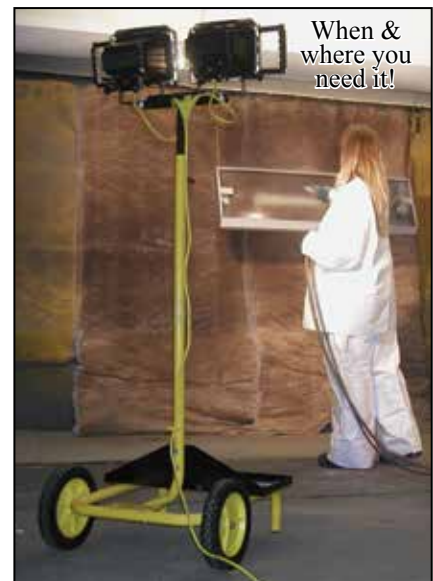

When & where you need it!

### ATTENTION

Fluorescent and HID lamps contain mercury. Dispose of these lamps according to local, state, or federal laws. For further information on local, state, or other requirements for disposal of mercury-containing lamps, see <http://www.lamprecycle.com>.

# Portable Utility Lights

43

## Incandescent, Fluorescent, and LED Series

## Features

- Chip resistant safety yellow & black powder coating finish for high visibility and durability
- 15' long 18/3 SJT, 120V cordset with NEMA 15-5 grounded plug
- Shade will swivel 300° horizontally and 210° vertically
- On/Off switch, bulb, and wire guard included on each light head
- Made in U.S.A. with domestic and foreign components

### Lamp Specifications - LED & FL

- Aluminum shade is 9 3/8" long with 7 3/4" diameter opening and will swivel 300° horizontally and 210° vertically
- LED 1 & 2 models are designed with an acrylic lens cover over each of the 12 single Watt LED emitters. Constructed with narrow 15° angle beam generating 960 lumens per bulb.
- FL models include a 55W spiral fluorescent bulb and internal reflector for maximum illumination at shorter distances.
- ETL C/US Listed for indoor & semi-protected outdoor use

### Lamp Specifications - LED-37

- Lexan housing
- Safety glass front lens cover
- NEMA 4 rated enclosure
- Can be used with dock arm, pedestal, cart, and tripod bases only.
- Push button on-off switch
- 15' power cord
- Compliant with RoHS 2 Directive (2011/65/EU), that of which includes the application exemptions outlined in Annex III of the directive.



### Lamp Specifications - QH

- QH models include a 500 Watt quartz halogen bulb and weatherproof die cast aluminum light head with impact resistant lens
- Each shade size is 9" wide x 7 1/4" high x 9 3/4" deep
- ETL C/US listed for indoor & semi-protected outdoor use



## Standard Models


| MFG CATALOG NUMBER | MFG MODEL NUMBER | TYPE         | DESCRIPTION    | TOTAL MAX WATTS | # OF LIGHT HEADS | WT. (LBS) |
|--------------------|------------------|--------------|----------------|-----------------|------------------|-----------|
| 04885402           | LED-37-1*        | LIGHTHEAD    | LED            | 37              | 1                | 6         |
| 04885302           | LED-37-2*        |              |                | 74              | 2                | 10        |
| 04873602           | LED-1            |              | LED            | 12              | 1                | 6         |
| 04873702           | LED-2            |              |                | 24              | 2                | 9         |
| 04803002           | FL-1             |              | FLUORESCENT    | 55              | 1                | 5         |
| 04803402           | FL-2             |              |                | 110             | 2                | 8         |
| 04802902           | QH-1             |              | QUARTZ HALOGEN | 500             | 1                | 5         |
| 04803302           | QH-2             |              |                | 1000            | 2                | 10        |
| 04802702           | PED              | MOUNT / BASE | PEDESTAL       | ----            | ----             | 31        |
| 04802802           | CRT              |              | CART           | ----            | ----             | 27        |
| 04802302           | TRI              |              | TRIPOD         | ----            | ----             | 9         |
| 04802602           | FLR              |              | FLOOR          | ----            | ----             | 4         |
| 04802402           | CLP              |              | CLAMP          | ----            | ----             | 2         |
| 04802502           | MAG              |              | MAGNET         | ----            | ----             | 3         |

\*Cannot be used with clamp-on mount

## Individual Portable Light Components - Replacement Bulbs

| MFG CATALOG NUMBER | MFG MODEL NUMBER | DESCRIPTION      | WATTS | USED WITH           | WT. (LBS) |
|--------------------|------------------|------------------|-------|---------------------|-----------|
| 04850502           | SSE-55           | Fluorescent Bulb | 55    | ALL FL Light heads  | 1         |
| 04708502           | LED-12           | LED Bulb         | 12    | ALL LED Light heads | 1         |

## LED Light Head with Mount

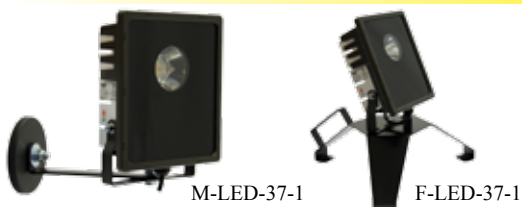

| MFG CATALOG NUMBER | MFG MODEL NUMBER | DESCRIPTION           | WATTS | WT. (LBS) |
|--------------------|------------------|-----------------------|-------|-----------|
| 04888402           | M-LED-37-1       | LED with Magnet Mount | 37    | 8         |
| 04888602           | F-LED-37-1       | LED with Floor Mount  | 37    | 9         |