



# Low Profile. High Performance.



The versatile, low-profile LED garage luminaire



Visit [rabweb.com](http://rabweb.com)  
to see which models  
are DLC listed.

**RAB**<sup>®</sup>  
LIGHTING  
RABWEB.COM • 888-722-1000

# GARAGE LUMINAIRES

- Low-Profile Design Ideal for Parking Garages
- 26W Replaces up to 100W MH Luminaires  
52W Replaces 175W MH Luminaires  
78W Replaces 250W MH Luminaires
- 100,000-Hour LED Lifespan
- Up to 25% Reduction in Fixture Count
- Hanging Plate with Hooks Included for Easy Wiring
- 5-Year Warranty

**IP65**  
RATING

## Specifications

**UL Listing:** Ceiling Mount - Suitable for wet locations with covered ceiling.  
Pendant Mount - Suitable for wet locations.

**LEDs:** Multi-chip, high-output, long-life LEDs

**Lifespan:** 100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

**Drivers:** Constant Current, 720mA, Class 2 with 6 kV surge protection, 100-277VAC, 50/60 Hz

Nominal Watts	26W	52W	78W
Input Watts @ 120VAC	30	59	88
Output Lumens*	2812	4975	7053
Lumens per Watt*	94.0	84.5	79.9
Color Accuracy (CRI)*	69	68	68
Correlated Color Temp. (Nominal CCT)*	5000K	5000K	5000K

**Cold Weather Starting:** Minimum starting temperature is -40°C (-40°F)

**Ambient Temperature:** Suitable for use in 40°C (104°F) ambient temperatures

**Thermal Management:** Superior heat sinking with integrated Air-Flow fins

**Housing:** Precision die-cast aluminum housing and door frame

**Mounting:** Easy hanging plate with hooks for ceiling mount

**Lens:** Prismatic polycarbonate lens

**Reflector:** Semi-specular anodized aluminum with ultra-white, 97% reflective optics

**Gaskets:** High-temperature silicone

**Finish:** Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contain no VOC or toxic heavy metals.

**Color Stability:** RAB LED performance exceeds industry standards for chromatic stability

**Color Uniformity:** RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2011.

**Green Technology:** Mercury and UV free, and RoHS compliant. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

**IESNA LM-79 & LM-80 Testing:** RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

**California Title 24:** GLED26/D10 with 10V dimming driver complies with 2013 California Title 24 building and electrical codes as a non-residential indoor fixture when used with the RAB Stealth Dimmer. Use catalog code STLDIM10 to order a Stealth Dimmer module.

\* Values shown for cool temperature. Visit [rabweb.com](http://rabweb.com) for neutral and warm.

## Ordering Information

Product Family

Wattage

Color Temperature

Finish

Options






**GLED** Ceiling Mount  
**GPLED** Pendant Mount

**26** 26W  
**52** 52W  
**78** 78W

**Blank** 5000K  
**N** 4000K  
**Y** 3000K

**Blank** Bronze  
**W** White

**/D10** 10V Dimming Driver


## Photometrics

### GLED26/GPLED26

(Cool Light - 5000K)

@ 10' Mounting Ht.

Photometric Report #ITL81203




### GLED52/GPLED52

(Cool Light - 5000K)

@ 10' Mounting Ht.

Photometric Report #ITL79959




### GLED78/GPLED78

(Cool Light - 5000K)

@ 10' Mounting Ht.


Photometric Report #ITL79955



Multiples of Mounting Height • Values Shown in Footcandles

## Dimensions & Weight

**Ceiling Mount:** 18.2 lbs.

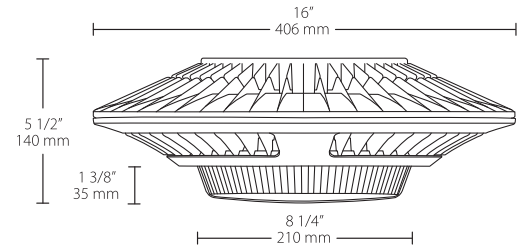

**Pendant Mount (Pendant by others):** 18.2 lbs.

