


PANDUIT PART #	RECOMMENDED FASTENER	'A'	'B'	'C'	'D'	'E'	'F'	'G'	Ø 'H'	Ø 'I'	USE WITH CABLE TIE CROSS SECTIONS	WEIGHT 100 pcs lbs (g)
TM2S8-C76	#8 (M4) SCREW	.630 [16.0]	.425 [10.8]	.275 [7.0]	.215 [5.5]	.060 [1.5]	.155 [3.9]	.105 [2.7]	.325 [8.3]	.175 [4.4]	MINIATURE INTERMEDIATE STANDARD	.16 (73)
TM3S8-C76		.855 [21.7]	.610 [15.5]	.375 [9.5]	.320 [8.1]	.089 [2.3]	.205 [5.2]	.110 [2.8]	.385 [9.8]	.216 [5.5]	STANDARD LIGHT HEAVY	.54 (245)
TM3S10-C76	#10 (M5) SCREW											.52 (236)

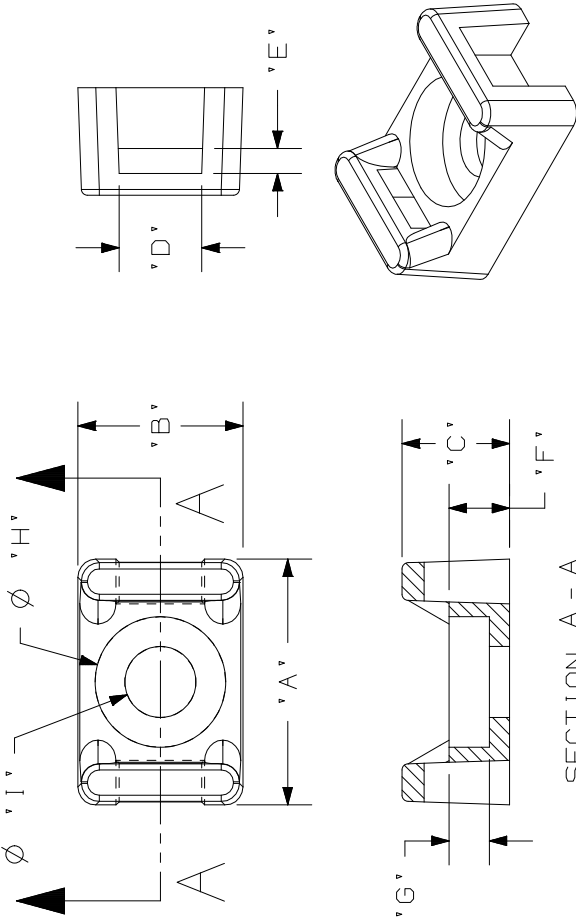

NOTES:

1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
2. COUNTERBORE HOLE TO PROVIDE LESS OF AN OBSTRUCTION TO THE BUNDLE.
3. UNIQUE CRADLE DESIGN PROVIDES MAXIMUM STABILITY AND RIGIDITY TO THE WIRE BUNDLE.
4. TEFZEL OFFERS A RESISTANCE TO ENVIRONMENTAL STRESSES SUCH AS CHEMICAL ATTACK, GAMMA RADIATION, ULTRAVIOLET RADIATION AND EXTREME TEMPERATURES.
5. TEFZEL HAS A UL FLAMMABILITY RATING OF UL94V-0.

PART NUMBER	TM* S* -C76	PACKAGING SPEC	N/A
PRODUCT SPEC	N/A	WORK INSTRUCTION	N/A
INSPECTION INSTRUCTION NUMBER	N/A	FMEA & CONTROL PLAN NUMBER	N/A
TITLE	TM2S8-C76, TM3S8-C76, & TM3S10-C76 TIE MOUNT		

ITEM REVISION NAME				CUSTOMER DRAWING			
W10001CR/06				PANDUIT			
DATASET FILE NAME				W10001CR_DC/06A			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)				MATERIAL: TEFZEL FLUOROPOLYMER COLOR-76/AQUA BLUE REG. T.M. OF CHEMOURS CO.			
.X ± .1 [2.5]				DRAWING NUMBER: SS-27262			
.XXX ± .010 [.25]				SHT 1 OF 1			
.XX ± .02 [.5]				SIZE A			
THIRD ANGLE PROJECTION							
DRAWN BY	DATE	CHK	SCALE	HVP	NONE		
BSH	5/19/00						
ECN	DESCRIPTION	CHK	APR	BY	DATE	REV	
013720/00	ADDED CUSTOMER TO DRAWING TITLE.	DJSL	MPH	BWG	5.28.25	06A	
GAECN04681	REVISED FROM DUPONT CO. TO CHEMOURS CO. PN THAT ADDED "C" TO C76 FROM PN COLUMN. PN, TM3S10-C76 WITH Ø "I" SHOULD BE .216 [5.5], NOT .193 [4.9]. TOLERANCE, .010 [2.5] WAS .020 [5.1].	JHAC	ANRO	RVU	10/11/18	5	
SS-27262	UPDATED DIMENSION 'H'. SEE ECN FOR DETAILS.			ERW	9/10/08	4	