


**96234**

UPC: 08593796234  
 UNSPSC: 31201605  
 Standard Qty: 1  
 Master Carton Qty: 50  
 Country of Origin: USA

Lectra-Stop™ Single Gang, 1ct

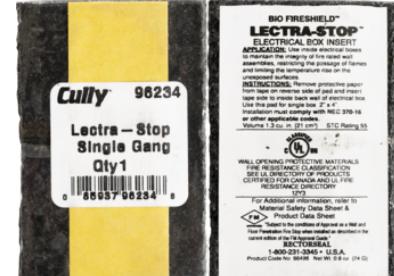

## Product Attributes

Brand Name	Minerallac
Sub Brand	Cully
Work Life	2 hour rating
Type	Fire Shield
Special Features	Highly Intumescent Material
Application	Adheres to the inside back wall of an electrical box.
Color	White
Size	1-13/16" x 2-13/16" x 1/4"
Container	Plastic
Sub Brand	Cully
Type	Electrical Box Fire-rated Insert
Description	Is a single component fire rated insert for use with electrical boxes. It is inserted on the inside back wall of an electrical box, and is a highly intumescent firestop material. When exposed to fire, the box guard expand forming a char that will seal off the opening and prevent the spread of flames and limit the temperature rise on the unexposed surfaces.
Application	Easy to install by hand, use guard boxes on the inside back panel of metallic electrical boxes to maintain the integrity of fire rated wall assemblies restricting the passage of flames and limiting the temperature rise on the unexposed surfaces. When used as directed, the horizontal separation between outlet boxes on opposite sides of the wall may be less than 24 inches.
Characteristics/ Features	East to install, cost effective, highly intumescent, adheres to back of electrical box, non-conductive, dielectric breakdown voltage 22V/mil (ASTM D149), STC rating 53
Size	1-13/16" x 2-13/16" x 1/4" (Single Gang)

## Compliance Information

Buy America Act Compliant: No  
 Buy American Act Compliant: No  
 RoHS Compliant: No

UL Compliant:

UL Code:

## Proposition 65

This product is in compliance with Prop65; it is not known to contain any chemicals associated with this regulation.


## Minerallac Company

Tel: 800-927-3293  
 Fax: 800-824-8942  
[www.minerallac.com](http://www.minerallac.com)

## 96234

UPC: 08593796234  
 UNSPSC: 31201605  
 Standard Qty: 1  
 Master Carton Qty: 50  
 Country of Origin: USA

Lectra-Stop™ Single Gang, 1ct

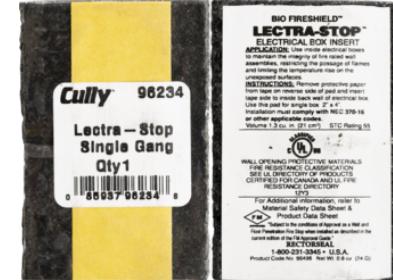

### Characteristics/ Features

East to install, cost effective, highly intumescent, adheres to back of electrical box, non-conductive, dielectric breakdown voltage 22V/mil (ASTM D149), STC rating 53

**WARRANTY DISCLAIMER** The information, data and recommendations contained herein may not be all inclusive or specific to your situation, and should only be used as a guide. The information is furnished upon the condition that the person receiving it shall make his/her own determination of the suitability of the product for his/her particular use and on condition that they assume the risk of the use thereof.

With respect to this publication and the product related thereto, except otherwise expressly provided by Manufacturer in writing, MANUFACTURER MAKES NO EXPRESS OR IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER EXPRESS OR IMPLIED WARRANTY.

**Remedy/Liability Limits** The exclusive remedy for losses or damages resulting from this publication or the related product (including claims based on contract, negligence, strict liability or other legal theories) shall be limited to, at Manufacturer's sole election, one of the following: 1. Refund of purchase price paid by buyer or user for product bought, or 2. Replacement of amount of product used.

Manufacturer shall not be liable for losses or damages resulting from use of this publication or handling or use of this product, IN NO CASE SHALL MANUFACTURER BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES OR LOSSES, INCLUDING WITHOUT LIMIT, HEALTH RELATED DAMAGES OR INJURIES, OR LOST PROFITS.

The terms of this Warranty Disclaimer and Remedy/Liability Limits cannot be varied by any written or verbal statements or agreements. No employee or sales agent of Manufacturer or the seller is authorized to vary or exceed the terms of this Warranty Disclaimer or Limitation of Remedies in any manner.