


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

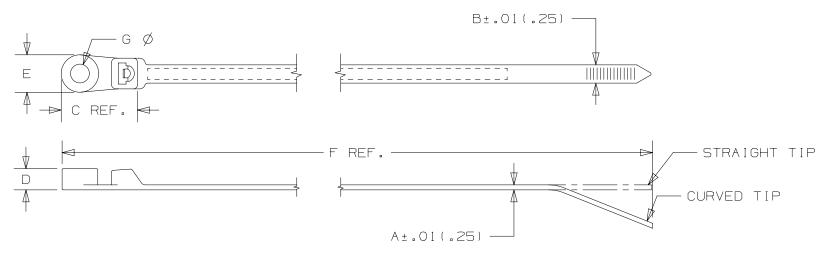

DANIBULT V	BUNDL	E DIA.	Α	В	С	D	E	F	G Ø		00000		WEIGHT	
PANDUIT X PART NO.	MIN (mm)	MAX in (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	MIN. LOOP lbs TENSILE (N)	CROSS- SECTION	TIP STYLE	lbs/100pcs (g)	RECOMMENDED FASTENER
SC8-50-S10	.12 (3.0)	1.85 (47)	.051 (1.3)	.190 (4.8)	.811 (20.6)	.213 (5.4)	.335 (8.5)	7.87 (200)	.205 (5.2)	50 (222)	STANDARD	CURVED	.367 (166)	#10 (M5) SCREW
SC15-120-S25	.28 (7.0)	3.86 (98)	.071 (1.8)	.30 (7.6)	.929 (23.6)	.276 (7.0)	.496 (12.6)	14.96 (380)	.224 (5.7)	120 (534)	LIGHT HEAVY	STRAIGHT	1.371 (622)	#12 (M5) SCREW

* NOTE: SEE WWW.PANDUIT.COM FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, PART COLOR AND ANY THIRD PARTY RECOGNITION OR COMPLIANCE.

								TITLE
A								STRONGHOLD CLAMP TIE
								CUSTOMER DRAWING
								O0092FB0/02 DATASET FILE NAME O0003FB0 DC/03A
								00092FB0_DC/02A
	02A	6/19/2025	PHSE	JADE	DJSL	CORRECTED MAX. BNDL. DIA. TO 3.86 ADDED COMP. SCREW SIZE	016101	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
	01A	05/21/2021	JBN	MRJS	JADE	CORRECTED MAX. BUNDLE DIA. TO 1.85/47 WAS 1.97/50	101539	.x ±xxx ± .020(.51) NYLON 6.6
JA/16	00	3/9/17	ACC	JSWA	JADE	DRAWING RELEASED	012502	THIRD ANGLE PROJECTION 00092FB0_DC
001010	REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY DATE CHK SCALE ACC 2-27-17 JSWA NONE SHT 1 OF 1