


# 8911DPSO13V06

Starter, Definite Purpose, nonreversing, 20A,  
3 pole, 3 phase, 480 VAC coil, melting alloy  
overload, open style

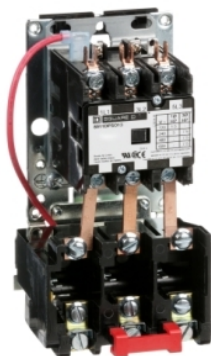

## Main

Product	Definite Purpose Starter
Ampere Rating	20 A
Horsepower Rating	3 Hp 230 V AC, 1 phase 7.5 Hp 230 V AC, 3 phase 1.5 Hp 115 V AC, 1 phase 7.5 Hp 460 V AC, 3 phase 7.5 hp 575 V AC, 3 phase
Maximum Voltage Rating	600 V AC
Control Circuit Voltage	440 V AC 50 Hz 480 V AC 60 Hz
Phase	3 phase

## Complementary

Enclosure Rating	Not rated (open device)
Locked Rotor Amperes	120 A 230 V AC 100 A 460 V AC 80 A 575 V AC
Number of Poles	3P
Range	DPS
Overload Type	Melting alloy
Number of Thermal Units	3

## Ordering and shipping details

Category	21381 - 8911 DP
Discount Schedule	CP1
GTIN	00785901025139
Nbr. of units in pkg.	1
Package weight(Lbs)	2.27 lb(US) (1.03 kg)
Returnability	Yes
Country of origin	CN

## Packing Units

Package 1 Height	4.70 in (11.938 cm)
Package 1 width	4.70 in (11.938 cm)
Package 1 Length	7.70 in (19.558 cm)

## Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>

## Contractual warranty

Warranty	18 months
----------	-----------