


Product data sheet

Characteristics

8911DPSO33V09

Starter, Definite Purpose, nonreversing, 30A, 3 pole, 3 phase, 208 to 240 VAC coil, melting alloy overload, open style

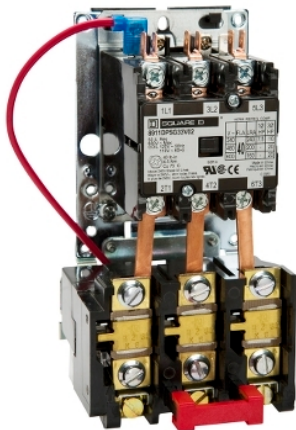

Main

Product	Definite Purpose Starter
Ampere Rating	30 A
Horsepower Rating	2 Hp 115 V AC, 1 phase 5 Hp 230 V AC, 1 phase 10 Hp 230 V AC, 3 phase 15 Hp 460 V AC, 3 phase 20 hp 575 V AC, 3 phase
Maximum Voltage Rating	600 V AC
Control Circuit Voltage	220 V AC 50 Hz 208...240 V AC 60 Hz
Phase	3 phase

Complementary

Enclosure Rating	Not rated (open device)
Locked Rotor Amperes	180 A 230 V AC 150 A 460 V AC 120 A 575 V AC
Number of Poles	3P
Range	DPS
Overload Type	Melting alloy
Number of Thermal Units	3

Ordering and shipping details

Category	21381 - 8911 DP
Discount Schedule	CP1
GTIN	00785901748939
Nbr. of units in pkg.	1
Package weight(Lbs)	2.3 lb(US) (1.04 kg)
Returnability	Yes
Country of origin	CN

Packing Units

Package 1 Height	5.00 in (12.700 cm)
Package 1 width	4.70 in (11.938 cm)
Package 1 Length	7.90 in (20.066 cm)

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------