


# 8911DPSO43V09

Starter, Definite Purpose, nonreversing, 40A,  
3 pole, 3 phase, 208 to 240 VAC coil, melting  
alloy overload, open style

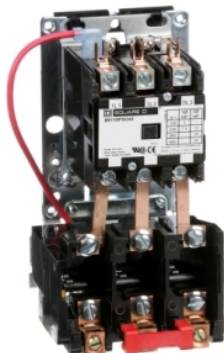

## Main

Product	Definite Purpose Starter
Ampere Rating	40 A
Horsepower Rating	3 Hp 115 V AC, 1 phase 10 Hp 230 V AC, 3 phase 7.5 Hp 230 V AC, 1 phase 20 Hp 460 V AC, 3 phase 25 hp 575 V AC, 3 phase
Maximum Voltage Rating	600 V AC
Control Circuit Voltage	220 V AC 50 Hz 208...240 V AC 60 Hz
Phase	3 phase

## Complementary

Enclosure Rating	Not rated (open device)
Locked Rotor Amperes	240 A 230 V AC 200 A 460 V AC 160 A 575 V AC
Number of Poles	3P
Range	DPS
Overload Type	Melting alloy
Number of Thermal Units	3

## Ordering and shipping details

Category	21381 - 8911 DP
Discount Schedule	CP1
GTIN	00785901025184
Nbr. of units in pkg.	1
Package weight(Lbs)	2.32 lb(US) (1.052 kg)
Returnability	Yes
Country of origin	CN

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	4.80 in (12.192 cm)
Package 1 width	4.80 in (12.192 cm)
Package 1 Length	7.90 in (20.066 cm)

## Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>

Contractual warranty

Warranty	18 months
----------	-----------