




Wiremold
2000 Pressure-Type Wire Connectors
Part No. W30/W30G

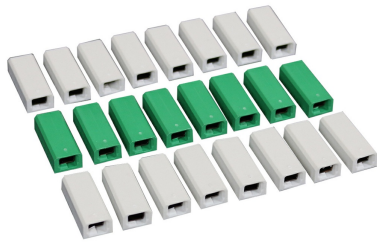

W30 - For common connection of two, three or four No. 12 or No. 14 solid copper conductors. Packed 24 pieces per carton (16 W30 and 8 W30G). W30G - For connection of equipment grounding of 2, 3, or 4 solid conductors No. 14 or No. 12 AWG. 300V maximum. 20A 105 degrees C maximum. NOTE: Not for use with aluminum conductors.

Features & Benefits

W30 - For common connection of two, three or four No. 12 or No. 14 solid copper conductors.

Packed 24 pieces per carton (16 W30 and 8 W30G). W30G - For connection of equipment grounding of 2, 3, or 4 solid conductors No. 14 or No. 12 AWG. 300V maximum. 20A 105 degrees C maximum.

NOTE: Not for use with aluminum conductors.

Specifications

General Info

Product Line	Wiremold	UPC Number	786776130676
Country Of Origin	United States	Product Series	2000 Series
Application Sector	Commercial, Education, Entertainment, Healthcare, Hospitality, Retail	Standard	cULus Listed Base & Blank Cover: File E4376 Guide RJBT. Multioutlet Assemblies: File E15191 Guide PVGT. Fittings: File E41751 Guide RJPR. Base & Blank Cover& Plugmold Series w/Snapcoil Harness: Meets Article 386 of NEC. Meets Section 12-3032 of CEC. Plugmold Wired Sections: Meets Article 380 of NEC. Meets Section 12-3032 of CEC.

Warranty Type	1-Year from Installation or 2-Years from Day of Sale	Type	Accessories
Dimensions			
Product Weight US	0.01 lb		
Listing Agencies / 3rd Party Agencies			
cULus ListingNumber	E13382	cULus Listed	Yes
Trade Programs			
USMCA	Yes		
Additional Information			
RoHS Compliant	Yes		
Technical Information			
Amperage	20 A	Indoor/Outdoor	Indoor
Voltage	300.0 V	Environmental Conditions	Dry interior locations