


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

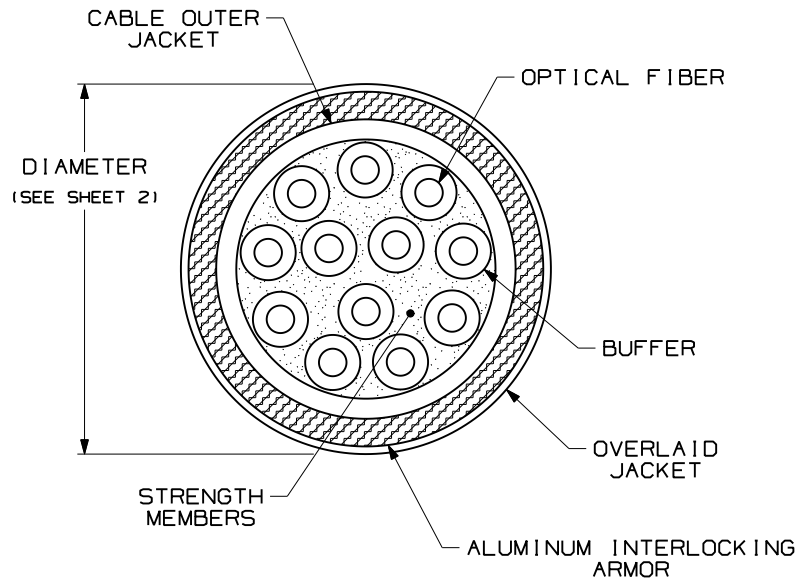


TECHNICAL SPECIFICATIONS			
MAXIMUM LOSS		SINGLEMODE MAXIMUM LOSS	
3.5dB/KM @ 850nm 1.5dB/KM @ 1300nm		.75dB/KM @ 1310nm .75dB/KM @ 1500nm	
TENSILE LOAD - OFCR		TENSILE LOAD - OFCR-LS/OFCP	
INSTALLATION	LONG TERM	INSTALLATION	LONG TERM
660 N (150 lbf)	165 N (37 lbf)	440 N (100 lbf)	110 N (24 lbf)
OPERATION		OFCR-LS/OFCP	
INSTALLATION		OFCR	
STORAGE		OFCR-LS/OFCP	
-20°C TO +50°C (-4°F TO +122°F)		-40°C TO +65°C (-40°F TO +149°F)	
0°C TO +50°C (+32°F TO +122°F)			

NOTES:


1. DIAMETER DIMENSION, SHOWN FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS () ARE ENGLISH.
3. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
02	10-26-09	EFK		RELEASED TO PRODUCTION	02055-97				

OPTI-CORE 12 FIBER INTERLOCKING ARMORED DISTRIBUTION CABLE
CUSTOMER DRAWING



PANDUIT™
CORP.
TINLEY PARK, ILL 60477



THIRD ANGLE
PROJECTION

ALL DIMENSIONS ARE GIVEN IN INCHES,
UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) (.XXX) ±0.3 (.010)
(.XX) ±0.8 (.03) ANGLES

DRAWING FILENAME
M02055BW_DC_12/01A

SCALE
NONE

PART NO. FSP**12Y
FOP**12Y

DRAWING NO.
02055-97
SHEET 1 OF 2

SIZE
A

DRAWN BY: MC

DATE: 06-03-05

CHK'D: WMA

REVIEW DRAWING NUMBERS

