

# QuickPort® Round Floor Jack Inserts & Assemblies

#### **APPLICATION**

Rugged and fully field-configurable, this device provides point-of-use connectivity for a broad range of applications where convenience or building requirements dictate the use of a floor-mounted communications outlet. Each floor plate is made of .06" thick solid brass to hold up under heavy furniture or foot traffic. When not in use, a flush-fitting brass screw cap keeps internal components free from dirt and dust.

The two individual ports are configured easily with any combination of QuickPort Snap-in Modules. QuickPort floor jacks will fit standard metal boxes 3" x 2", 3" x 2 1/8" and larger.



#### **SPECIFICATION**

The floor jack assembly shall be a field configurable NEMA-style housing that mounts flush in standard single gang NEMA boxes. It shall provide 2 ports which are field configurable with a variety of UTP & A/V QuickPort snap-in modules. Shall be constructed of high-impact, fire-retardant plastic rated UL 94V-0, and be UL Listed, CSA Certified, and compliant with FCC Part 68 and TIA/EIA-568-B specifications. Floor plate and screw cap finish shall be satin brass. Inserts shall be ivory in color.

#### **FEATURES**

- · Satin finish on brass floor plate & screw cap
- Flush-fitting brass screw cap keeps internal components free from dirt and dust when not in use
- · Accepts all UTP & A/V QuickPort Snap-in Modules

#### **DESIGN CONSIDERATIONS**

- Use where a floor-mounted communications outlet is required
- Floor Jack assemblies will fit standard metal boxes 3" x 2", 3" x 2 1/8" and larger
- · Durable brass floor plate withstands heavy furniture or foot traffic
- Available in single gang only
- Put blanks (PN# 41084-B\*B) in unused ports for future expansion

#### STANDARDS COMPLIANCE

Meets or exceeds all applicable standards: UL Listed; CSA Certified; Complies with NEC® Article 800 and TIA/EIA-568-B; and meets FCC Part 68.

### PHYSICAL SPECIFICATIONS

Dimensions: 2.75"W x 4.5"H x 1.66" D (loaded)

Materials: High-impact, fire-retardant plastic rated UL 94V-0

Capacity: 1-2 ports

## **INSTALLATION NOTES**

Detailed installation instructions are included in the carton


# WARRANTY INFORMATION

For a copy of Leviton product warranties, visit www.leviton.com.



#### **ELECTRONIC FILES**

For CAD files, Typical specs, or Dimensional Line Art. (.DXF, .DWG, MS-DOS.eps or .TXT), visit www.leviton.com.

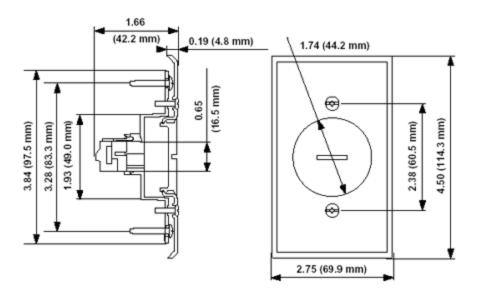

PART NUMBERS	
Description	Part No.
Floor plate assembly with one F-connector, one blank module	41650-00F
Floor plate assembly with one 6P6C connector, one blank module	41650-006
Floor plate assembly with one blank module	41652-000
Floor plate assembly with two 6P6C connector	41652-006
Floor plate assembly with one 6P6C connector, one F-connector	41652-06F

ISO 9001
REGISTERED
Quality Manufacturer

K/7 #2392