

OSW12-MAW



UPC Code : 078477508558

Country Of Origin : United States

Multi-Technology, Occupancy Sensor, Wall Mounted, 24VDC, 25mA power consumption, 1200 sq ft, 115 degree (major motion: PIR 68' radius, Minor motion: PIR 60'x30', U/S 32'x32'), Red LED=PIR, Green LED=U/S, auto adapting, walk-through, time delay 30s-30m, test mode (6s time delay for 15m with auto exit), connect gray wire for photocell ambient light hold-off, 360 degree harmonic wheel(rotatable), mounting height 8'-10', Patented Canopy Knuckle for versatile wall and ceiling mounting options, cUL/NOM/ANCE listed, Color: off-white. Made in USA

Technical Information

Product Features

Application : Cafeterias, Conference rooms, Day care centers, Offices with Cubicles, Partitioned restrooms, Open warehouses, Executive Offices, Private Offices, Open Offices, Classrooms, Computer rooms, Filing rooms, Open areas, Storage rooms, Workspaces

Color : White

Grade : Commercial

Made in USA : Yes

Mounting : Wall Mount

Mounting Height (Ft.) : 8-10 FT

Product Line : OSW12

Sensor Technology : Multi-Technology: Passive Infrared (PIR)/Ultrasonic (US)

Sensor Type : Occupancy

Time Delay : 30s-30m

True White : No

Standards and Certifications

Listings : cUL/US Certified, can be used to comply with ASHRAE 90.1 and Title 24, Part 6 occupancy sensing requirements

USMCA Compliant : Yes

Electrical Specifications

Line Voltage : No

Output Voltage : 24 VDC active high logic control signal with short circuit protection

Power Consumption : 25mA stand-by

Voltage : 24 VDC

Voltage Type : Low Voltage

Mechanical Specifications

Isolated Relay : No

Mounting Type : Wall Mount

Size : Height 6.43" (163.32mm), Depth 4.67" (118.61mm), Sensor Width 2.80" (71.12mm), Base Width 4.23" (107.44mm)

Performance Specifications

Coverage (Sq.Ft.) : 1200

Pattern : 115°

Environmental Specifications

Operating Temperature : 32° to 104°F (0° to 40°C)

Relative Humidity : 0% to 95% non-condensing

Type

Product Type : Occupancy Sensor

Warranty

Warranty : 5-Year Limited

Patents*


N_A

USD511705

US7211798

USD548125

*This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

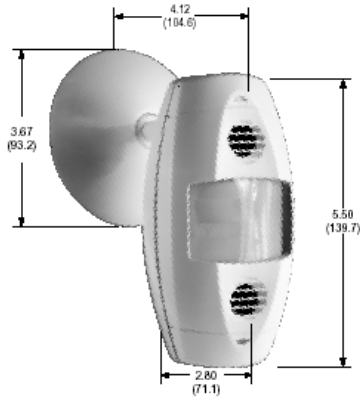

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2021 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

