

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	33W
120V	0.32A	Color Temp	3500K (Warm Neutral)
208V	0.176A	Color Accuracy	90 CRI
240V	0.153A	L70 Lifespan	50,000 Hours
277V	0.14A	Lumens	3,017
Input Watts	32.4W	Efficacy	90.90909091

Technical Specifications

Compliance

UL Listed & UL Classified:

Suitable for wet locations

ENERGY STAR V2.2:

This product is ENERGY STAR® Version 2.2 Certified.

Energy Star Model Number:

DLC0024

Energy Star ID:

2350077

California Title 24:

Can be used to conform with the requirements of California Title 24 Part 6.

Electrical

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

<20%

Power Factor:

≥0.9

THDi:

Produces less than 20% THD

PF:

≥0.9

Input Voltage:

120V through 277V

Operating Frequency (Hz):

50/60Hz

Performance

Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Construction

Air Tight:

Housing certified Air Tight as per ASTM E283

Technical Specifications (continued)

Construction

Housing:

Made from precision die-cast aluminum construction, dissipates heat from electrical components

Cold Weather Starting:

The minimum starting temperature is -30°C (-22°F)

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Green Technology:

Mercury and UV free. RoHS-compliant components.

Mounting:

Robust retention clips spring loaded tabs ensure the fixture is securely installed. Can be installed in 1/4" to 1 1/2" thick ceilings.

Lens:

Diffuse Polystyrene lens produces smooth uniform light that is glare free

Finish:

Matte White

Optical

Beam Angle:

90°±10°

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Wattage Equivalency:

2 X 42W CFL

R9 Value:

High color performance with R9 greater than or equal to 50

Flicker:

Silent and flicker free operations of less than 30%

Other

Template:

Template included for easy ceiling cut out

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Accessories:

DLPLATE/T: New Construction or Remodel Plate for T-Grid ceilings for use with 6" and 8" Models

DLPLATE/SJ: New Construction Plate for Stud/Joist mounting for use with 6" and 8" Models

DL8-10GOOF/R/P: 10" Goof Ring for 8" Commercial Downlight

DL8-12GOOF/R/P: 12" Goof Ring for 8" Commercial Downlight

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act


Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	4	20.47	13.58	10.33
PALLET	224	9.63	9.63	85.04

Dimension

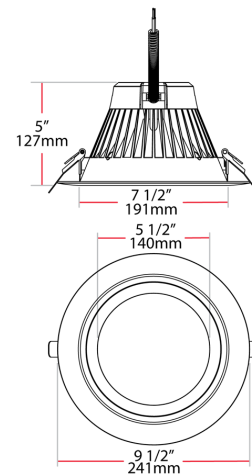

Ordering Matrix

Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish
C	8	R	33	935	UNV	W
	6 = 6" 8 = 8"	R = Round	12 = 12W 18 = 18W 24 = 24W 33 = 33W	940 = 90 CRI, 4000K 935 = 90 CRI, 3500K 930 = 90 CRI, 3000K	UNV = 120-277V	W = White