



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
P24E30M-XXYZ	SEE SHEET 2

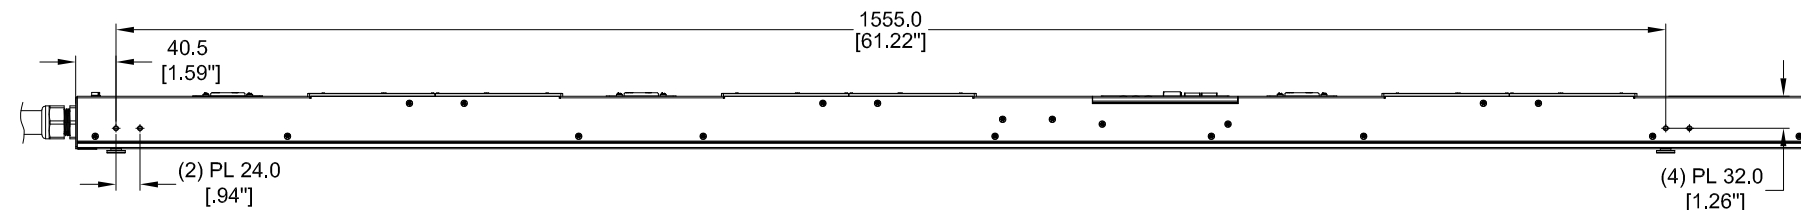


LEFT VIEW

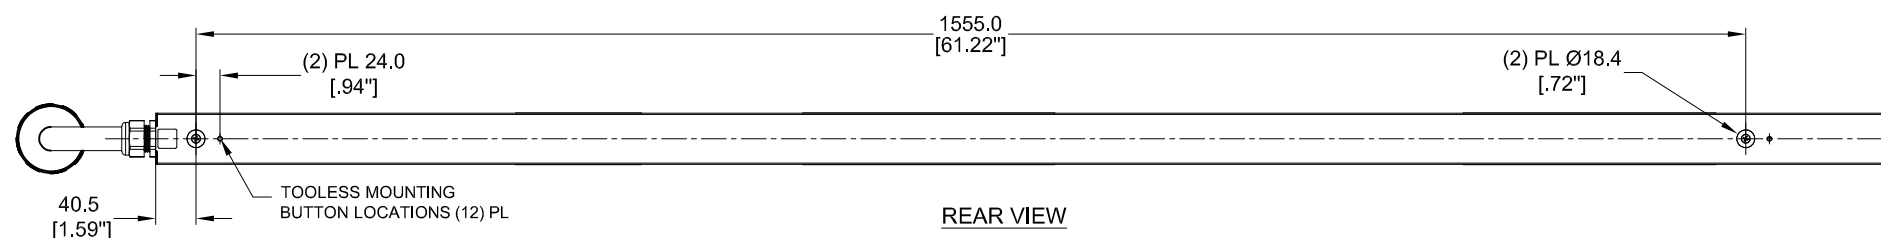

REAR VIEW

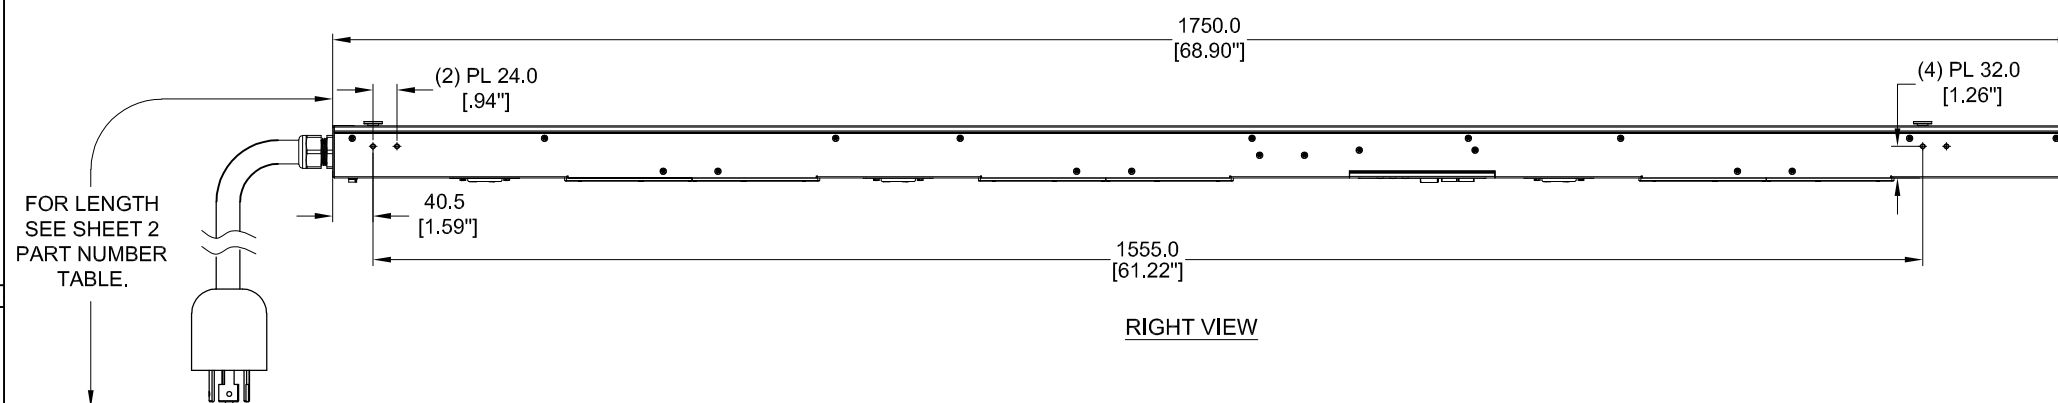

RIGHT VIEW

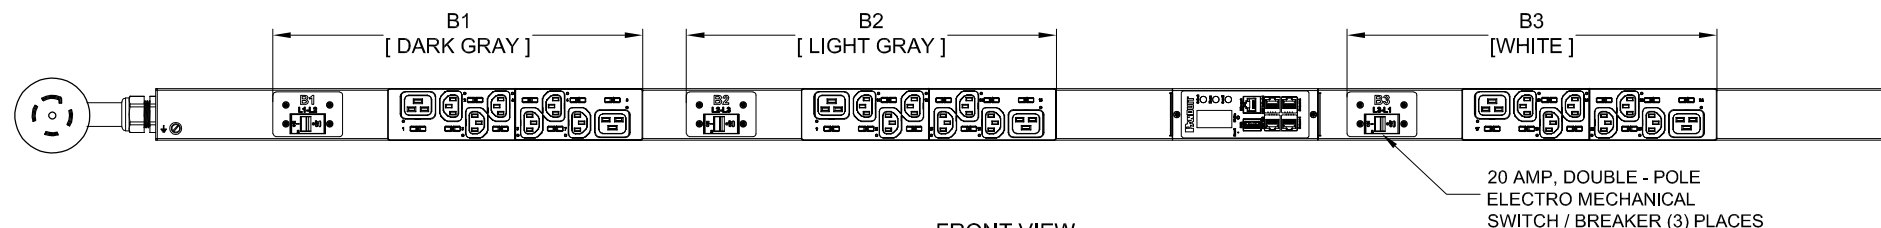

FRONT VIEW

SPECIFICATION:

1. STANDARD:

UNIT TYPE:	MONITORED SWITCHED
ORIENTATION:	VERTICAL, 0U, FULL
OUTLET QTY&TYPE:	(18) C13, (6) C19
INPUT VOLTAGE:	100-120/200-240VAC
INPUT CURRENT:	30A (24A DERATED)
BREAKER QTY&TYPE:	(3) 20AMP, DOUBLE-POLE
INPUT PHASE:	THREE-PHASE WYE
RATED POWER:	8.6kVA
INPUT PLUG:	NEMA L21-30P
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:

NONE

3. ACCESSORIES:


(1) QUICK-START GUIDE

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: **P24E30M-XX Y Z**

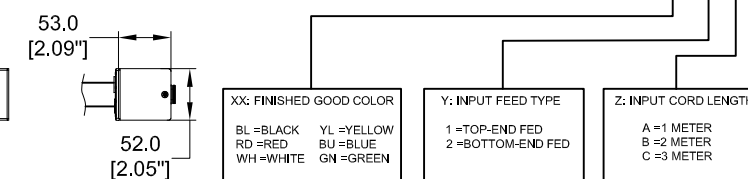

BOTTOM VIEW

PLUG/RECEPTACLE BLOCK



PLUG
NEMA L21-30P, 4P 5W
30A, 120/208V MAX RATED INPUT
24A DERATED



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P24E30M
01A	10/10/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24E30M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY			SIGN	DATE	PRINT
TITLE INTELLIGENT SERIES PDU P24E30M-XXYZ CUSTOMER DRAWING					
ITEM REVISION NAME:			PANDUIT		
DATASHEET FILE NAME:					
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]			MATERIAL/COLOR:		
 THIRD ANGLE PROJECTION Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0			N/A		
DRAWN BY GEORGE			DRAWING NUMBER: P24E30M_DC		
DATE 10/10/2017	CHK SEAN	SCALE NONE	SHT 1 OF 2		SCALE B

B



A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24E30M	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[*+10'/-5"]	9.4kg
P24E30M-BL1A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[*+3.5'/-1.75"]	8.2kg
P24E30M-BL1B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[*+7'/-3.5"]	8.8kg
P24E30M-RD1A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[*+3.5'/-1.75"]	9.4kg
P24E30M-RD1B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[*+7'/-3.5"]	8.2kg
P24E30M-RD1C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[*+10'/-5"]	8.8kg
P24E30M-WH1A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[*+3.5'/-1.75"]	9.4kg
P24E30M-WH1B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[*+7'/-3.5"]	8.2kg
P24E30M-WH1C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[*+10'/-5"]	8.8kg
P24E30M-YL1A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[*+3.5'/-1.75"]	9.4kg
P24E30M-YL1B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[*+7'/-3.5"]	8.2kg
P24E30M-YL1C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[*+10'/-5"]	8.8kg
P24E30M-BU1A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[*+3.5'/-1.75"]	9.4kg
P24E30M-BU1B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[*+7'/-3.5"]	8.2kg
P24E30M-BU1C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[*+10'/-5"]	8.8kg
P24E30M-GN1A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[*+3.5'/-1.75"]	9.4kg
P24E30M-GN1B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[*+7'/-3.5"]	8.2kg
P24E30M-GN1C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[*+10'/-5"]	8.8kg
P24E30M-BL2A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[*+3.5'/-1.75"]	9.4kg
P24E30M-BL2B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[*+7'/-3.5"]	8.2kg
P24E30M-BL2C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[*+10'/-5"]	8.8kg
P24E30M-RD2A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[*+3.5'/-1.75"]	9.4kg
P24E30M-RD2B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[*+7'/-3.5"]	8.2kg
P24E30M-RD2C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[*+10'/-5"]	8.8kg
P24E30M-WH2A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[*+3.5'/-1.75"]	9.4kg
P24E30M-WH2B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[*+7'/-3.5"]	8.2kg
P24E30M-WH2C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[*+10'/-5"]	8.8kg
P24E30M-YL2A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[*+3.5'/-1.75"]	9.4kg
P24E30M-YL2B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[*+7'/-3.5"]	8.2kg
P24E30M-YL2C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[*+10'/-5"]	8.8kg
P24E30M-BU2A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[*+3.5'/-1.75"]	9.4kg
P24E30M-BU2B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[*+7'/-3.5"]	8.2kg
P24E30M-BU2C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[*+10'/-5"]	8.8kg
P24E30M-GN2A	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[*+3.5'/-1.75"]	9.4kg
P24E30M-GN2B	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[*+7'/-3.5"]	8.2kg
P24E30M-GN2C	VERTICAL,(18) C13,(6) C19,MONITORED SWITCHED, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[*+10'/-5"]	8.8kg

1

B



A

02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P24E30M
01A	10/10/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24E30M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL, PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P24E30M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A	
THIRD ANGLE PROJECTION		DRAWING NUMBER: P24E30M_DC	
DRAWN BY GEORGE	DATE 10/10/2017	CHK SEAN	SCALE NONE
SHT 2 OF 2		SCALE B	

2



2

1

