



PANDUIT P/N	WEIGHT
P06B03M	8.2kg

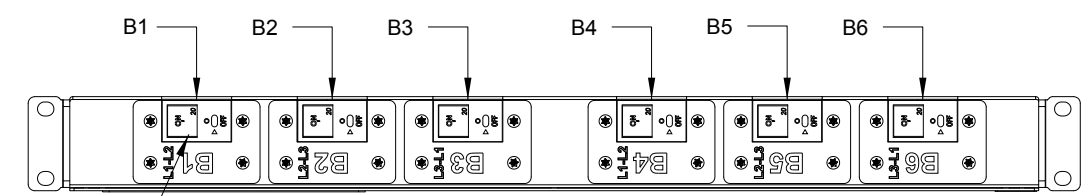


20 AMP, DOUBLE - POLE ELECTRO MECHANICAL SWITCH / BREAKER (6) PLACES


REAR VIEW

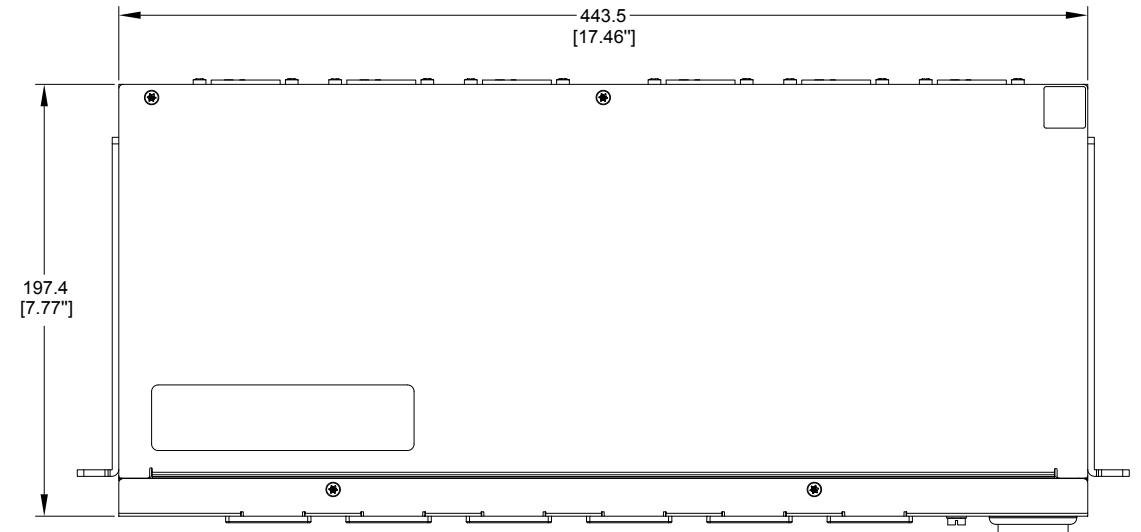

TOP VIEW

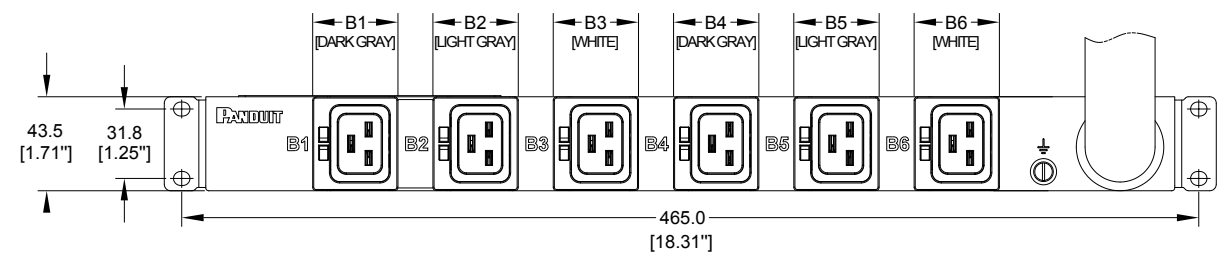

FRONT VIEW

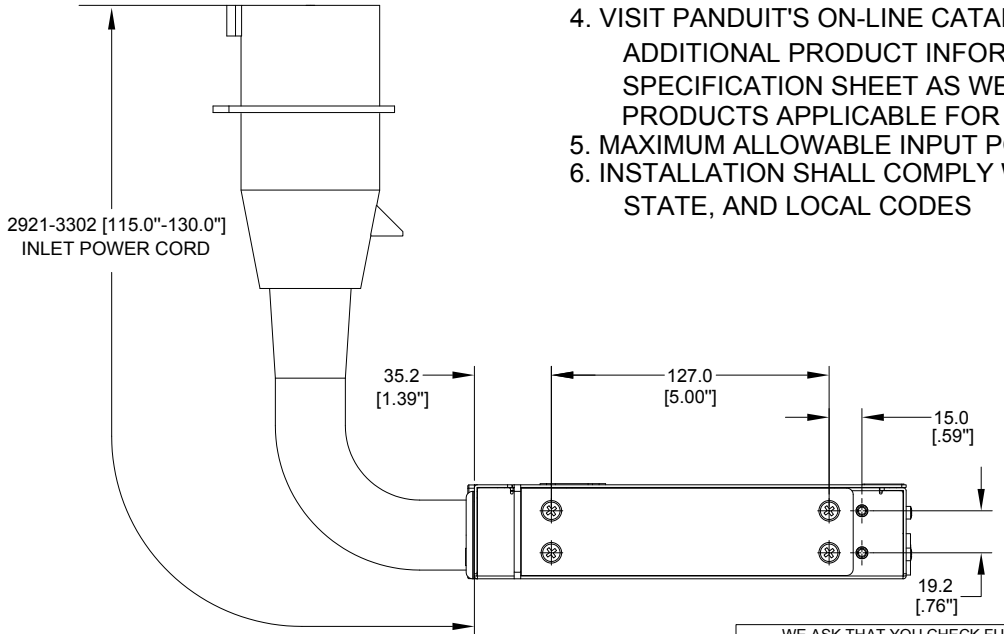

SIDE VIEW

NOTES:

- IDENTIFICATION:
  - UNIT TYPE: BASIC
  - ORIENTATION: HORIZONTAL, 1U
  - OUTLET QTY&TYPE: (6) C19
  - BREAKER QTY&TYPE: (6) 20AMP, DOUBLE-POLE
  - INPUT VOLTAGE: 200-240VAC DELTA
  - INPUT CURRENT: 60A (48A DERATED)
  - INPUT PHASE: THREE-PHASE DELTA
  - RATED POWER: 17.3kVA
  - INPUT PLUG: IEC 60309, 3P+E, 9H, 60A
  - INPUT CORD LENGTH: 3m [10']
- ACCESSORIES:
  - POCKET GUIDE
  - QTY: (4) M6 X 12 PAN HEAD MACHINE SCREWS
  - QTY: (4) M6 CAGED NUT
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 17.3 kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

**PLUG**  
60 AMP, 250V x 3~ DELTA  
3P/4W  
IEC 60309, SPLASHPROOF, IP44  
2G (S); 2W (W), 9H

**SIX (6) RECEPTACLES**  
16 AMP, 250V  
STRAIGHT BLADE  
IEC 60320/C19

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01B	08/21/2017	JIANG	MIM	EDM	REVISED TOLERANCES	P06B03M
01A	06/28/2017	JIANG	MIM	EDM	INITIAL RELEASE	P06B03M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

TITLE: BASIC SERIES PDU  
P06B03M  
CUSTOMER DRAWING

ITEM REVISION NAME:  
DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)  
0<L<50 ±0.5  
50<L<250 ±1.0  
250<L<500 ±1.5  
500<L<1000 ±2.5  
1000<L<2000 ±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR: N/A

DRAWING NUMBER: P06B03M\_DC

DRAWN BY: JIANG DATE: 05/24/2017 CHK: SEAN SCALE: NONE

SHT 1 OF 1