

LED19UL-08E26-XPW-101W

LED Omnidirectional Post Top Lamp, 9W, E26 Base
100~277Vac, Pure White, 5000K



DWG BY:
SIL / GP
01-06-15


R&D:
LUV
11-09-16

MFG:
SS
11-09-16

QA:
JH
11-09-16

REVISION LTR: B
ECR#: 110316-UF01
11-03-16

○ **Dimensions**

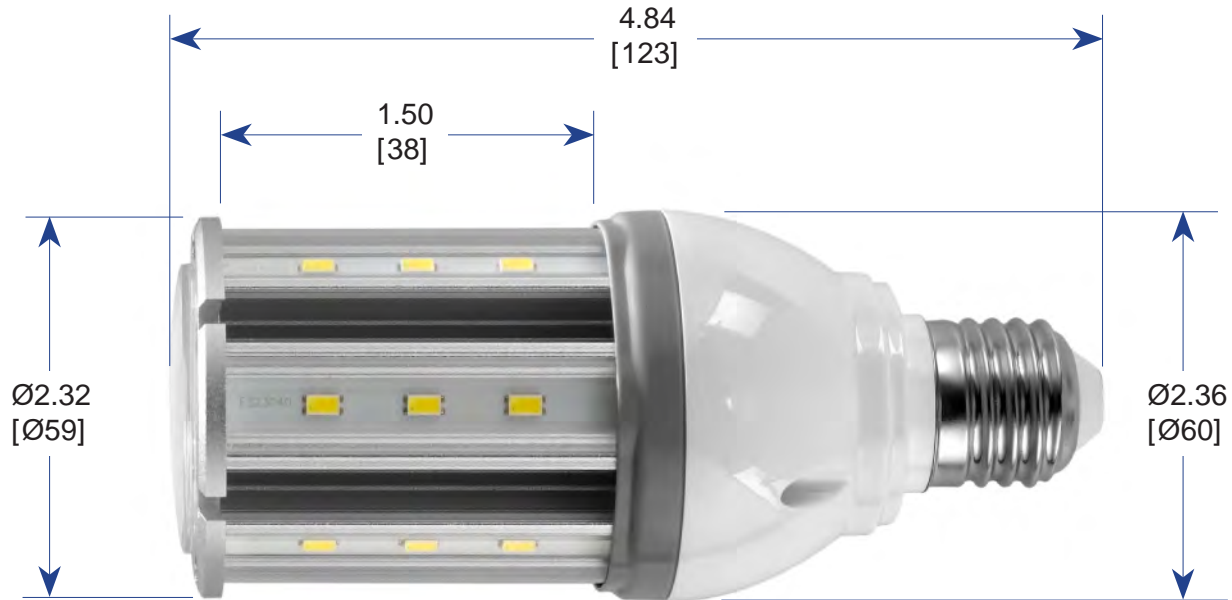

Tolerance:

XXX +/- .010
 XX +/- .025

Notes:

1. All Dimensions are in Inches [Millimeters].



○ **Electro-Optical Characteristics**

Input Voltage (typ)	100~277Vac
Tested @ (Voltage)	120Vac
Power Consumption	9W
Current Consumption	0.075 A
Efficacy: (Lm/W)	115
Lumens	1020 lm
Max Ft-Cd	120 cd
Power Factor	1.0
CRI (Ra)	>80
CCT	4800K~5500K
Color	Pure White
Angle of illumination	Omnidirectional

○ **Features**

Operating Temperature	-20°C to +65°C
Storage Temperature	-40°C to +80°C
Heatsink Temperature	50°C
Heatsink Material	Aluminum
Body Material	Polycarbonate
Body Color	Gray & White
UL/cUL Listed	E322319 (LED19UL-08E26-XXX-X0XXX)
LED LM80 Report	Yes
LM79 Report	-
LED qty.	24pcs. LM561B
Dimmable	No
Life Span	40,000 hrs.
Warranty	5 Years
Weight	0.51 lbs.