
Project		**Catalog #**		**Type**	
Prepared by		**Notes**		**Date**	

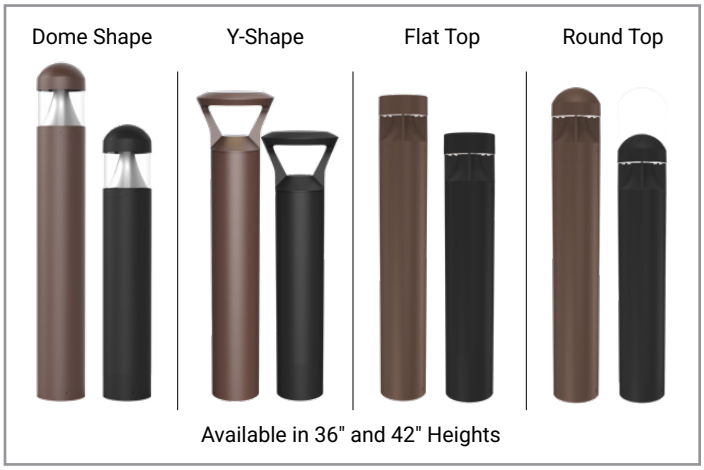

LUMARK

BOL Bollard

Pathway Luminaire

PRODUCT FEATURES

selectable lumens · seleCCTable colors · DUSK-TO-DAWN · MARKETPRO STOCK PROGRAM

PRODUCT CERTIFICATION

UL CERTIFIED · IP65 · RoHS COMPLIANT · DLC LISTED · 5 YEAR LIMITED WARRANTY

INTERACTIVE MENU


- Ordering Information page 2
- Product Specifications page 2
- Energy and Performance Data page 2

QUICK FACTS


- 3 selectable wattage, 3 selectable CCT
- Field Selectable configurations available
- Round bollard with 4 head options
- 2 heights: 42" and 36" available
- Available in bronze and black
- Emergency Battery Pack catalog numbers available
- Efficacies up to 152 LPW
- Outdoor parking lot, pedestrian spaces, walkways, building areas, etc
- Factory Fixed configurations available

DIMENSIONAL DETAILS


BOLD=DOME-SHAPE

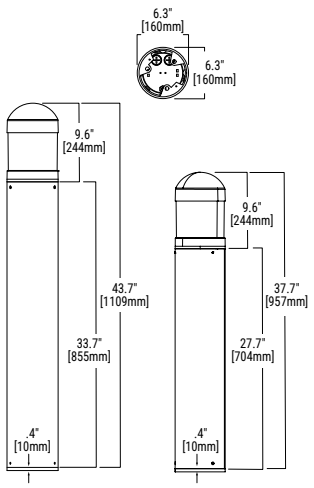


BOLY=Y-SHAPE

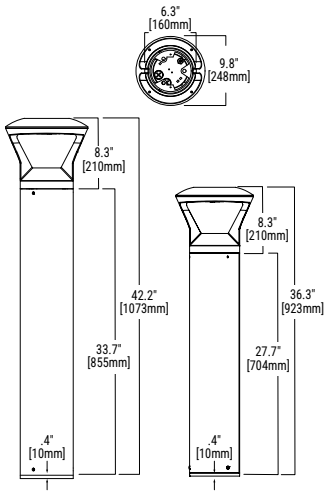

BOLF=FLAT TOP

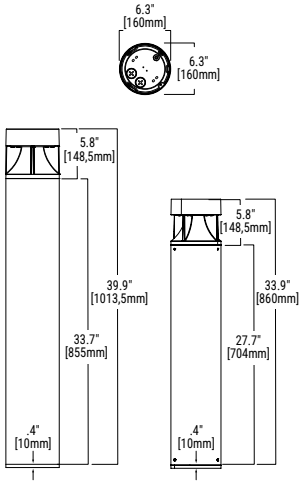

BOLR=ROUND TOP

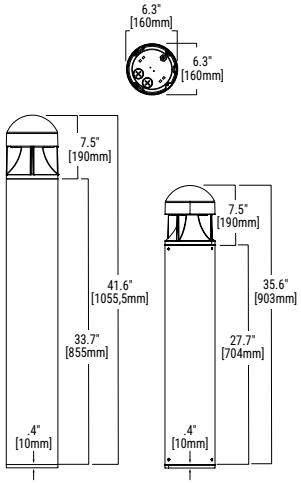

STOCK ORDERING INFORMATION

42" FIXTURE					
Fixture Type	**Wattage**	**Voltage**	**Selectable CCT**	**Controls**	**Lumen Output**
BOLD42-25S-BZ = Dome-shaped Bollard [1], Bronze	Selectable 15W-20W-25W	50-60Hz, 120-277V Universal	Selectable CCT: 3000, 4000, & 5000K	Selectable Dusk-to-Dawn via Button-type photocontrol	Up to 3,817 Lms
BOLD42-25S-BK = Dome-shaped Bollard [1], Black					
BOLD42-25SE-BZ = Dome-shaped Bollard [1], Bronze, EBP					
BOLD42-25SE-BK = Dome-shaped Bollard [1], Black, EBP					
BOLY42-25S-BZ = Y-Shaped Bollard [1], Bronze	Selectable 15W-20W-25W	50-60Hz, 120-277V Universal	Selectable CCT: 3000, 4000, & 5000K	Selectable Dusk-to-Dawn via Button-type photocontrol	Up to 3,377 Lms
BOLY42-25S-BK = Y-Shaped Bollard [1], Black					
BOLY42-25SE-BZ = Y-Shaped Bollard [1], Bronze, EBP					
BOLY42-25SE-BK = Y-Shaped Bollard [1], Black, EBP					
BOLF42-25S-BZ = Flat Top Bollard, Bronze	Selectable 15W-20W-25W	50-60Hz, 120-277V Universal	Selectable CCT: 3000, 4000, & 5000K	Selectable Dusk-to-Dawn via Button-type photocontrol	Up to 2,412 Lms
BOLF42-25S-BK = Flat Top Bollard, Black					
BOLF42-25SE-BZ = Flat Top Bollard, Bronze, EBP					
BOLF42-25SE-BK = Flat Top Bollard, Black, EBP					
BOLR42-25S-BZ = Round Top Bollard, Bronze	Selectable 15W-20W-25W	50-60Hz, 120-277V Universal	Selectable CCT: 3000, 4000, & 5000K	Selectable Dusk-to-Dawn via Button-type photocontrol	Up to 2,412 Lms
BOLR42-25S-BK = Round Top Bollard, Black					
BOLR42-25SE-BZ = Round Top Bollard, Bronze, EBP					
BOLR42-25SE-BK = Round Top Bollard, Black, EBP					

36" FIXTURE					
Fixture Type	**Wattage**	**Voltage**	**Selectable CCT**	**Controls**	**Lumen Output**
BOLD36-25S-BZ = Dome-shaped Bollard [1], Bronze	Selectable 15W-20W-25W	50-60Hz, 120-277V Universal	Selectable CCT: 3000, 4000, & 5000K	Selectable Dusk-to-Dawn via Button-type photocontrol	Up to 3,817 Lms
BOLD36-25S-BK = Dome-shaped Bollard [1], Black					
BOLD36-25SE-BZ = Dome-shaped Bollard [1], Bronze, EBP					
BOLD36-25SE-BK = Dome-shaped Bollard [1], Black, EBP					
BOLY36-25S-BZ = Y-Shaped Bollard [1], Bronze	Selectable 15W-20W-25W	50-60Hz, 120-277V Universal	Selectable CCT: 3000, 4000, & 5000K	Selectable Dusk-to-Dawn via Button-type photocontrol	Up to 3,377 Lms
BOLY36-25S-BK = Y-Shaped Bollard [1], Black					
BOLY36-25SE-BZ = Y-Shaped Bollard [1], Bronze, EBP					
BOLY36-25SE-BK = Y-Shaped Bollard [1], Black, EBP					
BOLF36-25S-BZ = Flat Top Bollard, Bronze	Selectable 15W-20W-25W	50-60Hz, 120-277V Universal	Selectable CCT: 3000, 4000, & 5000K	Selectable Dusk-to-Dawn via Button-type photocontrol	Up to 2,412 Lms
BOLF36-25S-BK = Flat Top Bollard, Black					
BOLF36-25SE-BZ = Flat Top Bollard, Bronze, EBP					
BOLF36-25SE-BK = Flat Top Bollard, Black, EBP					
BOLR36-25S-BZ = Round Top Bollard, Bronze	Selectable 15W-20W-25W	50-60Hz, 120-277V Universal	Selectable CCT: 3000, 4000, & 5000K	Selectable Dusk-to-Dawn via Button-type photocontrol	Up to 2,412 Lms
BOLR36-25S-BK = Round Top Bollard, Black					
BOLR36-25SE-BZ = Round Top Bollard, Bronze, EBP					
BOLR36-25SE-BK = Round Top Bollard, Black, EBP					

Options
BOLHKIT = Spare Hardware Kit [Anchor Bolt Carrier (x1), Nut (x12), Spring Washer (x3), Flat Washer (x6), Anchor Bolts (x3), Hex Wrench (x1) **HSS** = House Side Shield Accessory
NOTES: 1. DesignLights Consortium® Qualified. Refer to www.designlights.org Qualified Products List under Family Models for details.

FACTORY FIXED* ORDERING INFORMATION

Sample Ordering Number: *BOLD36-25S-BZ-L100-830-ON*

Bollard Head Design	Height	Fixture Color	Lumen Output	Color Temperature	Photocontrol
BOLD = Dome-Shaped head **BOLY** = Y-Shaped head **BOLF** = Flat Top head **BOLR** = Round Top head	**42-25S** = 42" height **36-25S** = 36" height	**BZ** = Bronze **BK** = Black	**L100** = 100% max lumen output** **L80** = 80% max lumen output** **L60** = 60% max lumen output**	**830** = 80 CRI, 3000K **840** = 80 CRI, 4000K **850** = 80 CRI, 5000K	**ON** = Photocontrol Enabled **OFF** = Photocontrol Disabled
Notes: *Field Selectable switch settings will be locked out with mechanically adhered cover screwed over selectable switches, preserves lumen, CCT, and Photocontrol Settings **See performance tables for lumen output.					

PRODUCT SPECIFICATIONS

Construction
- Robust die-cast aluminum housing for durability
- Round bollard construction
- 42” and 36" heights

Optics
- 15W-20W-25W
- 80CRI
- 4 heads
- Polycarbonate lens standard on BOLD fixture type

Electrical
- 6kv surge protection
- Power Factor > 0.9
- Total Harmonic Distortion < 20%
- 0-10V dimming compatibility is standard

Controls
- Photocell with On/Off switch standard (Factory Standard Setting: 25W, 4000K, in ON Position)

Typical Applications
- Outdoor
- Parking Lots
- Walkways
- Building Areas

Finish
- The exterior is protected by a rust-resistant powder coat finish that provides superior resistance to weathering and corrosion.
- Textured architectural bronze powder coat finish.
- Textured black powder coat finish.

Installation
- Accessory hardware included

Compliance
- DesignLights Consortium® (DLC 5.1) qualified.
- IP65(UL listed for wet locations).
- Rated for ambient operating temperature -40°F to 108°F (-40°C to 40°C).
- Estimated 50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

Shipping Data (42" Fixture)
- BOLD = 12.9 lbs
- BOLY = 15.25 lbs
- BOLF = 13.9 lbs
- BOLR = 13.9 lbs

Warranty
- Five-year limited warranty. Consult website for details. www.cooperlighting.com/legal

ENERGY AND PERFORMANCE DATA

Fixture Type	CCT Setting	Lumen Setting	Lumens	Wattage	Efficacy
BOLY	3000K	High	3170	26	122
		Mid	2524	20	125
		Low	1889	15	127
	4000K	High	3334	25	133
		Mid	2645	20	135
		Low	1964	15	135
	5000K	High	3377	26	131
		Mid	2700	20	134
		Low	2018	15	136
BOLD	3000K	High	3579	26	140
		Mid	2858	20	144
		Low	2153	15	145
	4000K	High	3763	25	152
		Mid	2993	19	154
		Low	2244	15	155
	5000K	High	3817	25	151
		Mid	3049	20	154
		Low	2311	15	156

Fixture Type	CCT Setting	Lumen Setting	Lumens	Wattage	Efficacy
BOLF	3000K	High	2287	26	88
		Mid	1837	20	90
		Low	1375	15	92
	4000K	High	2400	25	96
		Mid	1924	20	97
		Low	1434	15	98
	5000K	High	2412	26	93
		Mid	1947	20	96
		Low	1458	15	98
BOLR	3000K	High	2287	26	88
		Mid	1837	20	90
		Low	1375	15	92
	4000K	High	2400	25	96
		Mid	1924	20	97
		Low	1434	15	98
	5000K	High	2412	26	93
		Mid	1947	20	96
		Low	1458	15	98

Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

© 2026 Cooper Lighting Solutions
All Rights Reserved.

Specifications and dimensions subject to change without notice.