Product data sheet

Specifications



Remote control cable, Harmony SCU, 3 m for panel

HMIZSURDP

Product availability: Stock - Normally stocked in distribution facility

Main

Product or Component Type	Remote control cable

Complementary

Cable length	9.8 ft (3 m)
Height	4.1 in (105.4 mm)
Depth	0.94 in (23.75 mm)
Width	5.17 in (131.33 mm)
Net Weight	1.519 lb(US) (0.689 kg)

Ordering and shipping details

Category	US10MC222569
Discount Schedule	0MC2
GTIN	3595864175614
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.835 in (7.200 cm)
Package 1 Width	7.244 in (18.400 cm)
Package 1 Length	10.512 in (26.700 cm)
Package weight(Lbs)	25.044 oz (710.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	6
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	10.472 lb(US) (4.750 kg)
Unit Type of Package 3	P12
Number of Units in Package 3	96
Package 3 Height	29.528 in (75.000 cm)

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Package 3 Width	31.496 in (80.000 cm)
Package 3 Length	47.244 in (120.000 cm)
Package 3 Weight	167.551 lb(US) (76.000 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**12 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**7 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**1 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**2 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**2 kg CO2 eq.**
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

F-gas usage performance	**Only air and vacuum used for insulation / breaking, no F-gas including SF6**
Packaging made with recycled cardboard	**No**
Packaging without single use plastic	**No**
SCIP Number	**69107a2b-eec5-4280-8fc1-e988a903c9a2**
EU RoHS Directive	Compliant By Exemption
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**
Halogen content performance	**Product contains halogen above thresholds**
PVC free	**No**
Silicon free	**No**


Use Again

Repack and remanufacture

Recyclability potential, in %	**25**
Circularity Profile	End of Life Information
Take-back	**No**
WEEE Label	**The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.**

Dimensions Drawings

Dimensions

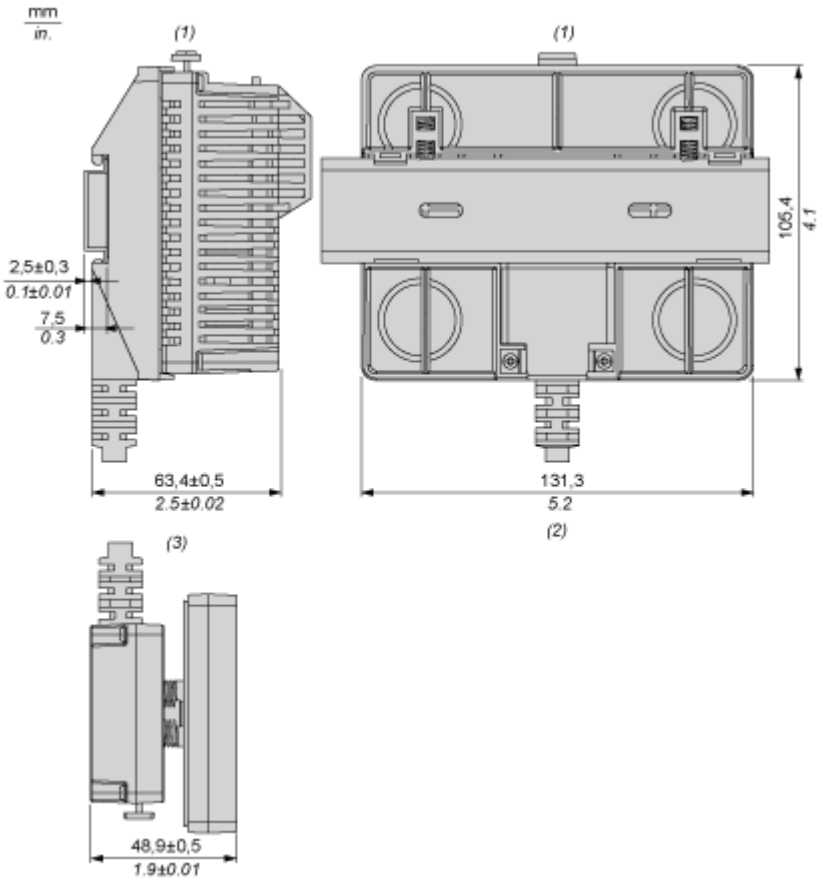


(1) Rear module

(2) Rear module remote cable

(3) Panel remote cable

Mounting and Clearance


Recommended Mounting position

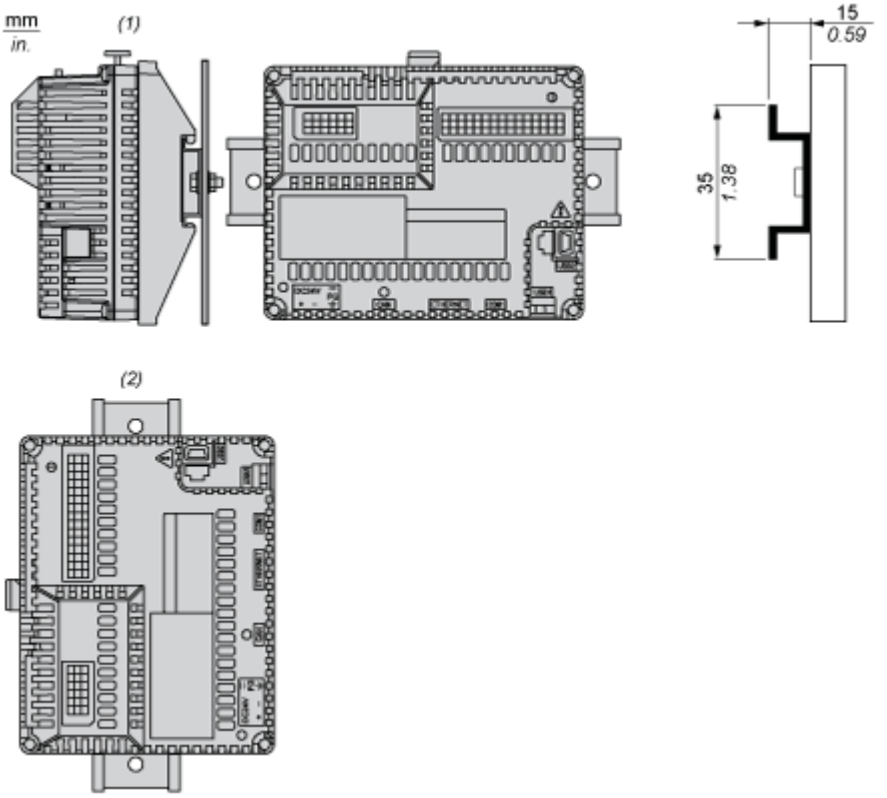


(1) Horizontal mounting

(2) Vertical mounting

No Recommended Mounting Position

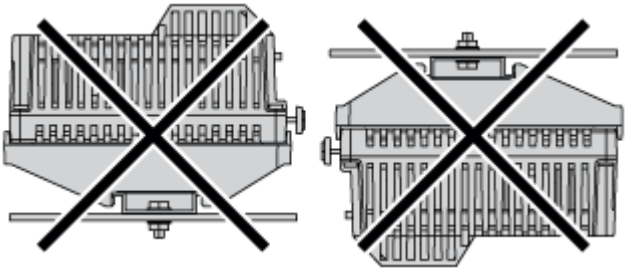

Clearance

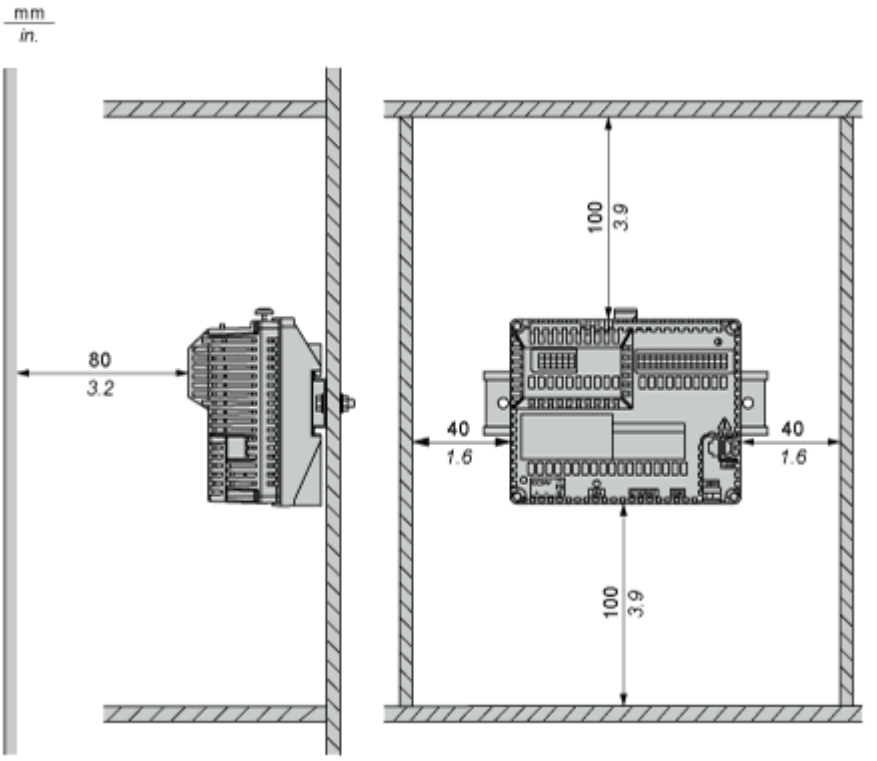

Keep adequate spacing for proper ventilation to maintain an ambient temperature between 0...50 °C (32...122 °F) for horizontal installation and 0...40 °C (32...104 °F) for vertical installation.