

# Mogul Conduit Bodies with Cover and Gasket

## LL Type - Hot Dip Galvanized - Malleable Iron

### Features

- c(UL)us wet locations
- Threaded NPT tapered hubs for Rigid and IMC conduit
- Smooth and round integral hub bushings protect conductor insulation
- Access to wiring for maintenance and future changes
- Assembled with raised cover, gasket and stainless steel cover screws

### Applications

- Use to pull straight or 90° angle turns or making taps and splices
- Provides long and large openings for pulling large conductors, splicing and taps
- Serve as a pull outlets for conductors that are stiff

### Standard Material


- Body - Malleable iron
- Gasket - Neoprene rubber
- Screws - Stainless steel

### Standard Finish

- Hot dip galvanized

### Applicable Third Party Standards

- UL Standard: UL 514A - UL 514D
- Fed. Spec: W-C-586D, A-A-50563
- NEMA: FB 1-2014 - NEMA 3R
- CSA Standard C22.2 No. 18.3; CSA certified

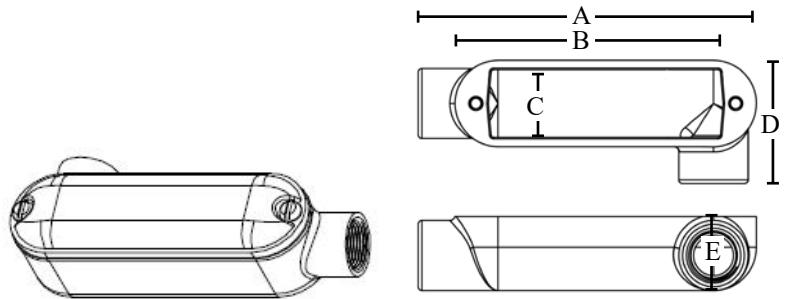

| Catalog Number   | UPC   | Size          | Max. Number | Max. Size | Internal Volume (in <sup>3</sup> ) | Ship Case | Weight/Case | A     | B    | C    | D    | E    |
|------------------|-------|---------------|-------------|-----------|------------------------------------|-----------|-------------|-------|------|------|------|------|
| <b>MLL3CGHDG</b> | 00985 | <b>1"</b>     | 3           | 4 AWG     | 19                                 | 1         | 4           | 8.62  | 5.98 | 1.71 | 3.12 | 1.87 |
| <b>MLL4CGHDG</b> | 00986 | <b>1-1/4"</b> | 3           | 2 AWG     | 25                                 | 1         | 6           | 8.62  | 5.98 | 1.71 | 3.12 | 2.31 |
| <b>MLL5CGHDG</b> | 00987 | <b>1-1/2"</b> | 3           | 1/O AWG   | 57                                 | 1         | 10          | 12.72 | 10   | 2.26 | 4.08 | 2.58 |
| <b>MLL6CGHDG</b> | 00988 | <b>2"</b>     | 3           | 4/O AWG   | 75                                 | 1         | 14          | 12.72 | 10   | 2.26 | 4.08 | 3.17 |