
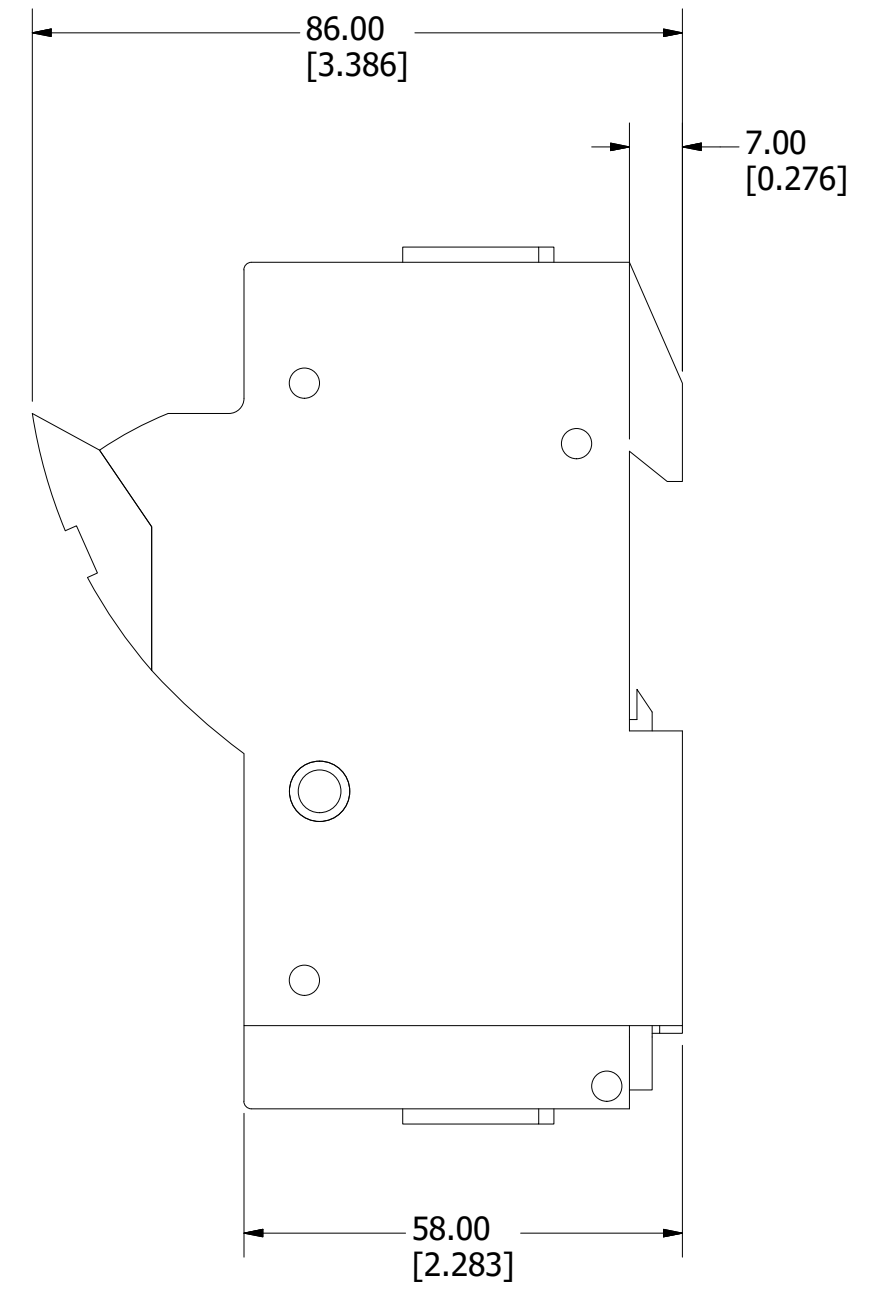
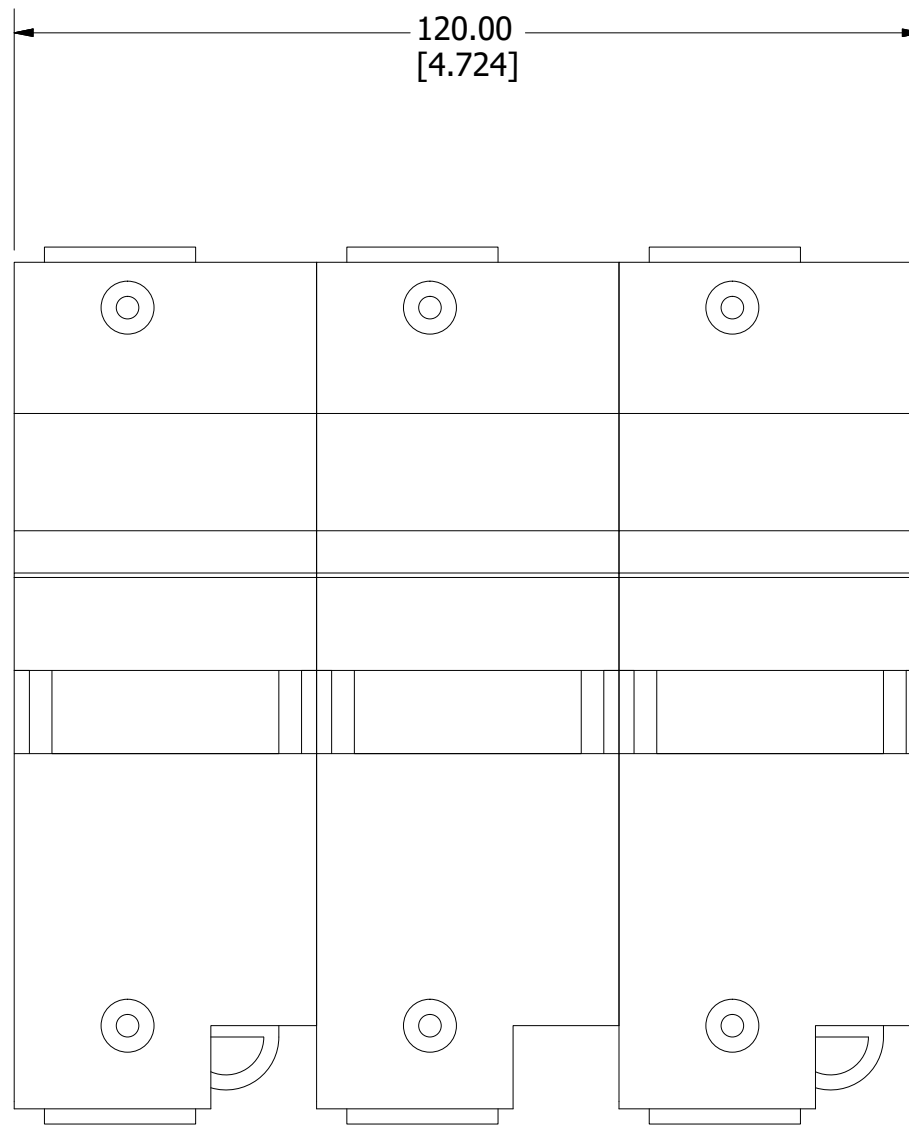
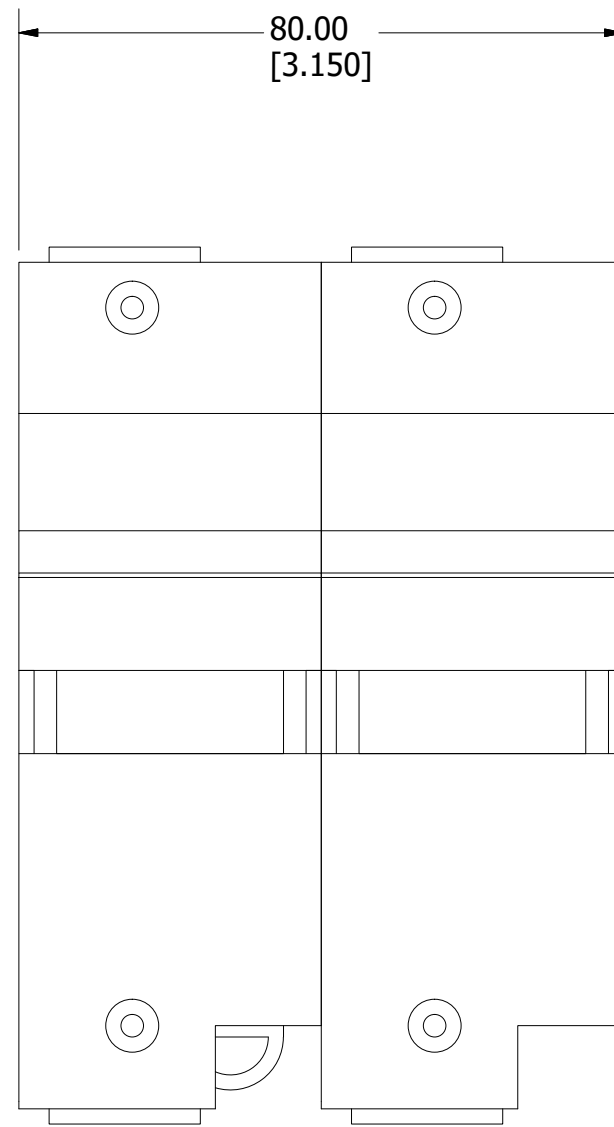


REVISION		
REV	DATE	DESCRIPTION
A	5/19/2014	510464ECP - RELEASE MRY
B	5/11/2015	514236ECP/D - UPDATE WIRE RANGE & TORQUE MRY
C	8/9/19	521011ECP/D - REMOVE MIDDLE DIN CLIP MRY
D	9/27/21	524259ECP/D - REMOVE RIGHT-SIDE DIN CLIP ON 2-POLE DETAIL MRY

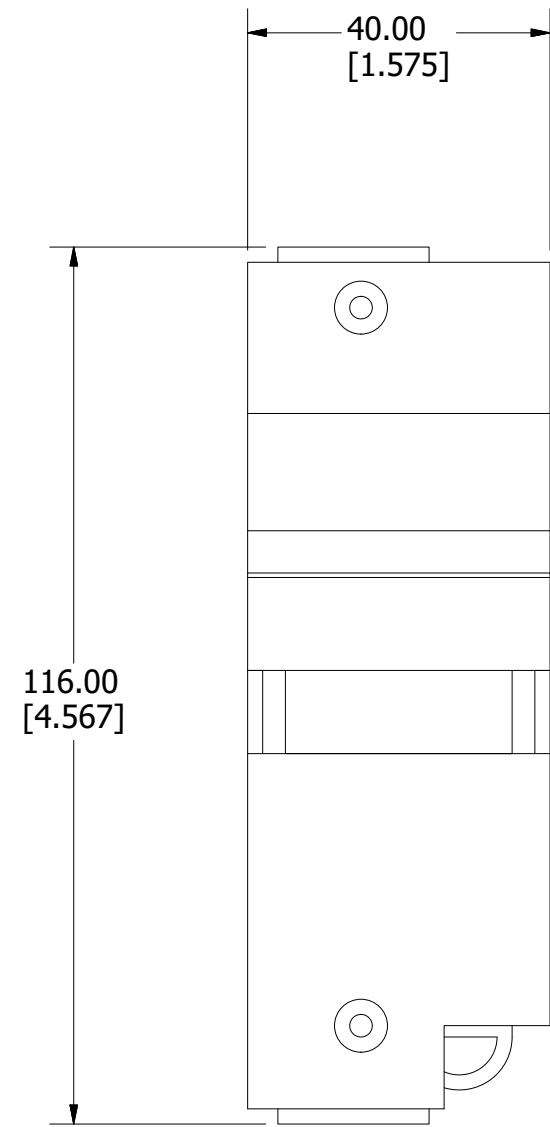

**SPECIFICATIONS:**

**VOLTAGE RATING:** 600V

**AMPERE RATING:** 60 AMPERES

**INTERRUPT RATING:** 200kA

**WIRE RANGE:** 2,5-50mm<sup>2</sup>  
#14-1 AWG  
Cu ONLY

**SUGGESTED TORQUE:** 2,5-50mm<sup>2</sup> 4Nm  
#14-1 35 lb-in

**APPROVALS:** UL LISTED (FILE NO. E14721)  
CSA CERTIFIED (FILE NO. 256018)

●	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE
(ST)	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

MATL SPEC	FINISH		
DRW MYORK	DATE 5/7/2014	SCALE NTS	FINISH GOOD WT GRAMS/PIECE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [ ] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994



**TITLE** LFPSJ 60A SERIES OUTLINE

CHICAGO, ILLINOIS 60631	REVISION D	DRWG NO. OL-LFPSJ600	SHEET 1 OF 1 SERIES
-------------------------	------------	----------------------	---------------------