


| REV | DATE      | REVISION | DESCRIPTION |
|-----|-----------|----------|-------------|
| A   | 10/2/2005 |          | Value       |

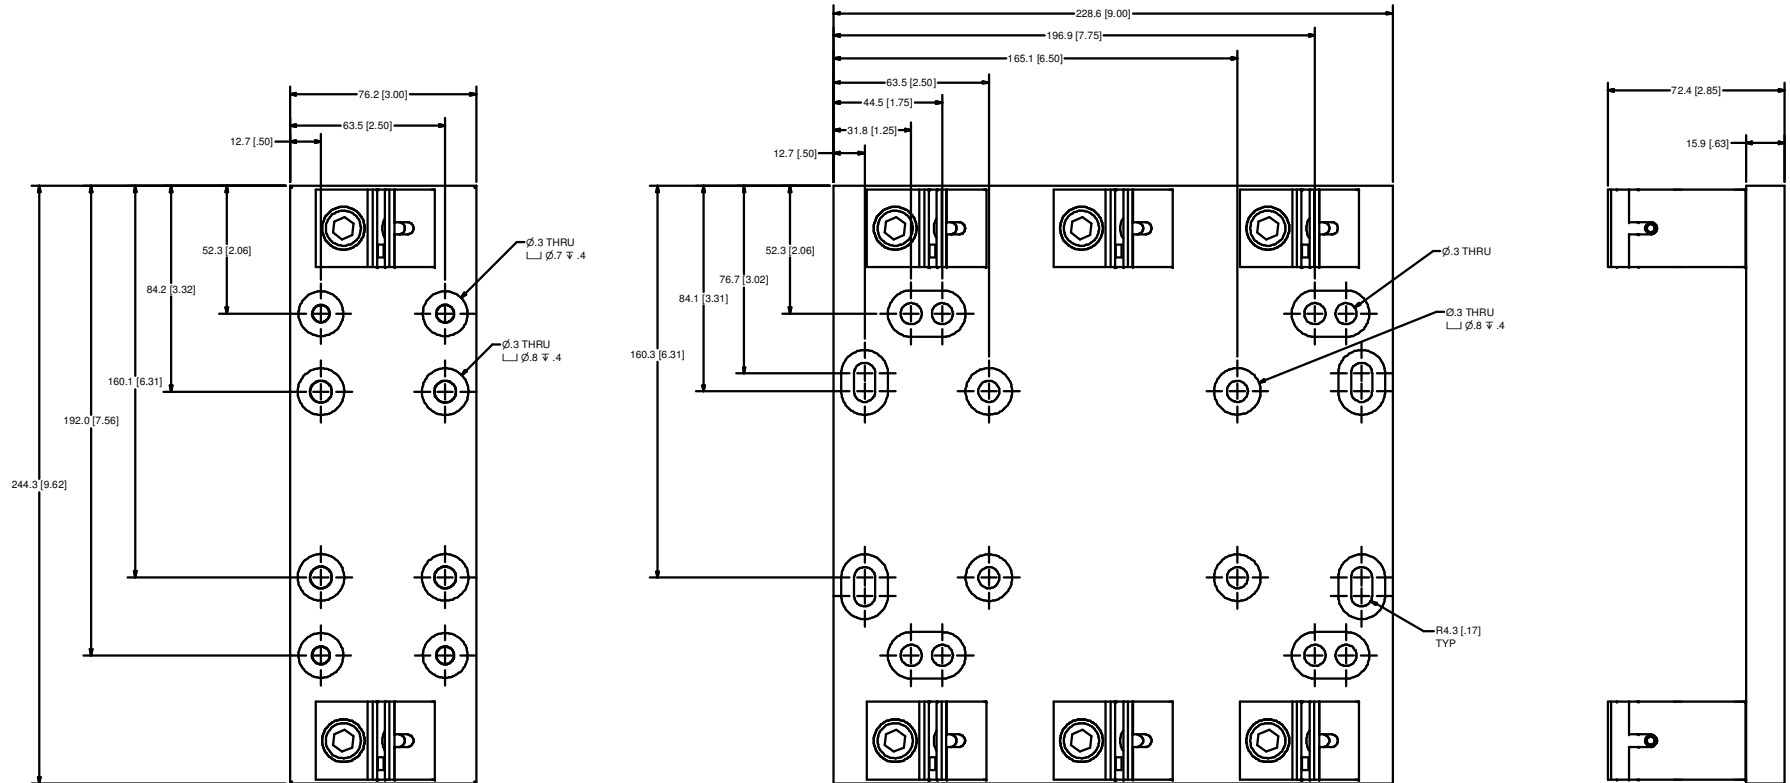

**SPECIFICATIONS:**

- VOLTAGE RATING:** 600V
- AMPERE RATING:** 200 AMPERES
- INTERRUPT RATING:** 10kA
- TERMINAL TYPE:** BOX LUG
- SUGGESTED TORQUE:** 31.1 N-m (275 IN-LBS)
- WIRE RANGE:** 250kcmil-6 AWG Cu/Al  
SOLID/STRANDED
- APPROVALS:** UL LISTED (FILE NO. E14721)  
CSA CERTIFIED (FILE NO. LR73091)

|  |  |                    |                |
|--|--|--------------------|----------------|
| ●  | DENOTES CRITICAL CHARACTERISTICS.  |                    |                |
| CPK  | DENOTES CPK DIMENSIONS, MINIMUM CPK VALUE  |                    |                |
| Ⓢ  | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTOR INSTRUCTIONS |                    |                |
| CP   | DENOTES CP DIMENSIONS, MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.              |                    |                |
| FINISH SPEC  | FINISH   |                    |                |
| DRW  | DATE   | SCALE              | FINISH GOOD WT |
| 14-1008  | 01/1/2010  | 1:1                | 0.0000         |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [ ] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994. |  |                    |                |
| JOB NO.  | TITLE  |                    |                |
|  | LFH60200 OUTLINE   |                    |                |
|  | REVISION   | DRWG NO.           | SHEET 1 OF 1   |
|  | A  | OL-LFH60200 Series |                |