
© 2020 ENTRELEC. All Rights Reserved.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECO-20-012219	11SEP2020	GK	DR

Listed	Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

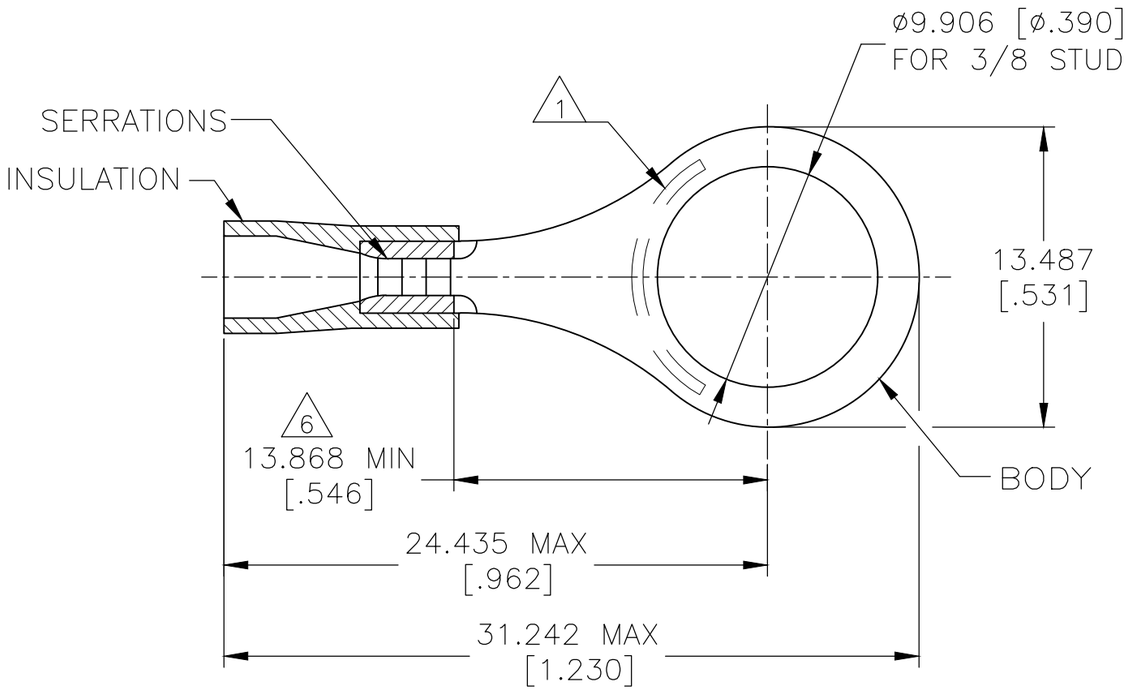

1. STAMP AMP 22-18* APPROX AS SHOWN WIRE RANGE IS 22-16 AWG

2. WIRE INSULATION DIAMETER: ø2.667- 3.556 [ø.105-.140]

3. BODY MATERIAL THK: 0.787±0.051 [.031±.002]

4. MATERIAL: BODY - CU PER ASTM B152
   INSULATION - PVC

5. FINISH: BODY - TIN PLATE 0.00254 [.000100] MIN EXT THK PER ASTM B545
   INSULATION COLOR - RED

6. APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE

QTY	DESIGNATION	ENTRELEC PN	TE PN
100	RT015-100-V	1SET121008R0000	34152

THIS DRAWING IS A CONTROLLED DOCUMENT.

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]

VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN)

CIRCULAR MIL AREA: 0.26-1.65mm² [509-3260] SOLID OR STRANDED

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± 0.127[.005]
4 PLC	± -
ANGLES	± -

MATERIAL: -4

FINISH: -5

DWN	11SEP2020 GOPALAKRISHNA HV
CHK	11SEP2020 ROHDE DANIEL F
APVD	11SEP2020 ROHDE DANIEL F
PRODUCT SPEC	UL 486A-B
APPLICATION SPEC	114-2161
WEIGHT	

ENTRELEC Electrical Solutions

NAME: TERMINAL, RING TONGUE, PLASTI-GRIP WIRE SIZE, 22-16 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1SET121008R0000	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV A

1470-19 (1/15)