
© 2020 ENTRELEC. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECO-20-012219	02SEP2020	GK	DR

Listed	Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

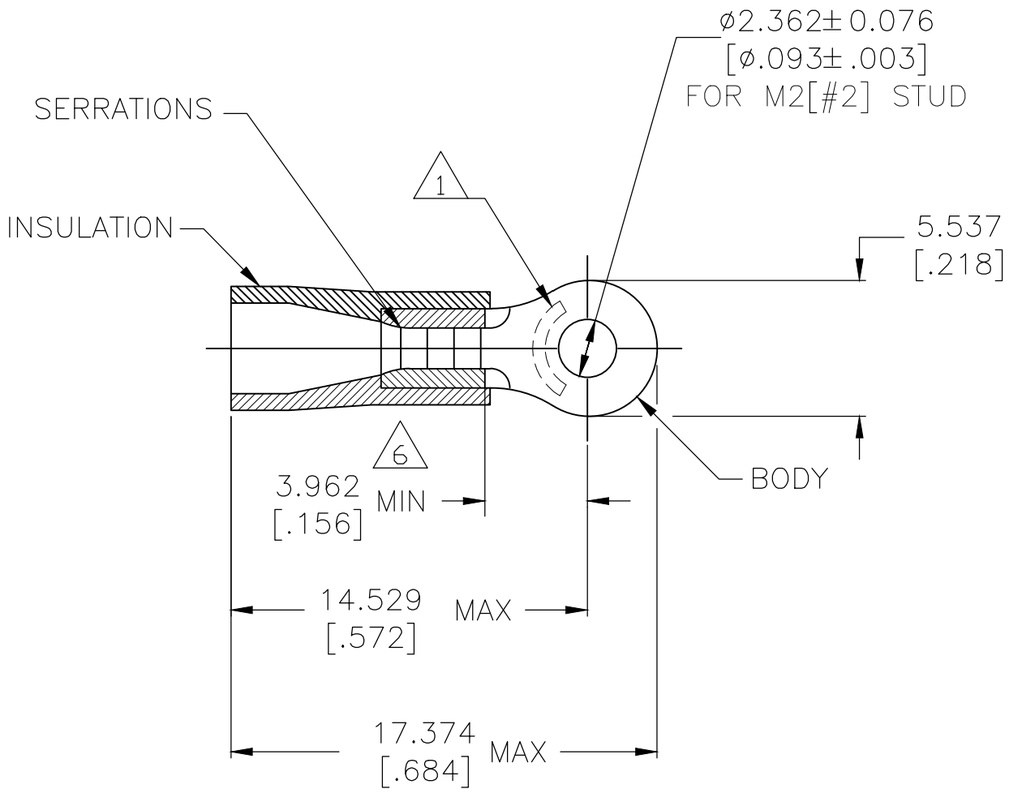

1. STAMP AMP 22-18* APPROX AS SHOWN
   WIRE RANGE IS 22-16 AWG
2. WIRE INSULATION DIA: ø2.667-3.556[ø.105-.140]
3. BODY MATERIAL THK: 0.787±.051[.031±.002]
4. MATERIAL: BODY - CU PER ASTM B152
   INSULATION - PVC
5. FINISH: BODY - TIN PLATE 0.00254 [.000100] MIN EXT THK PER ASTM B545
   INSULATION COLOR - RED
6. APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE

QTY	DESIGNATION	ENTRELEC PN	TE PN
100	RT015-020-V	1SET121001R0000	34140

THIS DRAWING IS A CONTROLLED DOCUMENT.

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]

VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN)

CIRCULAR MIL AREA: 0.26-1.65mm² [509-3260] SOLID OR STRANDED

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± 0.127[.005]
4 PLC ± -
ANGLES ± -

MATERIAL 4

FINISH 5

DWN 02SEP2020 GOPALAKRISHNA HV
CHK 02SEP2020 ROHDE DANIEL F
APVD 02SEP2020 ROHDE DANIEL F
PRODUCT SPEC UL 486A-B
APPLICATION SPEC 114-2161
WEIGHT

ENTRELEC Electrical Solutions

NAME
TERMINAL, RING TONGUE,
PLASTI-GRIP,
WIRE SIZE, 22-16 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3		C-1SET121001R0000	—

CUSTOMER DRAWING

SCALE	SHEET	REV
4:1	1 OF 1	A