
© 2020 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECO-20-012219	18NOV2020	GK	DR

Listed	Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

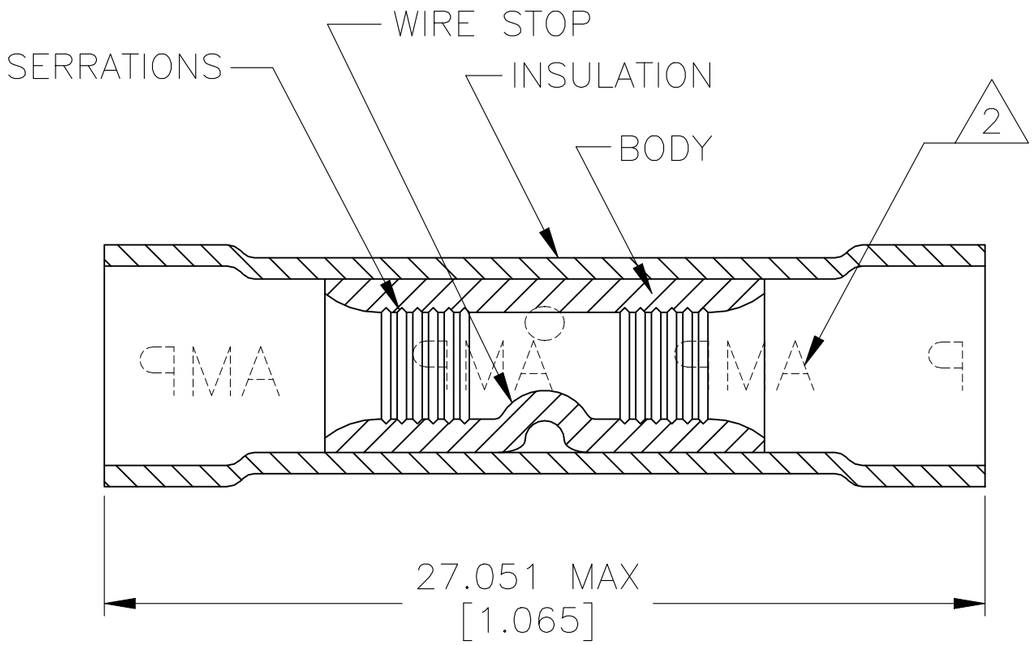

1. WIRE INSULATION DIAMETER: ø2.921-4.318 [ø.115-.170]

2 INSULATION STAMPED AMP APPROX AS SHOWN

3 MATERIAL: BODY - COPPER PER ASTM B152
INSULATION - PVC

4 FINISH: BODY - TIN PLATE 0.00254 [.000100] MIN EXT THK PER ASTM B545
INSULATION COLOR - BLUE

QTY	DESIGNATION	ENTRELEC PN	TE PN
100	SP025	1SET141003R0000	34071

THIS DRAWING IS A CONTROLLED DOCUMENT.

MAX RECOMMENDED OPERATING TEMPERATURE:	105°C [221° F]
VOLTAGE RATING:	600V MAX (1000V FIXTURE OR SIGN)
CIRCULAR MIL AREA:	1.04-2.62mm² [2,050-5,180] SOLID OR STRANDED

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± 0.127[.005]
4 PLC	± -
ANGLES	± -

MATERIAL -3

FINISH -4

DWN	18NOV2020 GOPALAKRISHNA HV
CHK	18NOV2020 ROHDE DANIEL F
APVD	18NOV2020 ROHDE DANIEL F
PRODUCT SPEC	UL 486A-B
APPLICATION SPEC	114-2161
WEIGHT	-

ENTRELEC
Electrical Solutions

NAME
SPLICE, BUTT, PLASTI-GRIP
WIRE SIZE 16-14 AWG
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1SET141003R0000	-

CUSTOMER DRAWING

SCALE	SHEET	REV
4:1	1 OF 1	A