

© 2020 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECO-20-012219	18NOV2020	GK	DR

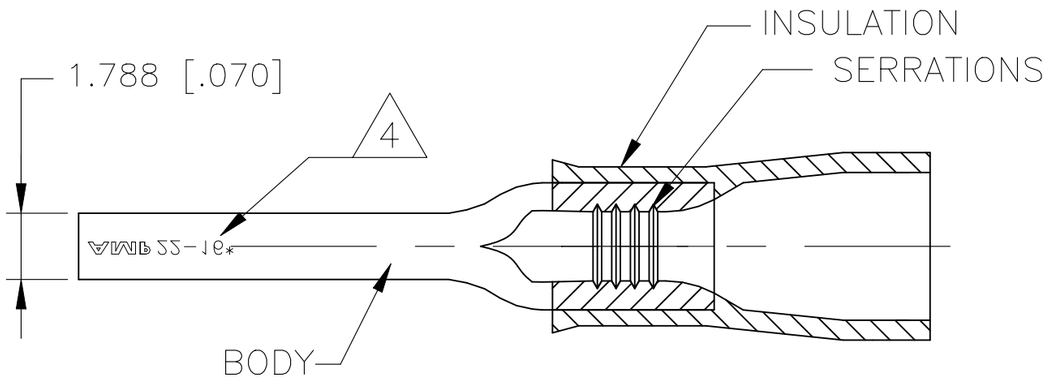

UL	CSA Certified
22-16 AWG STRANDED	22-16 AWG STRANDED

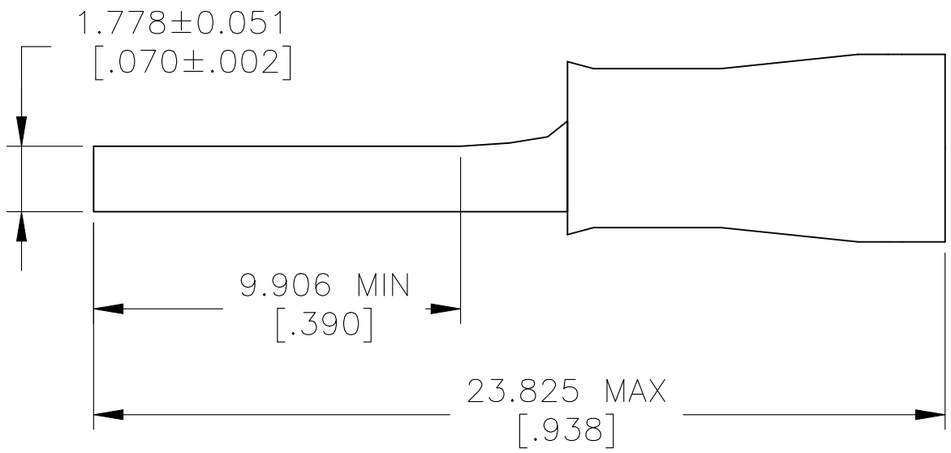

1. WIRE INSULATION DIAMETER: ø3.556[.140] MAX

2 MATERIAL: BODY – CU PER ASTM B152
INSULATION – PVC

3 FINISH: BODY – TIN PLATE 0.00254 [.000100] MIN EXT THK PER ASTM B545
INSULATION COLOR – RED

4 STAMP AMP 22-16* APPROX AS SHOWN

QTY	DESIGNATION	ENTRELEC PN	TE PN
100	WP015-V	1SET151002R0000	165167

THIS DRAWING IS A CONTROLLED DOCUMENT.

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]

VOLTAGE RATING: 600 V MAX (1000 V SIGN OR FIXTURE)

CIRCULAR MIL AREA: 0.26-1.65 mm² [509-3,260] STRANDED

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± 0.127 [.005]
4 PLC ± –
ANGLES ± –

MATERIAL – 2

FINISH – 3

DWN 18NOV2020 GOPALAKRISHNA HV
CHK 18NOV2020 ROHDE DANIEL F
APVD 18NOV2020 ROHDE DANIEL F
PRODUCT SPEC UL 486A-B
APPLICATION SPEC 114-2161
WEIGHT –

ENTRELEC
Electrical Solutions

NAME
TERMINAL, WIRE PIN, PLASTI-GRIP
WIRE SIZE, 22-16 AWG
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1SET151002R0000	–

CUSTOMER DRAWING | SCALE 6:1 | SHEET 1 OF 1 | REV A