


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECO-20-012219	30NOV2020	GK	DR




12-10 AWG
STRANDED

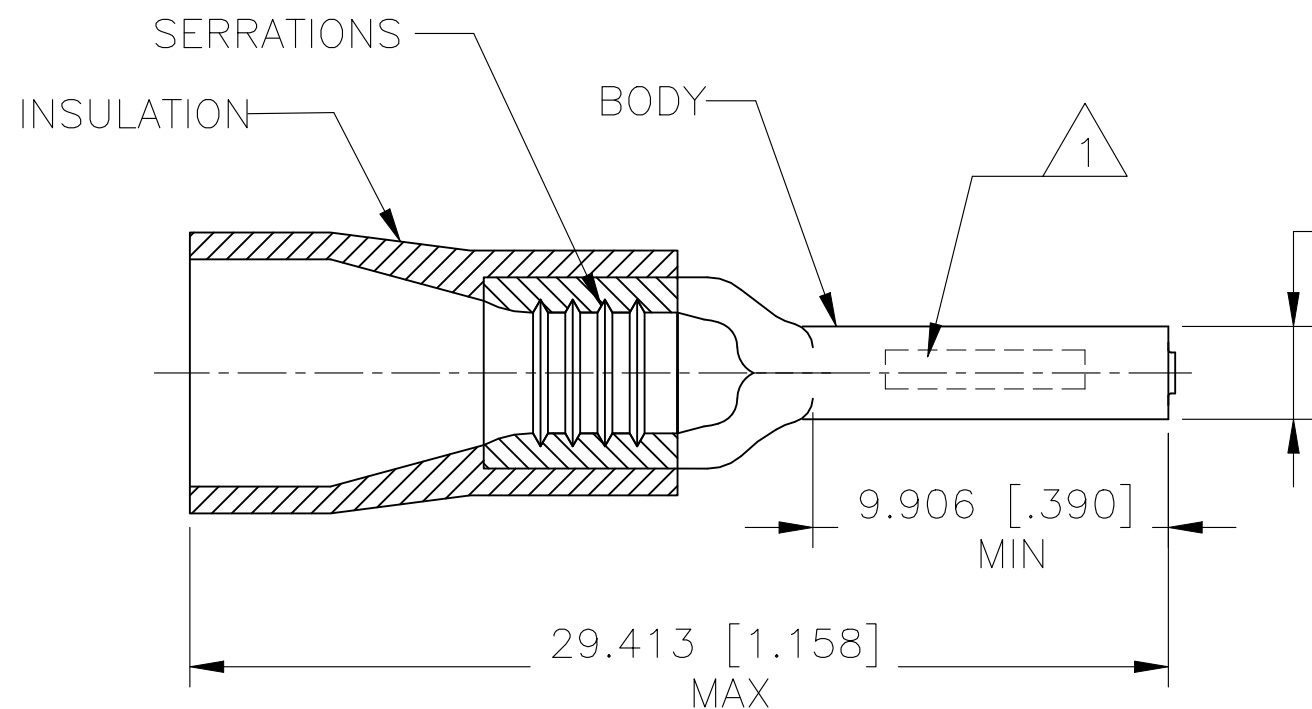

2.591 [.102]

- 1 STAMP AMP 12-10* APPROX AS SHOWN.
2. WIRE INSULATION DIAMETER: $\varnothing 3.810-6.350$ [.150-.250]
- 3 MATERIAL: BODY - COPPER PER ASTM B152
INSULATION - PVC
- 4 FINISH: BODY - TIN PLATE 0.00254 [.000100] MIN EXT THK PER ASTM B545
INSULATION COLOR - YELLOW

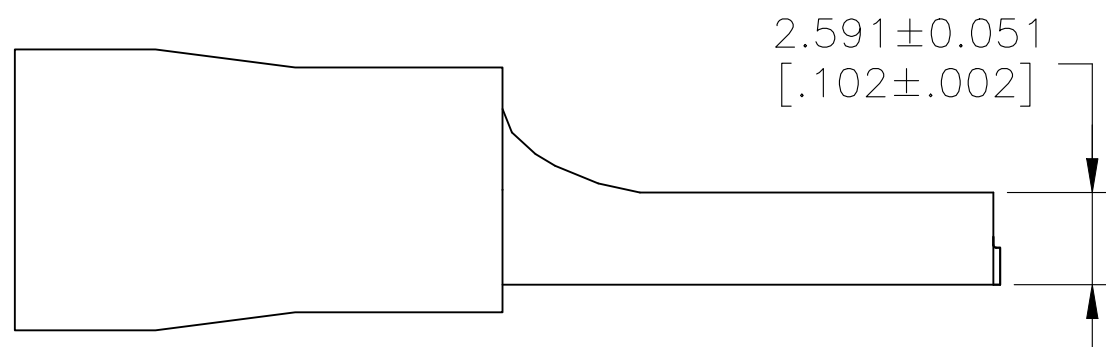

100	WP060-V	1SET151005R0000	165085
QTY	DESIGNATION	ENTRELEC PN	TE PN

	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GOPALAKRISHNA HV 30NOV2020	ENTRELEC Electrical Solutions			
MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -	CHK ROHDE DANIEL F 30NOV2020	NAME TERMINAL, WIRE PIN, PLASTI-GRIP WIRE SIZE 12-10 AWG			
			APVD ROHDE DANIEL F 30NOV2020				
VOLTAGE RATING: 600 V MAX			PRODUCT SPEC UL 486A-B	SIZE CAGE CODE DRAWING NO RESTRICTED TO			
			APPLICATION SPEC 114-2161				
CIRCULAR MIL AREA: 2.62-6.64mm² [5,180-13,100] STRANDED	MATERIAL 	FINISH 	WEIGHT -	A3	00779	C-1SET151005R0000	-
CUSTOMER DRAWING				SCALE 4:1	SHEET 1 OF 1	REV A	