
© 2020 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECO-20-012219	18NOV2020	GK	DR

Listed	Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

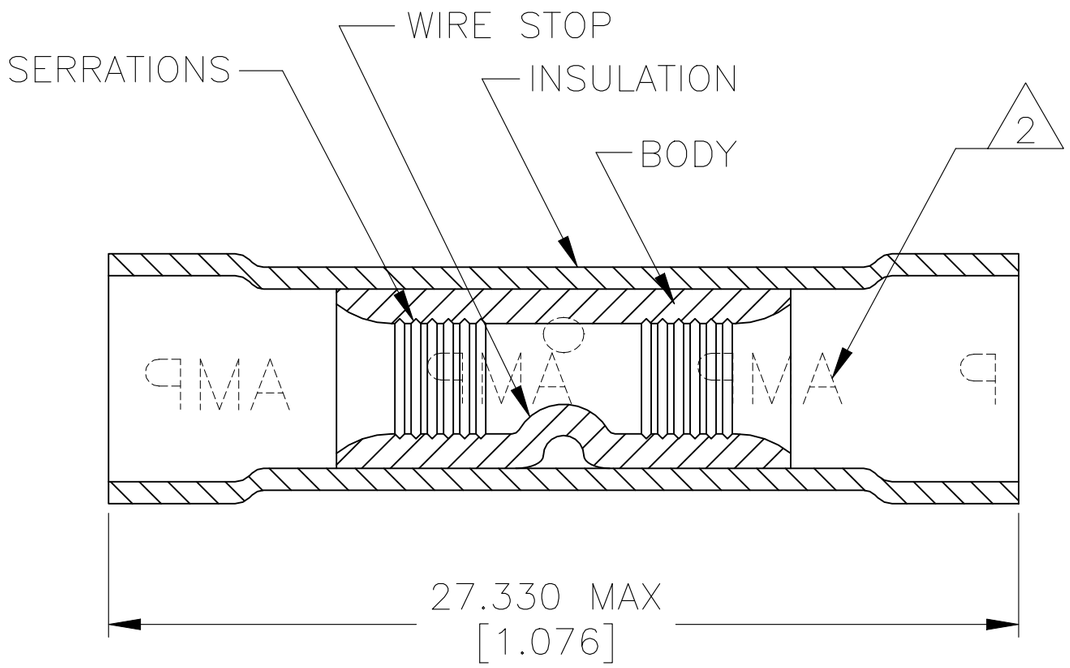

1. WIRE INSULATION DIAMETER: ø2.667-3.556 [ø.105-.140]

2 INSULATION STAMPED AMP APPROX AS SHOWN

3 MATERIAL: BODY - COPPER PER ASTM B152
INSULATION - PVC

4 FINISH: BODY - TIN PLATE 0.00254 [.000100] MIN EXT THK PER ASTM B545
INSULATION COLOR - RED

QTY	DESIGNATION	ENTRELEC PN	TE PN
100	SP015	1SET141002R0000	34070

MAX RECOMMENDED OPERATING TEMPERATURE:
105° C [221° F]

VOLTAGE RATING:
600V MAX
1000V (FIXTURES OR SIGNS)

CIRCULAR MIL AREA:
0.26mm² - 1.65mm² [509-3260]
SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± 0.127[.005]
4 PLC ± -
ANGLES ± -

MATERIAL -3

FINISH -4

DWN	18NOV2020	GOPALAKRISHNA HV
CHK	18NOV2020	ROHDE DANIEL F
APVD	18NOV2020	ROHDE DANIEL F
PRODUCT SPEC		UL 486A-B
APPLICATION SPEC		114-2161
WEIGHT		-

ENTRELEC
Electrical Solutions

NAME
SPLICE, BUTT, PLASTI-GRIP
WIRE SIZE, 22-16 AWG
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1SET141002R0000	-

CUSTOMER DRAWING

SCALE	SHEET	REV
4:1	1 OF 1	A