
© 2020 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECO-20-012219	13NOV2020	GK	DR

Listed	Certified
12 AWG STRANDED	12-10 AWG SOLID OR STRANDED

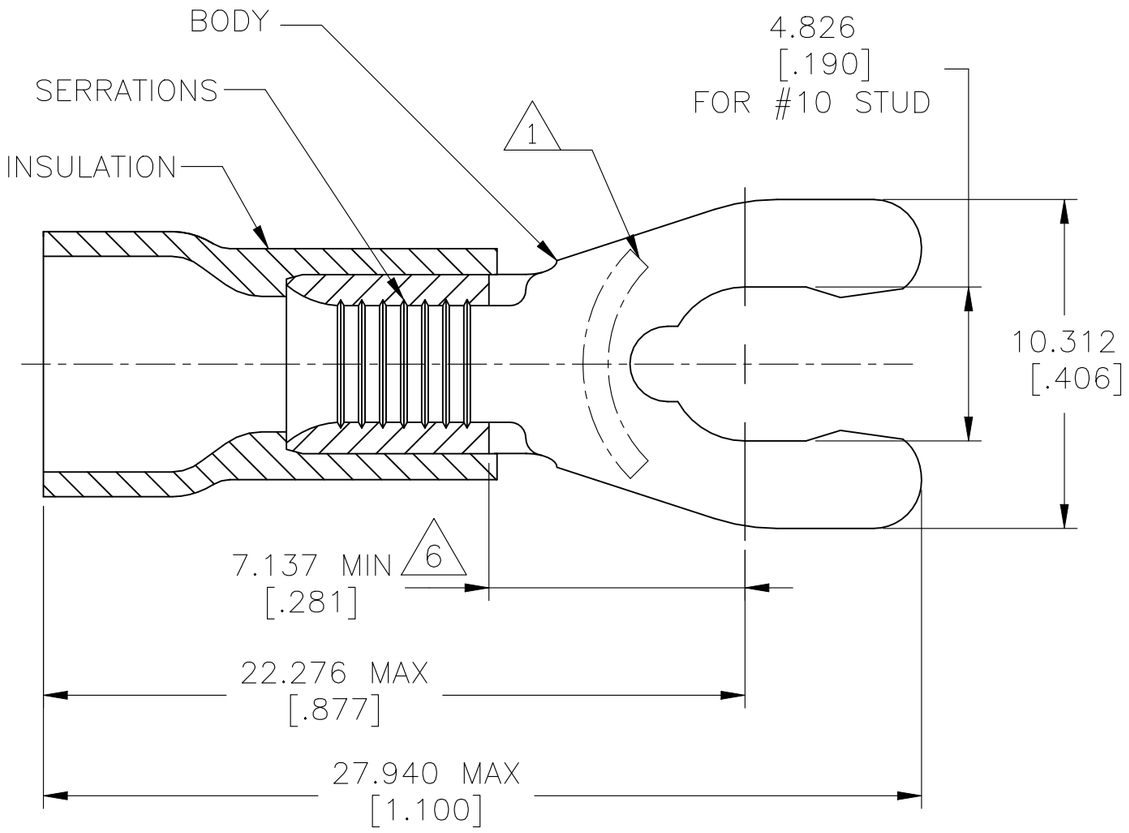

1. STAMP 10S AMP 12-10* APPROX AS SHOWN
2. WIRE INSULATION DIAMETER: ø3.810- 6.350 [ø.150-.250]
3. BODY MATERIAL THK: 1.016±0.051 [.040±.002]
4. MATERIAL: BODY - BRASS PER ASTM B36
   INSULATION - PVC
5. FINISH: BODY - TIN PLATE 0.00254 [.000100] MIN EXT THK PER ASTM B545
   INSULATION COLOR - YELLOW
6. APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE

QTY	DESIGNATION	ENTRELEC PN	TE PN
100	SDS060-050-V	1SET133011R0000	52963-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

MAX RECOMMENDED OPERATING TEMPERATURE:	105°C [221°F]
VOLTAGE RATING:	600V MAX (1000V FIXTURE OR SIGN)
CIRCULAR MIL AREA:	2.62-6.64mm² [5,180-13,100] SOLID OR STRANDED

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± 0.127[.005]
4 PLC	± -
ANGLES	± -

MATERIAL - 4

FINISH - 5

DWN	13NOV2020 GOPALAKRISHNA HV
CHK	13NOV2020 ROHDE DANIEL F
APVD	13NOV2020 ROHDE DANIEL F
PRODUCT SPEC	UL 486A-B
APPLICATION SPEC	114-2161
WEIGHT	-

ENTRELEC
Electrical Solutions

NAME: TERMINAL, SPRING SPADE, SHORT, PLASTI-GRIP
WIRE SIZE: 12-10 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1SET133011R0000	-

CUSTOMER DRAWING

SCALE	SHEET	REV
6:1	1 OF 1	A