
© 2020 ENTRELEC. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECO-20-012219	11SEP2020	GK	DR

Listed	Certified
12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED

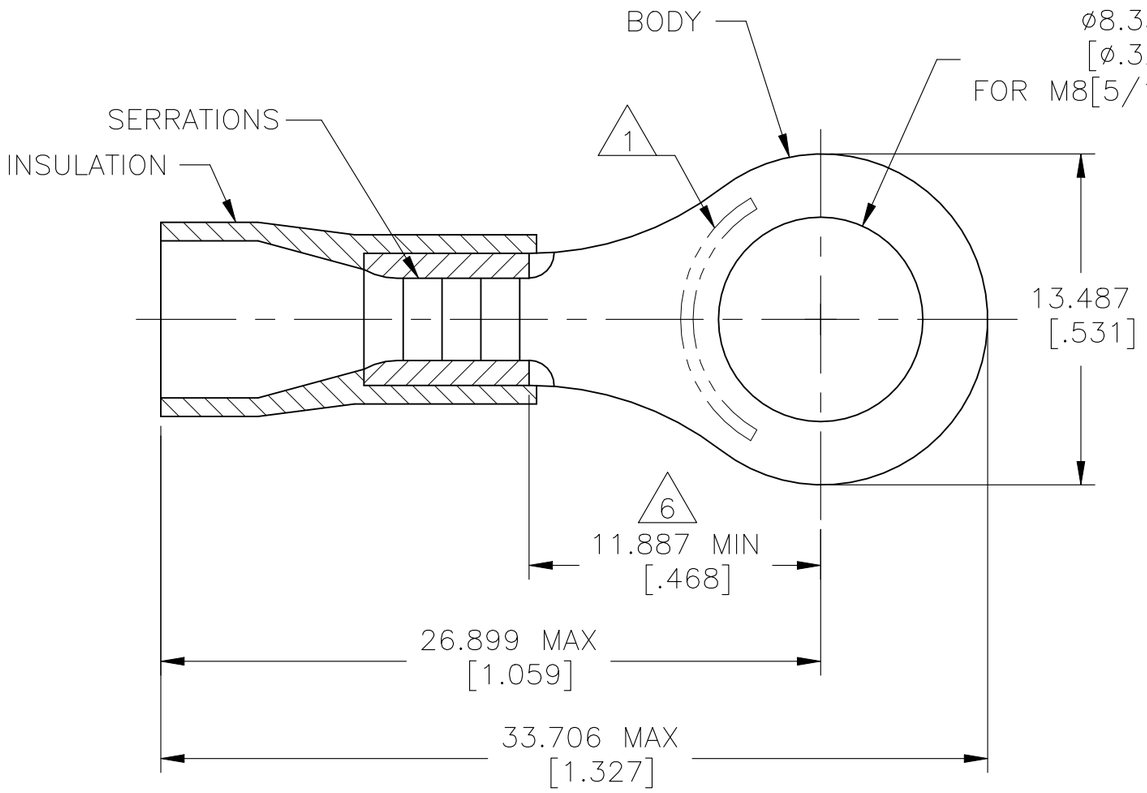

1 STAMP AMP 12-10* APPROX AS SHOWN

2. WIRE INSULATION DIAMETER: ø3.810- 6.350 [ø.150-.250]

3. BODY MATERIAL THK: 0.991±0.051 [.039±.002]

4 MATERIAL: BODY - CU PER ASTM B152
INSULATION - PVC

5 FINISH: BODY - TIN PLATE 0.00254 [.000100] MIN EXT THK PER ASTM B545
INSULATION COLOR - YELLOW

6 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE

QTY	DESIGNATION	ENTRELEC PN	TE PN
100	RT060-080-V	1SET121019R0000	34856

THIS DRAWING IS A CONTROLLED DOCUMENT.

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]

VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN)

CIRCULAR MIL AREA: 2.62-6.64mm² [5180-13100] SOLID OR STRANDED

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± 0.127[.005]
4 PLC ± -
ANGLES ± -

MATERIAL -4

FINISH -5

DWN 11SEP2020 GOPALAKRISHNA HV
CHK 11SEP2020 ROHDE DANIEL F
APVD 11SEP2020 ROHDE DANIEL F
PRODUCT SPEC UL 486A-B
APPLICATION SPEC 114-2161
WEIGHT

CUSTOMER DRAWING

ENTRELEC
Electrical Solutions

NAME
TERMINAL, RING TONGUE, PLASTI-GRIP
WIRE SIZE: 12-10 AWG
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1SET121019R0000	-

SCALE	SHEET	REV
4:1	1 OF 1	A

1470-19 (1/15)