



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECO-20-012219	04SEP2020	GK	DR

 Listed	 Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

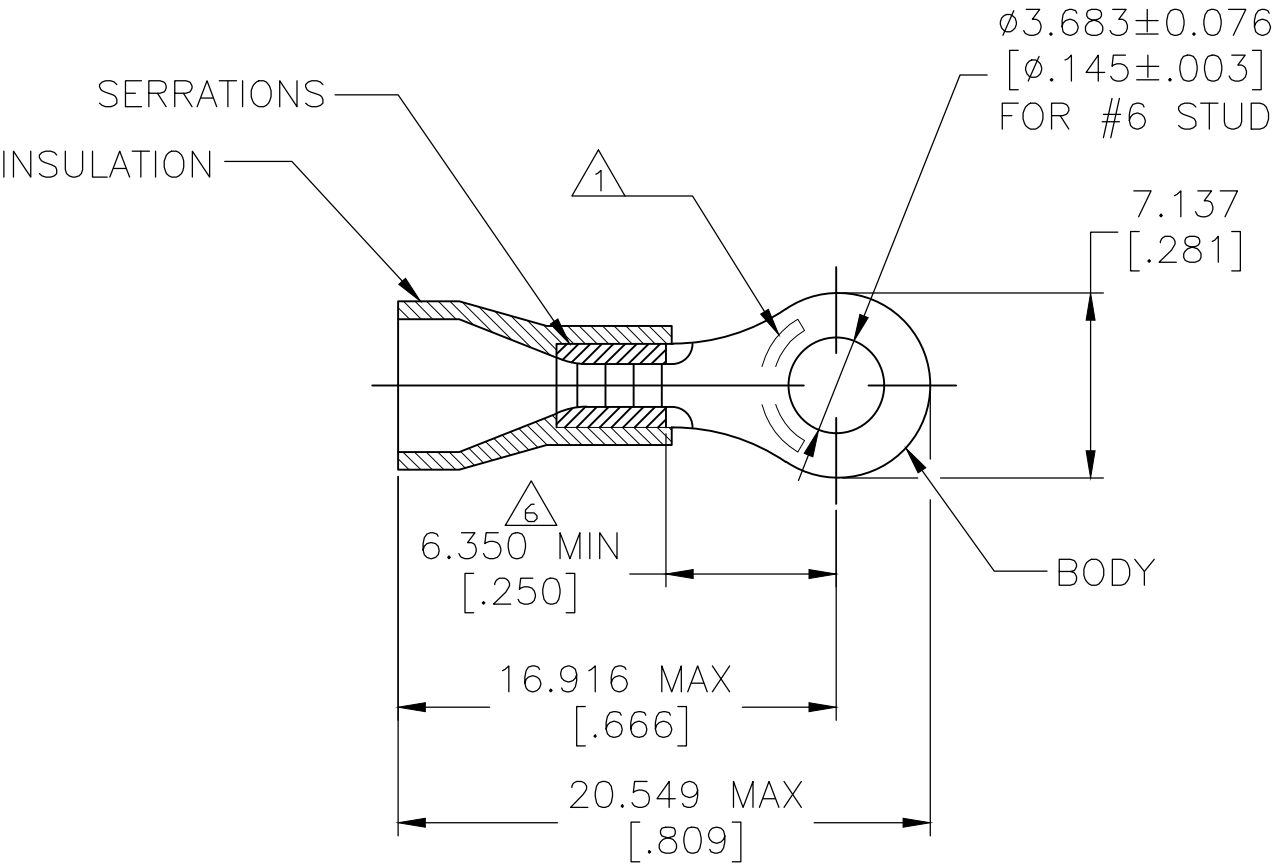

- 1 STAMP AMP 22-18* APPROX AS SHOWN
WIRE RANGE IS 22 - 16 AWG
2. WIRE INSULATION DIA: $\varnothing 2.667 - 3.556$ [$\varnothing .105-.140$]
3. BODY MATERIAL THK: 0.787 ± 0.051 [$.031\pm .002$]
- 4 MATERIAL: BODY - CU PER ASTM B152
INSULATION - PVC
- 5 FINISH: BODY - TIN PLATE 0.00254 [$.000100$] MIN EXT THK PER ASTM B545
INSULATION COLOR - RED
- 6 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE

100	RT015-035-V	1SET121003R0000	34144
QTY	DESIGNATION	ENTRELEC PN	TE PN

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F] VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN) CIRCULAR MIL AREA: 0.26-1.65mm² [509-3260] SOLID OR STRANDED	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GOPALAKRISHNA HV 04SEP2020 CHK ROHDE DANIEL F 04SEP2020 APVD ROHDE DANIEL F 04SEP2020	ENTRELEC Electrical Solutions		
	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC UL 486A-B	NAME TERMINAL, RING TONGUE, PLASTI-GRIP WIRE SIZE, 22-16 AWG		
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -	APPLICATION SPEC 114-2161	SIZE A3	CAGE CODE 00779	DRAWING NO C-1SET121003R0000
	MATERIAL - 4	FINISH - 5	WEIGHT	RESTRICTED TO -		
CUSTOMER DRAWING				SCALE 4:1	SHEET 1 OF 1	REV A