



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECO-20-012219	11SEP2020	GK	DR

 Listed	 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

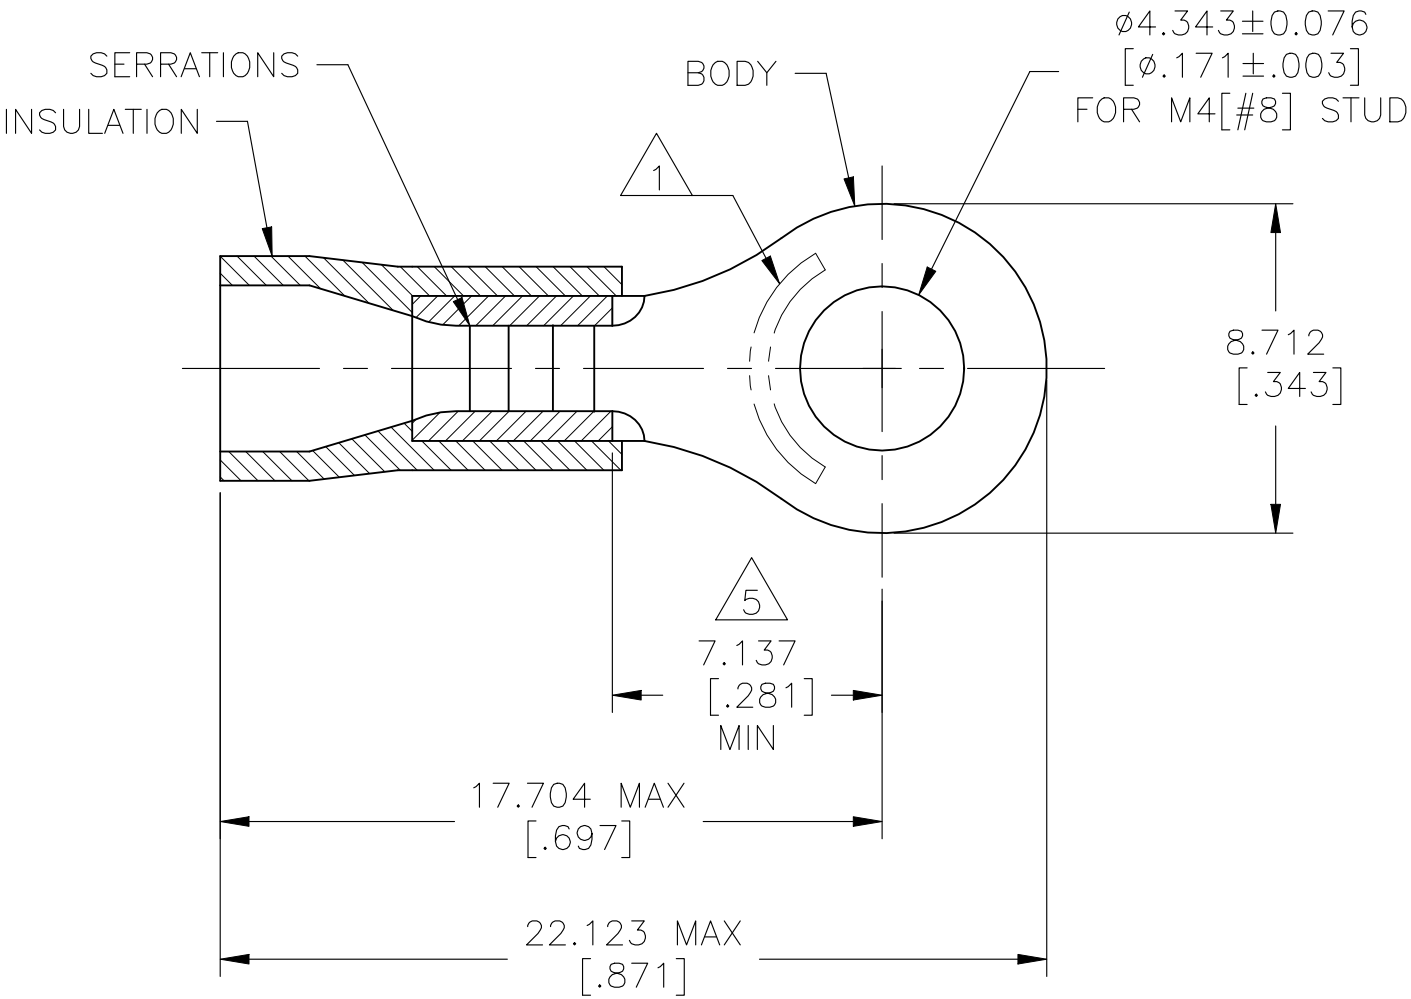

1. STAMP AMP 16-14* APPROX AS SHOWN
2. BODY MATERIAL THK: $\phi 0.787 \pm 0.051$ [$\phi .031 \pm .002$]
3. MATERIAL: BODY - CU PER ASTM B152
INSULATION - PVC
4. FINISH: BODY - TIN PLATE 0.00254 [$.000100$] MIN EXT THK PER ASTM B545
INSULATION COLOR - BLUE
5. APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE
6. WIRE INSULATION DIAMETER: $\phi 2.997 - 4.902$ [$\phi .118 - .193$]

100	RT025-040-V	1SET121010R0000	34160
QTY	DESIGNATION	ENTRELEC PN	TE PN

	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 11SEP2020 GOPALAKRISHNA HV CHK 11SEP2020 ROHDE DANIEL F APVD 11SEP2020 ROHDE DANIEL F PRODUCT SPEC UL 486A-B APPLICATION SPEC 114-2161 WEIGHT		ENTRELEC Electrical Solutions			
MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME TERMINAL, RING TONGUE, PLASTI-GRIP, WIRE SIZE, 16-14 AWG			
VOLTAGE RATING: 600 V (1000 V FIXTURE OR SIGN)		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -						
CIRCULAR MIL AREA: 1.04-2.62mm² [2,050-5,180] SOLID OR STRANDED	MATERIAL 	FINISH 			SIZE A3	CAGE CODE 00779	DRAWING NO C-1SET121010R0000	RESTRICTED TO —
CUSTOMER DRAWING					SCALE 4:1	SHEET 1 OF 1	REV A	