
© 2020 ENTRELEC. All Rights Reserved.

| REVISIONS | | | | | |
|---|---|---|---|---|---|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | A | ECO-20-012219 | 22SEP2020 | GK | DR |

| Listed | Certified |
|---|---|
| 22-16 AWG SOLID OR STRANDED | 22-16 AWG SOLID OR STRANDED |

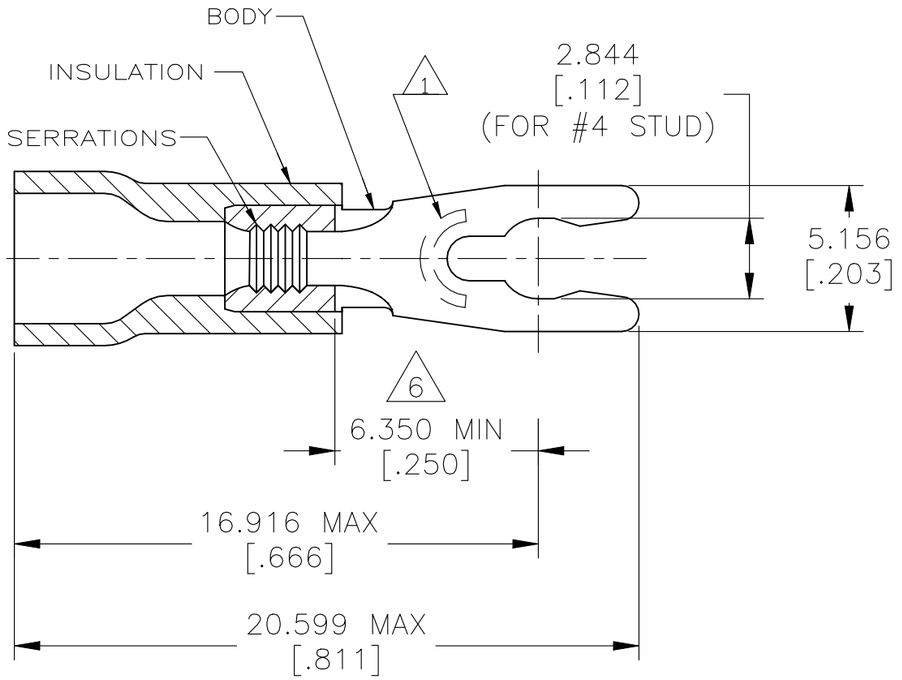


1. STAMP 4S AMP 22-18* APPROX AS SHOWN
WIRE RANGE IS 22-16 AWG

2. WIRE INSULATION DIAMETER: ø2.667- 3.556 [ø.105-.140]

3. BODY MATERIAL THK: 0.787±0.051 [.031±.002]

4. MATERIAL: BODY - BRASS PER ASTM B36
INSULATION - PVC

5. FINISH: BODY - TIN PLATE 0.00254 [.000100] MIN EXT THK PER ASTM B545
INSULATION COLOR - RED

6. APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE

| QTY | DESIGNATION | ENTRELEC PN | TE PN |
|---|---|---|---|
| 100 | SDS015-025-V | 1SET133001R0000 | 52947 |

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | | | |
|---|---|---|---|
| MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F] | DIMENSIONS: mm [INCHES] | TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± - | DWN 22SEP2020 GOPALAKRISHNA HV |
| VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN) | | | CHK 22SEP2020 ROHDE DANIEL F |
| CIRCULAR MIL AREA: 0.26-1.65mm² [509-3260] SOLID OR STRANDED | MATERIAL 4 | FINISH - 5 | APVD 22SEP2020 ROHDE DANIEL F |
| | | | PRODUCT SPEC UL 486A-B |
| | | | APPLICATION SPEC 114-2161 |
| | | | WEIGHT - |

ENTRELEC
Electrical Solutions

NAME
TERMINAL, SPRING SPADE,
SHORT, PLASTI-GRIP,
WIRE SIZE: 22-16 AWG

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A3 | 00779 | C-1SET133001R0000 | - |

CUSTOMER DRAWING

| SCALE | SHEET | REV |
|---|---|---|
| 6:1 | 1 OF 1 | A |