
© 2020 ENTRELEC. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECO-20-012219	22SEP2020	GK	DR

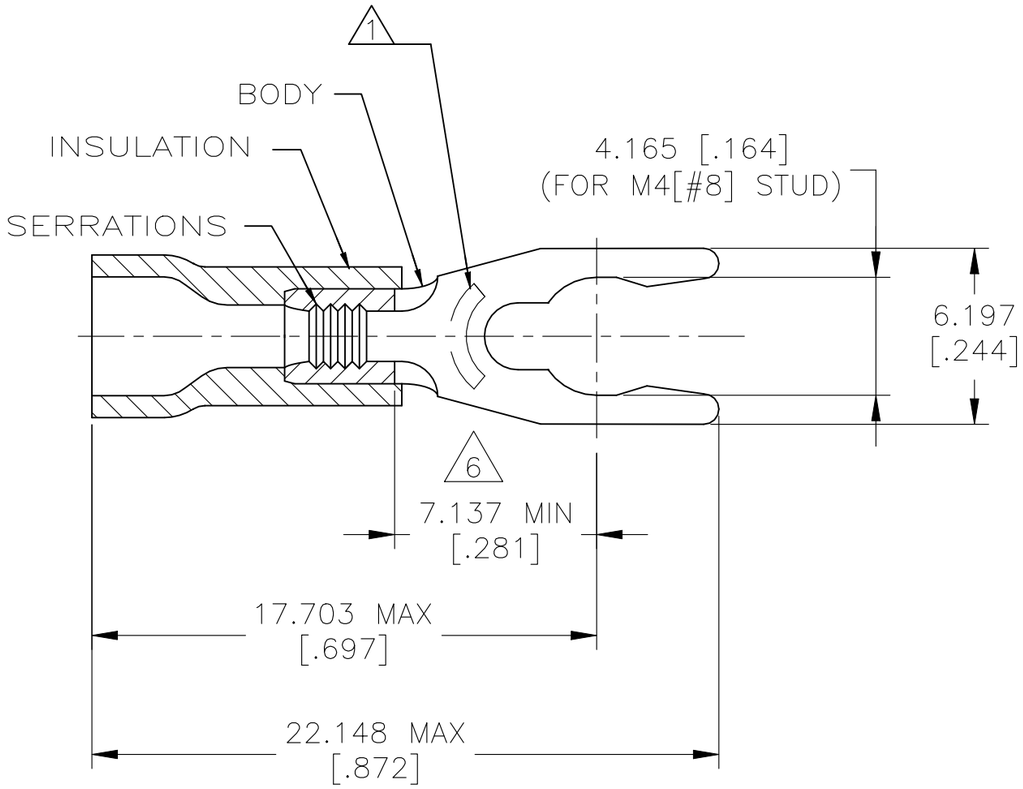

Listed	Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

1. STAMP AMP 8S 22-18* APPROX AS SHOWN
   WIRE RANGE IS 22-16 AWG

2. WIRE INSULATION DIAMETER: ø2.667- 3.556 [ø.105-.140]

3. BODY MATERIAL THK: 0.787±0.051 [.031±.002]

4. MATERIAL: BODY - BRASS PER ASTM B36
   INSULATION - PVC

5. FINISH: BODY - TIN PLATE 0.00254 [.000100] MIN EXT THK PER ASTM B545
   INSULATION COLOR - RED

6. APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE

QTY	DESIGNATION	ENTRELEC PN	TE PN
100	SDS015-040-V	1SET133004R0000	53241-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]

VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN)

CIRCULAR MIL AREA: 0.26-1.65mm² [509-3260] SOLID OR STRANDED

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± 0.127[.005]
4 PLC ± -
ANGLES ± -

MATERIAL 4

FINISH - 5

DWN	22SEP2020	GOPALAKRISHNA HV
CHK	22SEP2020	ROHDE DANIEL F
APVD	22SEP2020	ROHDE DANIEL F
PRODUCT SPEC		UL 486A-B
APPLICATION SPEC		114-2161
WEIGHT		-

ENTRELEC
Electrical Solutions

NAME: TERMINAL, SPRING SPADE, SHORT, PLASTI-GRIP, WIRE SIZE: 22-16 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1SET133004R0000	-

CUSTOMER DRAWING

SCALE 6:1 | SHEET 1 OF 1 | REV A